



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 29.4

PowerEdge R720 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint_base2006 = 27.9

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

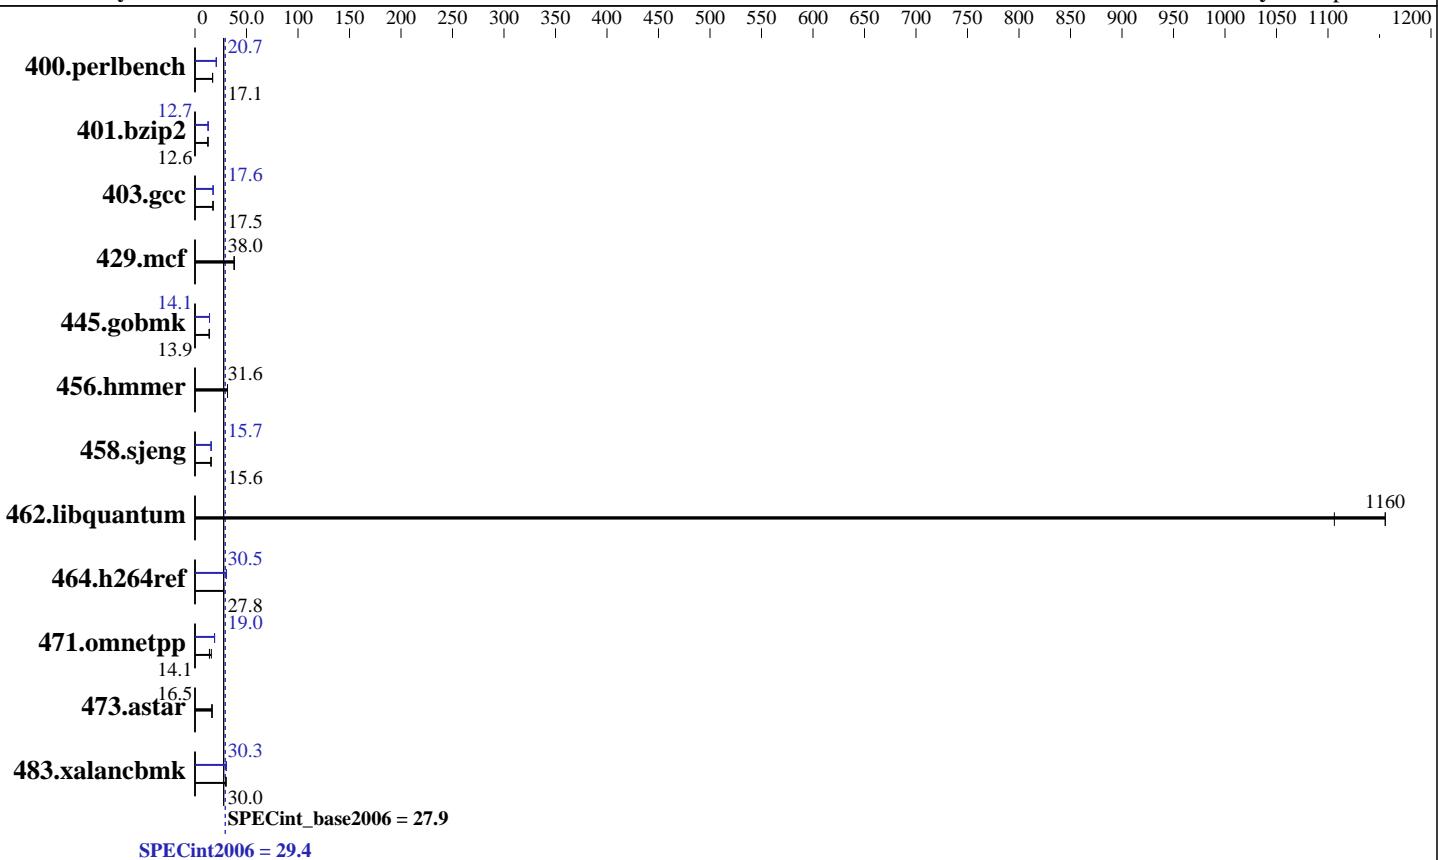

Hardware

CPU Name:	Intel Xeon E5-2603 v2
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem:	1 x 1 TB 7200 RPM SATA
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 SP3 (x86_64) 3.0.76-0.11-default
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 29.4

PowerEdge R720 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint_base2006 = 27.9

CPU2006 license: 55

Test date: Aug-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	572	17.1	573	17.1	572	17.1	473	20.7	472	20.7	471	20.7
401.bzip2	767	12.6	767	12.6	768	12.6	757	12.8	757	12.7	757	12.7
403.gcc	460	17.5	459	17.5	460	17.5	458	17.6	458	17.6	458	17.6
429.mcf	239	38.1	240	38.0	240	38.0	239	38.1	240	38.0	240	38.0
445.gobmk	755	13.9	756	13.9	758	13.8	745	14.1	745	14.1	744	14.1
456.hammer	295	31.6	296	31.5	296	31.6	295	31.6	296	31.5	296	31.6
458.sjeng	778	15.6	777	15.6	777	15.6	772	15.7	772	15.7	772	15.7
462.libquantum	17.9	1160	17.9	1160	18.7	1110	17.9	1160	17.9	1160	18.7	1110
464.h264ref	795	27.8	797	27.8	796	27.8	726	30.5	726	30.5	726	30.5
471.omnetpp	443	14.1	394	15.9	446	14.0	329	19.0	330	19.0	329	19.0
473.astar	426	16.5	425	16.5	425	16.5	426	16.5	425	16.5	425	16.5
483.xalancbmk	230	30.0	229	30.1	230	30.0	227	30.4	228	30.3	227	30.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
BIOS settings:
Virtualization Technology disabled
Execute Disable disabled
Logical Processor disabled
System Profile set to Performance
Sysinfo program /root/cpu2006.1.2.ic13/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Fri Aug 30 08:58:17 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 29.4

PowerEdge R720 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint_base2006 = 27.9

CPU2006 license: 55

Test date: Aug-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Platform Notes (Continued)

```
physical 1: cores 0 1 2 3
cache size : 10240 KB

From /proc/meminfo
MemTotal:       264601764 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
SuSE-release:
      SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 30 08:44 last=S

SPEC is set to: /root/cpu2006.1.2.ic13
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  817G   27G  790G   4%  /

Additional information from dmidecode:
BIOS Dell Inc. 2.0.18 08/10/2013
Memory:
8x 00AD00B300AD HMT42GR7MFR4C-RD 16 GB 1333 MHz
8x 00AD04B300AD HMT42GR7AFR4C-RD 16 GB 1333 MHz

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006.1.2.ic13/libs/32:/root/cpu2006.1.2.ic13/libs/64:/root/cpu2006.1.2.ic13/sh"
OMP_NUM_THREADS = "8"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 29.4

PowerEdge R720 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint_base2006 = 27.9

CPU2006 license: 55

Test date: Aug-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hammer: `-DSPEC_CPU_LP64`
458sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 29.4

PowerEdge R720 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint_base2006 = 27.9

CPU2006 license: 55

Test date: Aug-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32`
`-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias`

456.hammer: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 29.4

PowerEdge R720 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint_base2006 = 27.9

CPU2006 license: 55

Test date: Aug-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:04:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 October 2013.