



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.70 GHz, Intel Xeon E5-2697 v2)

**SPECint®2006 = 60.4**

**SPECint\_base2006 = 55.7**

**CPU2006 license:** 3


**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

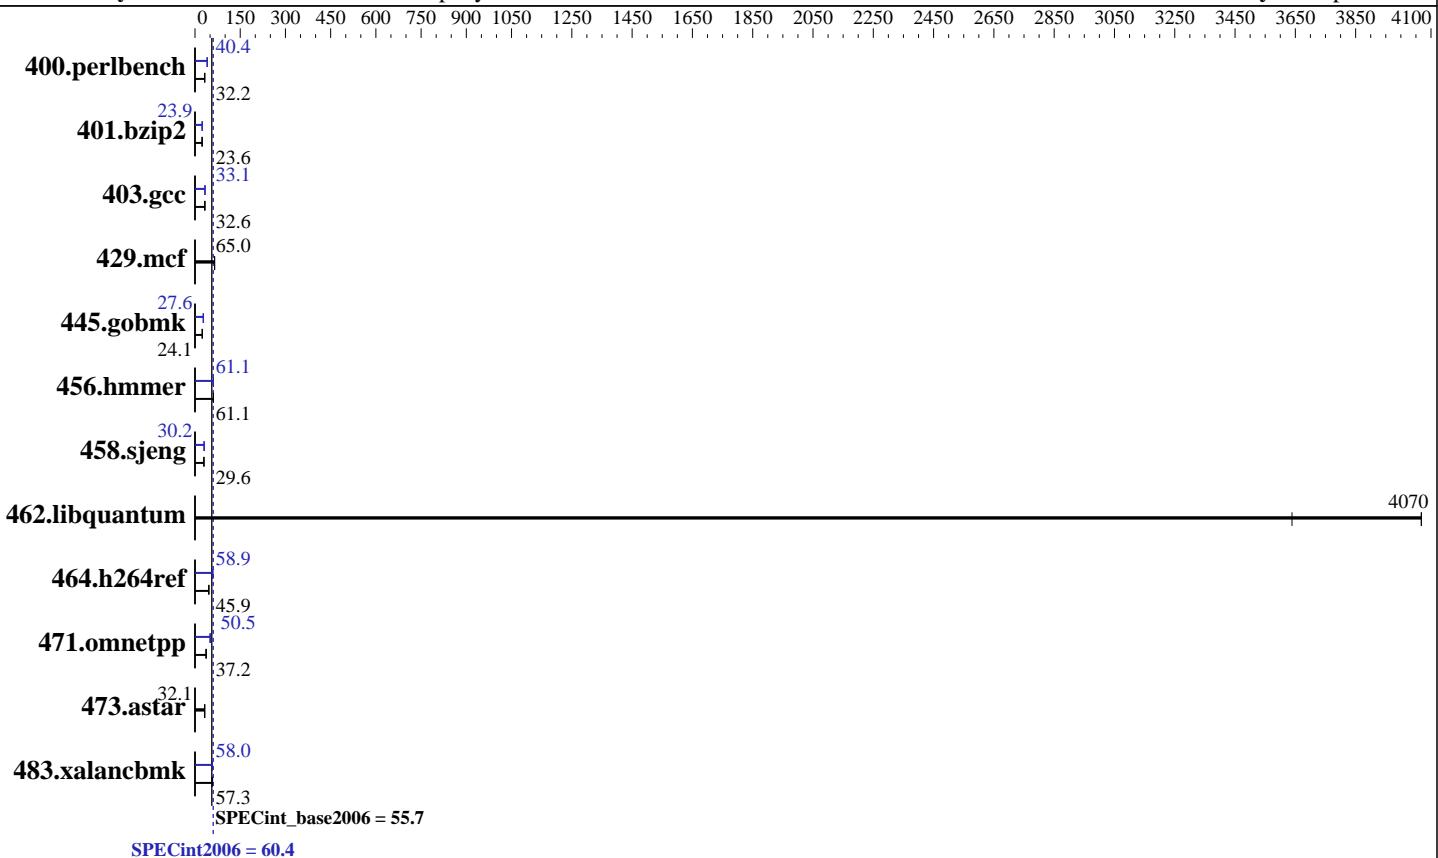

### Hardware

CPU Name: Intel Xeon E5-2697 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
CPU MHz: 2700  
FPU: Integrated  
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 200 GB SAS SSD, RAID 1  
Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP3  
Kernel 3.0.76-0.11.1-default  
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
Auto Parallel: Yes  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.70 GHz, Intel Xeon E5-2697 v2)

**SPECint2006 = 60.4**

**SPECint\_base2006 = 55.7**

CPU2006 license: 3

Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	303	32.2	303	32.2	<b>303</b>	<b>32.2</b>	241	40.5	242	40.4	<b>242</b>	<b>40.4</b>
401.bzip2	409	23.6	<b>409</b>	<b>23.6</b>	409	23.6	<b>404</b>	<b>23.9</b>	405	23.8	404	23.9
403.gcc	247	32.6	<b>247</b>	<b>32.6</b>	246	32.7	<b>243</b>	<b>33.1</b>	243	33.2	243	33.1
429.mcf	140	65.0	140	65.0	<b>140</b>	<b>65.0</b>	140	65.0	140	65.0	<b>140</b>	<b>65.0</b>
445.gobmk	434	24.2	<b>435</b>	<b>24.1</b>	436	24.1	<b>381</b>	<b>27.6</b>	381	27.6	381	27.6
456.hmmer	153	61.0	<b>153</b>	<b>61.1</b>	153	61.1	<b>153</b>	<b>61.1</b>	152	61.2	153	61.1
458.sjeng	<b>408</b>	<b>29.6</b>	408	29.7	409	29.6	401	30.2	<b>401</b>	<b>30.2</b>	401	30.2
462.libquantum	<b>5.09</b>	<b>4070</b>	5.09	4070	5.69	3640	<b>5.09</b>	<b>4070</b>	5.09	4070	5.69	3640
464.h264ref	482	45.9	<b>482</b>	<b>45.9</b>	484	45.8	<b>376</b>	<b>58.9</b>	376	58.9	375	59.0
471.omnetpp	173	36.2	168	37.2	<b>168</b>	<b>37.2</b>	124	50.5	<b>124</b>	<b>50.5</b>	125	49.9
473.astar	219	32.1	<b>219</b>	<b>32.1</b>	218	32.2	<b>219</b>	<b>32.1</b>	<b>219</b>	<b>32.1</b>	218	32.2
483.xalancbmk	118	58.5	<b>120</b>	<b>57.3</b>	121	57.0	<b>119</b>	<b>58.0</b>	119	58.0	<b>119</b>	<b>58.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Platform Notes

BIOS Configuration:

Intel HyperThreading Options set to Disabled

HP Power Profile set to Maximum Performance

Memory Power Savings Mode set to Maximum Performance

Collaborative Power Control set to Disabled

Dynamic Power Capping Functionality set to Disabled

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x

Minimum Processor Idle Power Core State set to C6 State

Minimum Processor Idle Power Package State set to Package C6 (non-retention) State

Sysinfo program /cpu2006/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on BL460cGen8-Sys3 Fri Oct 4 14:47:52 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.70 GHz, Intel Xeon E5-2697 v2)

**SPECint2006 = 60.4**

**SPECint\_base2006 = 55.7**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v2 @ 2.70GHz
  2 "physical id"s (chips)
  24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings : 12
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      132130196 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 11 (x86_64)
  VERSION = 11
  PATCHLEVEL = 3
```

```
uname -a:
Linux BL460cGen8-Sys3 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 4 14:45 last=S
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext3  176G  9.3G  158G   6%  /
```

Additional information from dmidecode:

```
BIOS HP I31 09/08/2013
Memory:
 16x HP 712382-071 8 GB 1866 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the CPU cores from /proc/cpuinfo, the correct mapping should display as cores 0 through 9. The mapping should read as the following:

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9
physical 1: cores 0 1 2 3 4 5 6 7 8 9
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.70 GHz, Intel Xeon E5-2697 v2)

**SPECint2006 = 60.4**

**SPECint\_base2006 = 55.7**

**CPU2006 license:** 3

**Test date:** Oct-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"  
OMP\_NUM\_THREADS = "24"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

  icc -m64

C++ benchmarks:

  icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
  403.gcc: -DSPEC\_CPU\_LP64  
  429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hammer: -DSPEC\_CPU\_LP64  
  458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
  464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
  473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
  -Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.70 GHz, Intel Xeon E5-2697 v2)

**SPECint2006 = 60.4**

**SPECint\_base2006 = 55.7**

CPU2006 license: 3

Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

## Base Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.70 GHz, Intel Xeon E5-2697 v2)

**SPECint2006 = 60.4**

**SPECint\_base2006 = 55.7**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hummer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.70 GHz, Intel Xeon E5-2697 v2)

**SPECint2006 = 60.4**

**SPECint\_base2006 = 55.7**

**CPU2006 license:** 3

**Test date:** Oct-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 18:40:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 October 2013.