



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 637

PowerEdge M620 (Intel Xeon E5-2643 v2, 3.50 GHz)

SPECint_rate_base2006 = 611

CPU2006 license: 55


Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

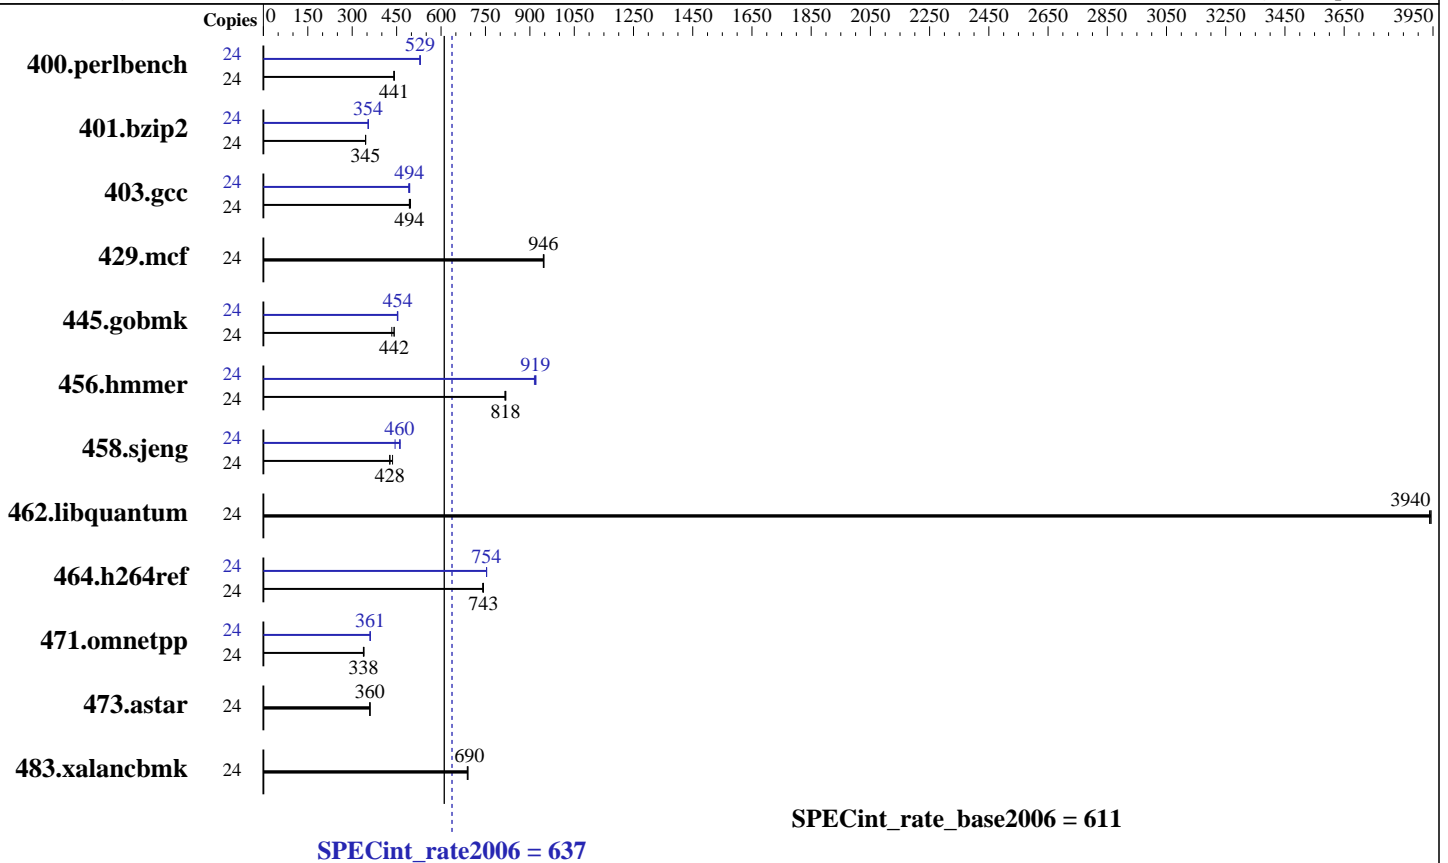

Hardware

CPU Name: Intel Xeon E5-2643 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 250 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 637

PowerEdge M620 (Intel Xeon E5-2643 v2, 3.50 GHz)

SPECint_rate_base2006 = 611

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	532	441	<u>531</u>	<u>441</u>	530	442	24	444	528	<u>443</u>	<u>529</u>	442	530
401.bzip2	24	<u>672</u>	<u>345</u>	672	345	670	346	24	654	354	<u>654</u>	<u>354</u>	653	355
403.gcc	24	389	497	392	493	<u>391</u>	<u>494</u>	24	<u>391</u>	<u>494</u>	391	494	394	491
429.mcf	24	<u>231</u>	<u>946</u>	231	948	232	945	24	<u>231</u>	<u>946</u>	231	948	232	945
445.gobmk	24	<u>570</u>	<u>442</u>	570	442	580	434	24	555	454	556	453	<u>555</u>	<u>454</u>
456.hammer	24	<u>274</u>	<u>818</u>	273	819	275	816	24	243	921	<u>244</u>	<u>919</u>	245	915
458.sjeng	24	666	436	681	427	<u>679</u>	<u>428</u>	24	653	445	628	462	<u>631</u>	<u>460</u>
462.libquantum	24	126	3940	126	3940	<u>126</u>	<u>3940</u>	24	126	3940	126	3940	<u>126</u>	<u>3940</u>
464.h264ref	24	715	743	717	740	<u>715</u>	<u>743</u>	24	704	754	<u>705</u>	<u>754</u>	705	754
471.omnetpp	24	441	340	<u>444</u>	<u>338</u>	444	338	24	<u>416</u>	<u>361</u>	416	361	416	361
473.astar	24	<u>469</u>	<u>360</u>	469	360	468	360	24	<u>469</u>	<u>360</u>	469	360	468	360
483.xalancbmk	24	<u>240</u>	<u>690</u>	240	691	240	689	24	<u>240</u>	<u>690</u>	240	691	240	689

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Virtualization Technology disabled
Execute Disable disabled
Logical Processor enabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Fri Oct 4 10:46:47 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2643 v2 @ 3.50GHz
2 "physical id"s (chips)
24 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 637

PowerEdge M620 (Intel Xeon E5-2643 v2, 3.50 GHz)

SPECint_rate_base2006 = 611

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 2 3 4 8 9 10
physical 1: cores 2 3 4 8 9 10
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264469288 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 4 10:39
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4      225G  10G  204G   5% /
```

```
Additional information from dmidecode:
BIOS Dell Inc. 2.0.19 08/30/2013
Memory:
16x 00CE00B300CE M393B2G70DB0-CMA 16 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 637

PowerEdge M620 (Intel Xeon E5-2643 v2, 3.50 GHz)

SPECint_rate_base2006 = 611

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

General Notes (Continued)

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 637

PowerEdge M620 (Intel Xeon E5-2643 v2, 3.50 GHz)

SPECint_rate_base2006 = 611

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 637

PowerEdge M620 (Intel Xeon E5-2643 v2, 3.50 GHz)

SPECint_rate_base2006 = 611

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 19:26:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 November 2013.