



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 388**

PowerEdge M620 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate\_base2006 = 378**

CPU2006 license: 55


Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

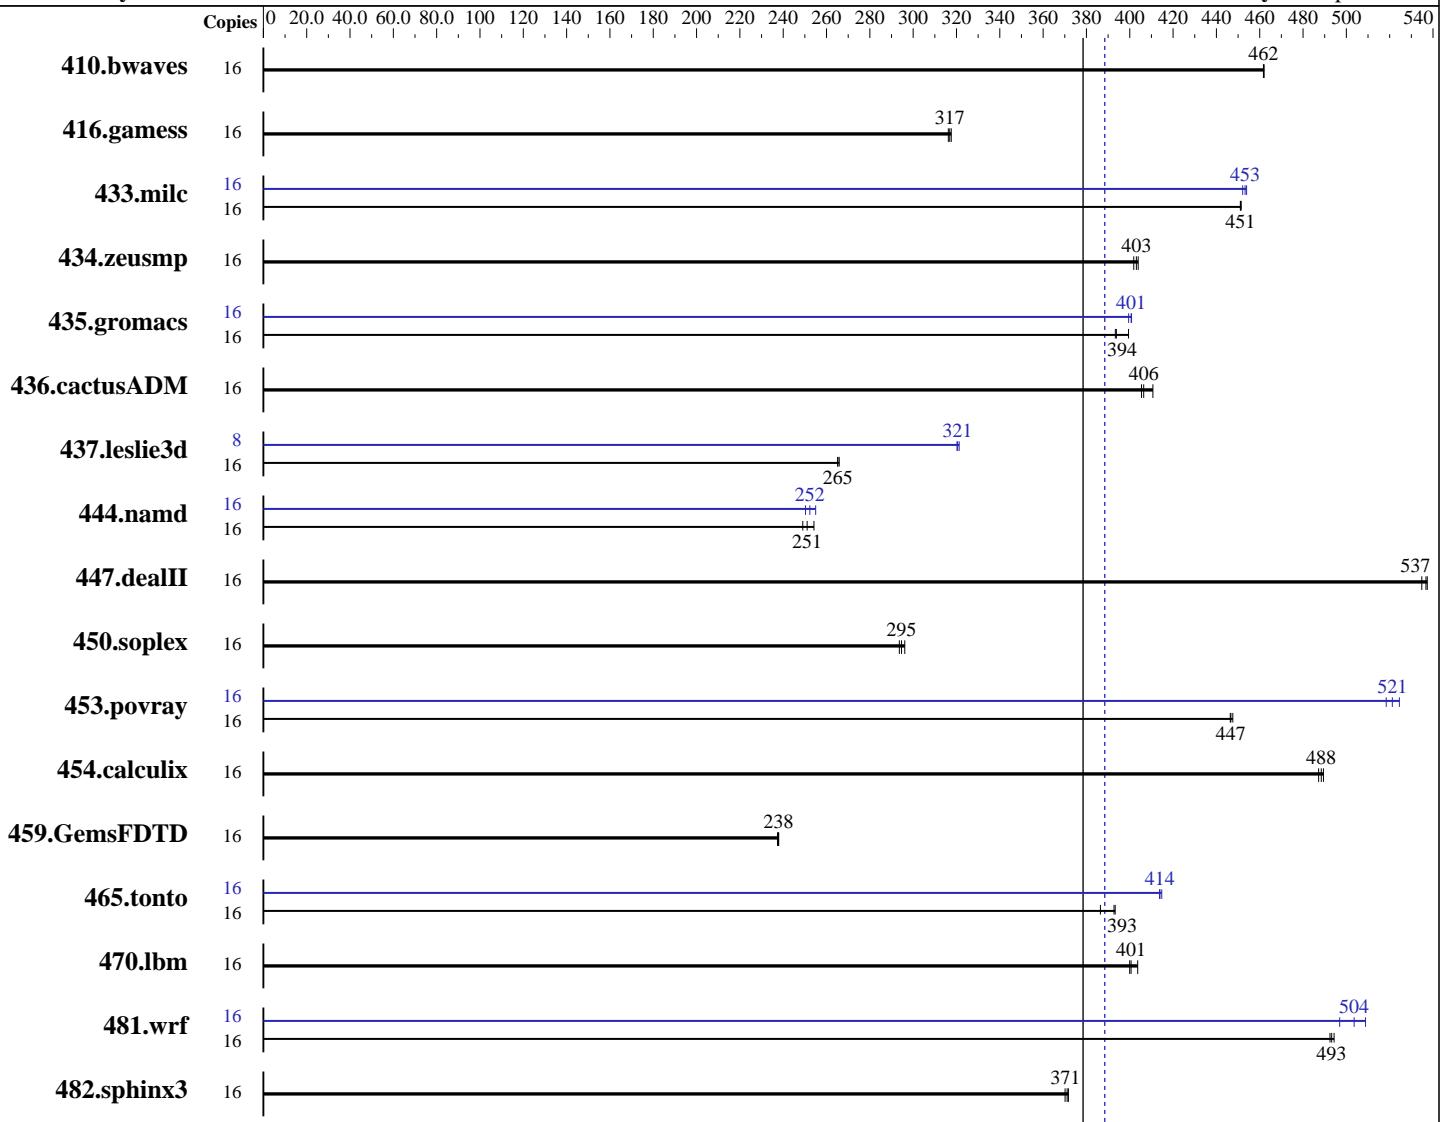

**SPECfp\_rate\_base2006 = 378**

**SPECfp\_rate2006 = 388**

## Hardware

CPU Name: Intel Xeon E5-2637 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
CPU MHz: 3500  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) 3.0.76-0.11-default  
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext2  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 388**

PowerEdge M620 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate\_base2006 = 378**

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 250 GB 7200 RPM SATA  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	471	462	471	462	<b>471</b>	<b>462</b>	16	471	462	471	462	<b>471</b>	<b>462</b>
416.gamess	16	991	316	<b>989</b>	<b>317</b>	986	318	16	991	316	<b>989</b>	<b>317</b>	986	318
433.milc	16	<b>326</b>	<b>451</b>	325	451	326	451	16	324	454	325	452	<b>324</b>	<b>453</b>
434.zeusmp	16	360	404	362	402	<b>361</b>	<b>403</b>	16	360	404	362	402	<b>361</b>	<b>403</b>
435.gromacs	16	<b>290</b>	<b>394</b>	286	399	290	393	16	285	401	<b>285</b>	<b>401</b>	286	399
436.cactusADM	16	<b>470</b>	<b>406</b>	466	411	472	405	16	<b>470</b>	<b>406</b>	466	411	472	405
437.leslie3d	16	566	266	567	265	<b>567</b>	<b>265</b>	8	235	320	234	321	<b>235</b>	<b>321</b>
444.namd	16	<b>511</b>	<b>251</b>	505	254	515	249	16	513	250	<b>509</b>	<b>252</b>	503	255
447.dealII	16	<b>341</b>	<b>537</b>	342	535	341	537	16	<b>341</b>	<b>537</b>	342	535	341	537
450.soplex	16	451	296	<b>453</b>	<b>295</b>	454	294	16	<b>451</b>	<b>296</b>	<b>453</b>	<b>295</b>	454	294
453.povray	16	191	446	190	448	<b>191</b>	<b>447</b>	16	164	518	162	524	<b>163</b>	<b>521</b>
454.calculix	16	270	489	271	487	<b>270</b>	<b>488</b>	16	270	489	271	487	<b>270</b>	<b>488</b>
459.GemsFDTD	16	713	238	<b>714</b>	<b>238</b>	715	237	16	713	238	<b>714</b>	<b>238</b>	715	237
465.tonto	16	<b>401</b>	<b>393</b>	407	386	400	393	16	380	415	<b>380</b>	<b>414</b>	381	414
470.lbm	16	550	400	<b>549</b>	<b>401</b>	545	404	16	550	400	<b>549</b>	<b>401</b>	545	404
481.wrf	16	363	492	362	494	<b>362</b>	<b>493</b>	16	351	509	<b>355</b>	<b>504</b>	360	497
482.sphinx3	16	839	372	<b>840</b>	<b>371</b>	843	370	16	839	372	<b>840</b>	<b>371</b>	843	370

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Virtualization Technology disabled  
 Execute Disable disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 388**

PowerEdge M620 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate\_base2006 = 378**

**CPU2006 license:** 55

**Test date:** Sep-2013

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2013

**Tested by:** Dell Inc.

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
Logical Processor enabled
System Profile set to Performance
Sysinfo program /root/cpu2006.1.2.ic13/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Thu Sep 12 07:00:31 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2637 v2 @ 3.50GHz
        2 "physical id"s (chips)
        16 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 1 2 3 4
        physical 1: cores 1 2 3 4
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:       264601764 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
    VERSION = 11
    PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 11 21:59 last=S
```

```
SPEC is set to: /root/cpu2006.1.2.ic13
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  221G   99G  122G  45%  /
```

Additional information from dmidecode:

BIOS Dell Inc. 2.0.15 07/30/2013

Memory:

16x 00CE00B300CE M393B2G70BH0-CMA 16 GB 1866 MHz

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 388**

**SPECfp\_rate\_base2006 = 378**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006.1.2.ic13/libs/32:/root/cpu2006.1.2.ic13/libs/64:/root/cpu2006.1.2.ic13/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 388**

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 388**

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -static -auto-ilp32
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
            -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: basepeak = yes
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
            -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
              -prof-use(pass 2) -opt-prefetch -static -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 388**

**SPECfp\_rate\_base2006 = 378**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:10:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 November 2013.