



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®2006 = 45.8

Express5800/R120e-2E (Intel Xeon E5-2430L v2)

SPECint_base2006 = 43.0

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

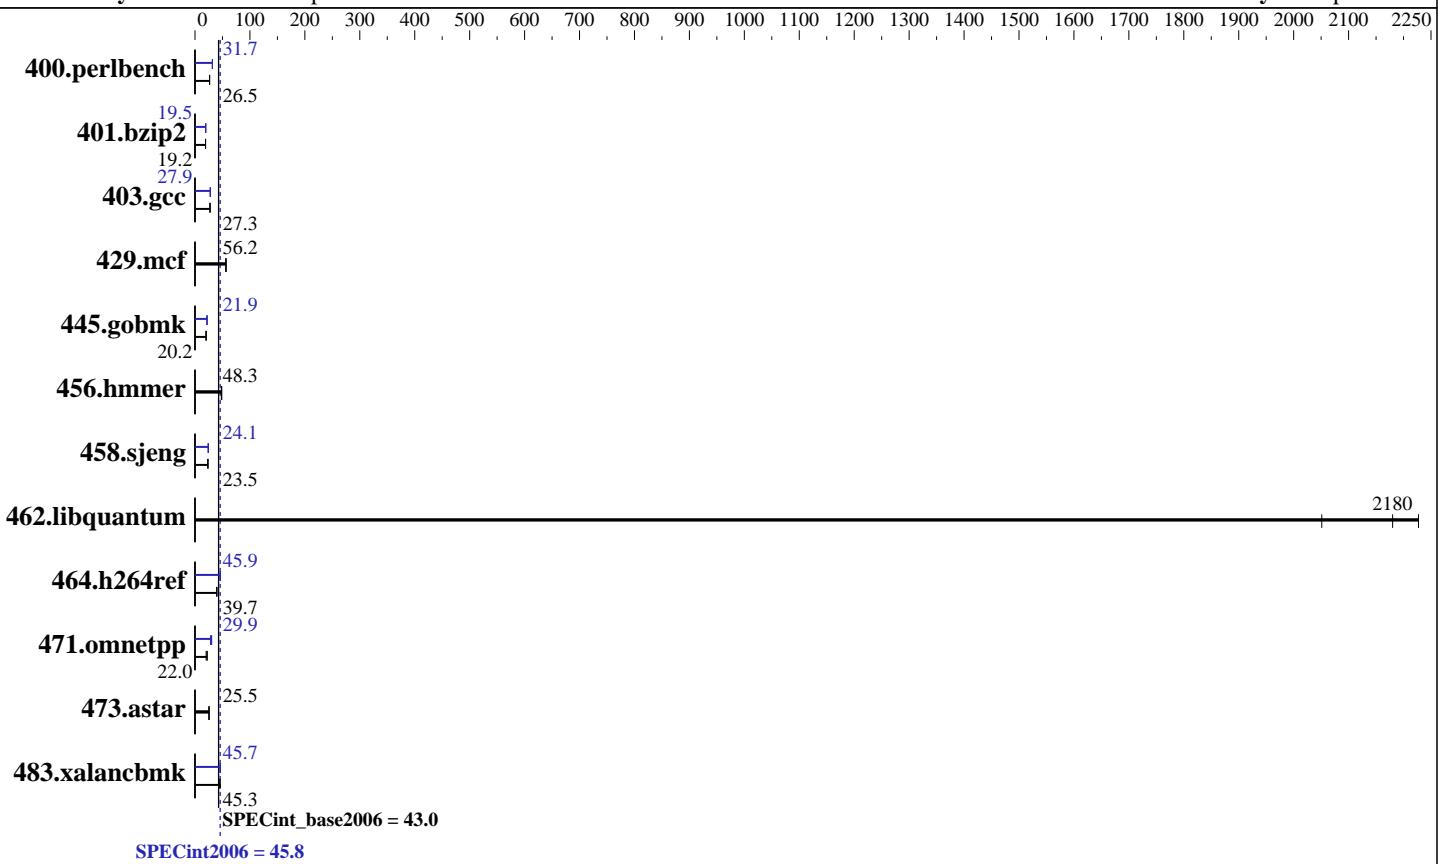

Hardware

CPU Name: Intel Xeon E5-2430L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Compiler: Kernel 2.6.32-358.18.1.el6.x86_64
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120e-2E (Intel Xeon E5-2430L v2)

SPECint2006 = 45.8

SPECint_base2006 = 43.0

CPU2006 license: 9006

Test date: Feb-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	368	26.6	368	26.5	368	26.5	308	31.7	308	31.7	308	31.7
401.bzip2	502	19.2	502	19.2	502	19.2	495	19.5	496	19.5	495	19.5
403.gcc	295	27.3	295	27.3	293	27.4	289	27.8	289	27.9	289	27.9
429.mcf	163	56.1	161	56.7	162	56.2	163	56.1	161	56.7	162	56.2
445.gobmk	521	20.1	520	20.2	520	20.2	480	21.9	479	21.9	480	21.9
456.hmmer	192	48.7	195	47.9	193	48.3	192	48.7	195	47.9	193	48.3
458.sjeng	515	23.5	515	23.5	515	23.5	501	24.2	501	24.1	501	24.1
462.libquantum	10.1	2050	9.50	2180	9.30	2230	10.1	2050	9.50	2180	9.30	2230
464.h264ref	558	39.6	558	39.7	558	39.7	483	45.8	483	45.9	483	45.9
471.omnetpp	284	22.0	308	20.3	283	22.1	221	28.3	206	30.4	209	29.9
473.astar	274	25.6	275	25.5	276	25.4	274	25.6	275	25.5	276	25.4
483.xalancbmk	152	45.5	152	45.3	152	45.3	151	45.7	151	45.7	150	45.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Energy Performance: Performance

Memory Voltage: 1.5 V

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "12"

The Express5800/R120e-1E and

the Express5800/R120e-2E models are electronically equivalent.

The results have been measured on the Express5800/R120e-2E model.

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120e-2E (Intel Xeon E5-2430L v2)

SPECint2006 = 45.8

SPECint_base2006 = 43.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120e-2E (Intel Xeon E5-2430L v2)

SPECint2006 = 45.8

SPECint_base2006 = 43.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch`
`-ansi-alias`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch`
`-ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias`

456.hammer: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120e-2E (Intel Xeon E5-2430L v2)

SPECint2006 = 45.8

SPECint_base2006 = 43.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:39:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 March 2014.