



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 65.9

ProLiant XL170r Gen9
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECint_base2006 = 62.8

CPU2006 license: 3


Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

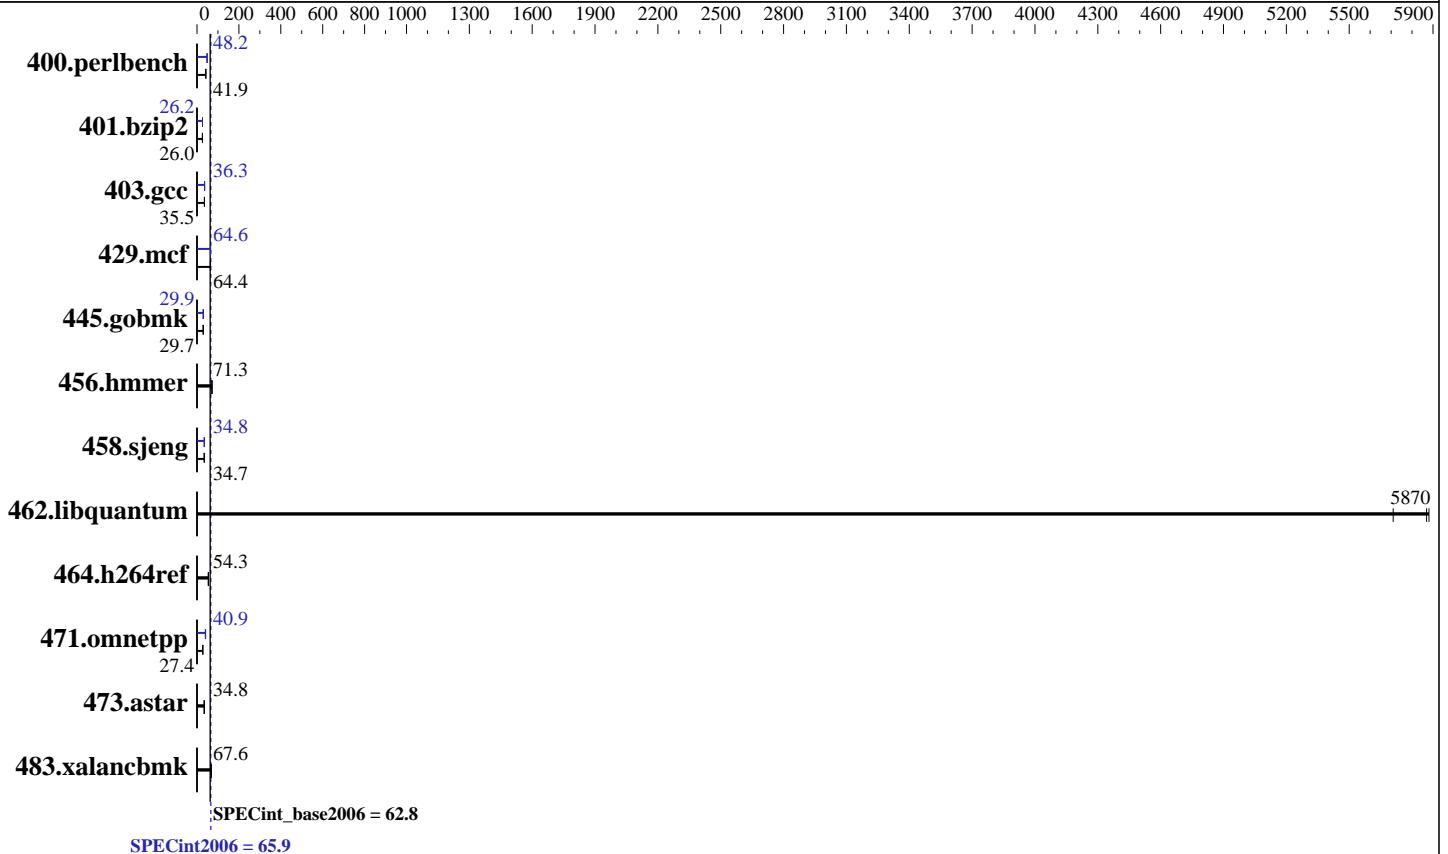

Hardware

CPU Name: Intel Xeon E5-2667 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 400 GB SATA SSD, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 Kernel 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = **65.9**

ProLiant XL170r Gen9
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECint_base2006 = **62.8**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2015
Hardware Availability: Mar-2015
Software Availability: Sep-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>233</u>	<u>41.9</u>	233	42.0	233	41.9	203	48.2	<u>203</u>	<u>48.2</u>	203	48.2
401.bzip2	<u>372</u>	<u>26.0</u>	372	25.9	371	26.0	368	26.2	368	26.2	<u>368</u>	<u>26.2</u>
403.gcc	<u>227</u>	<u>35.5</u>	226	35.6	227	35.5	223	36.1	222	36.3	<u>222</u>	<u>36.3</u>
429.mcf	143	63.9	<u>142</u>	<u>64.4</u>	141	64.7	<u>141</u>	<u>64.6</u>	142	64.1	141	64.8
445.gobmk	<u>353</u>	<u>29.7</u>	353	29.7	353	29.8	<u>351</u>	<u>29.9</u>	351	29.9	351	29.9
456.hammer	<u>131</u>	<u>71.3</u>	131	71.3	131	71.3	<u>131</u>	<u>71.3</u>	131	71.3	131	71.3
458.sjeng	349	34.7	349	34.6	<u>349</u>	<u>34.7</u>	348	34.8	<u>348</u>	<u>34.8</u>	348	34.8
462.libquantum	<u>3.53</u>	<u>5870</u>	3.52	5880	3.63	5710	<u>3.53</u>	<u>5870</u>	3.52	5880	3.63	5710
464.h264ref	<u>407</u>	<u>54.3</u>	408	54.3	407	54.3	<u>407</u>	<u>54.3</u>	408	54.3	407	54.3
471.omnetpp	228	27.4	<u>228</u>	<u>27.4</u>	225	27.8	158	39.5	152	41.1	<u>153</u>	<u>40.9</u>
473.astar	205	34.2	<u>202</u>	<u>34.8</u>	201	34.9	205	34.2	<u>202</u>	<u>34.8</u>	201	34.9
483.xalancbmk	<u>102</u>	<u>67.6</u>	102	67.5	102	67.9	<u>102</u>	<u>67.6</u>	102	67.5	102	67.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:
Intel Hyperthreading Options set to Disabled
HP Power Profile set to Custom
HP Power Regulator set to HP Static High Performance Mode
Minimum Processor Idle Power Package C-State set to No Package State
Energy/Performance Bias set to Maximum Performance
QPI Snoop Configuration set to Early Snoop
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh

Sysinfo program /cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on R110-xl170-A Mon Mar 30 17:41:27 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 65.9

ProLiant XL170r Gen9
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECint_base2006 = 62.8

CPU2006 license: 3

Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2667 v3 @ 3.20GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      263847148 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

```

uname -a:
Linux R110-xl170-A 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 30 17:40

```

SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   307G  166G  141G  55% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U14 03/05/2015
Memory:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 65.9

ProLiant XL170r Gen9
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECint_base2006 = 62.8

CPU2006 license: 3

Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

Platform Notes (Continued)

5x HP 752369-081 16 GB 2 rank 2133 MHz
11x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 65.9

ProLiant XL170r Gen9
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECint_base2006 = 62.8

CPU2006 license: 3

Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32

-opt-prefetch -ansi-alias

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 65.9

ProLiant XL170r Gen9
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECint_base2006 = 62.8

CPU2006 license: 3

Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmr: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant XL170r Gen9
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECint2006 = 65.9

SPECint_base2006 = 62.8

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2015

Hardware Availability: Mar-2015

Software Availability: Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 21 18:22:43 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 April 2015.