



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp[®]_rate2006 = 808

Lenovo ThinkServer SD350
(2.20 GHz, Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 788

CPU2006 license: 9017


Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

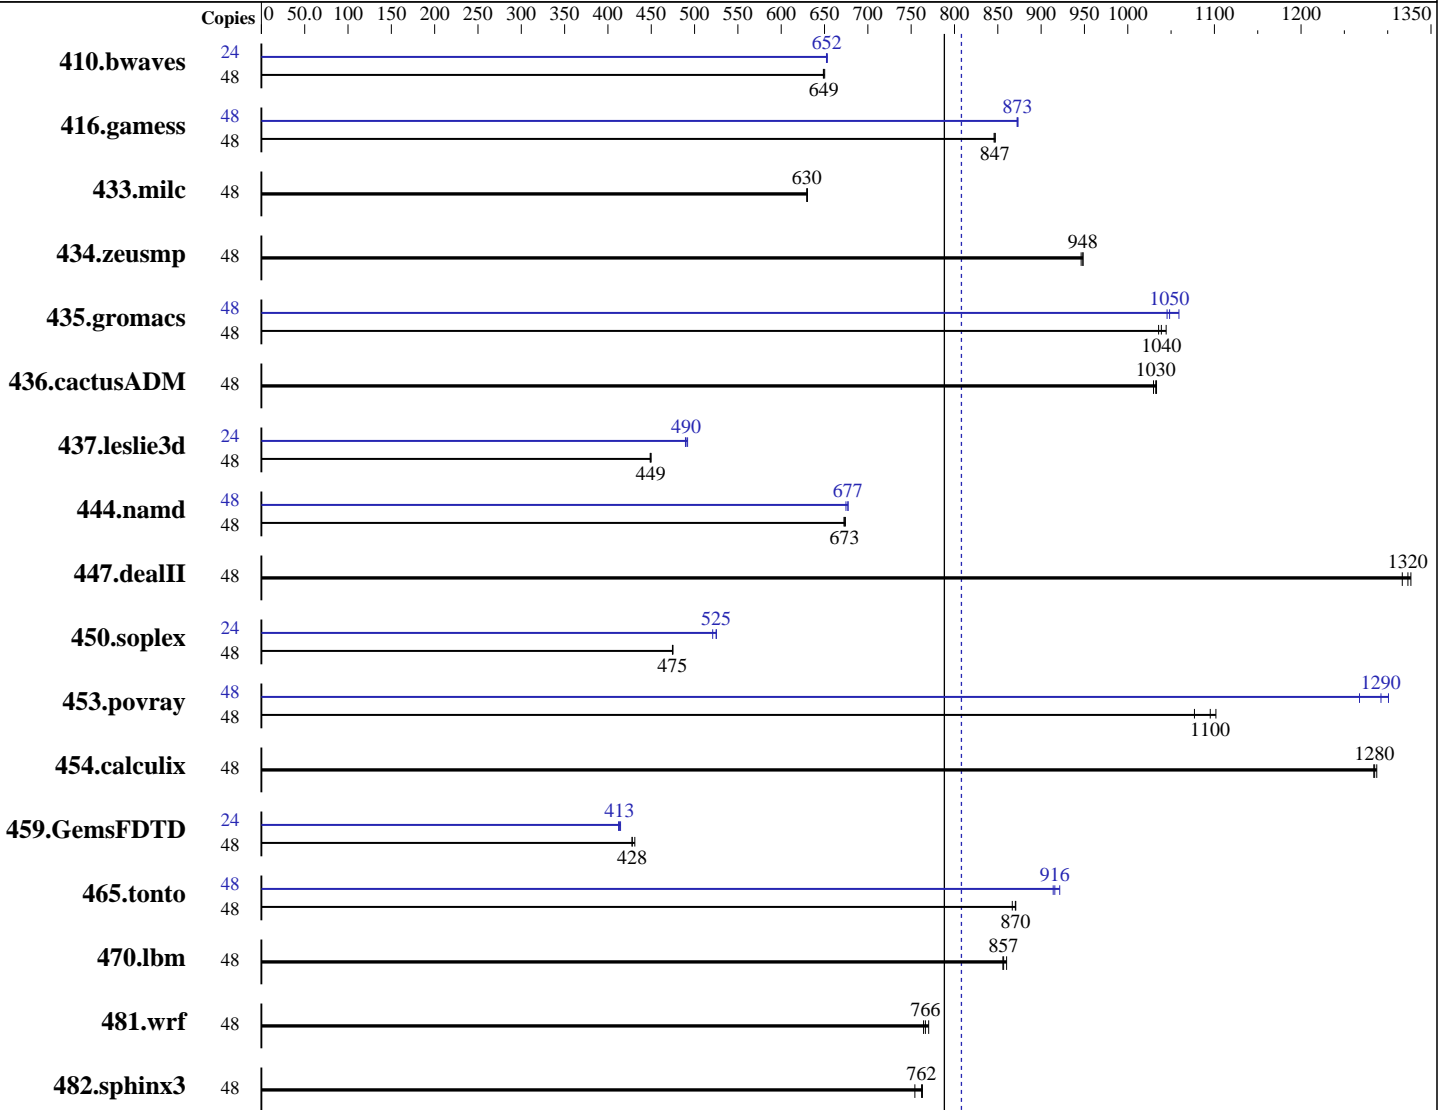

SPECfp_rate_base2006 = 788

SPECfp_rate2006 = 808

Hardware

CPU Name: Intel Xeon E5-2650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: btrfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = **808**

Lenovo ThinkServer SD350
(2.20 GHz, Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = **788**

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1006	649	1005	649	1003	650	24	499	653	500	652	500	652
416.gamess	48	1111	846	1110	847	1110	847	48	1077	872	1076	873	1077	873
433.milc	48	700	630	700	630	699	630	48	700	630	700	630	699	630
434.zeusmp	48	461	948	462	946	461	948	48	461	948	462	946	461	948
435.gromacs	48	328	1040	331	1040	330	1040	48	328	1050	327	1050	324	1060
436.cactusADM	48	555	1030	556	1030	557	1030	48	555	1030	556	1030	557	1030
437.leslie3d	48	1005	449	1004	449	1003	450	24	461	489	459	492	460	490
444.namd	48	571	674	572	673	572	672	48	569	677	569	677	571	675
447.dealII	48	414	1330	415	1320	417	1320	48	414	1330	415	1320	417	1320
450.soplex	48	844	475	843	475	844	474	24	381	525	384	521	381	525
453.povray	48	232	1100	237	1080	233	1100	48	196	1300	201	1270	198	1290
454.calculix	48	308	1280	308	1290	308	1280	48	308	1280	308	1290	308	1280
459.GemsFDTD	48	1190	428	1182	431	1190	428	24	614	415	618	412	616	413
465.tonto	48	545	867	542	871	543	870	48	516	916	513	921	517	914
470.lbm	48	771	856	770	857	767	860	48	771	856	770	857	767	860
481.wrf	48	696	770	702	764	700	766	48	696	770	702	764	700	766
482.sphinx3	48	1240	754	1226	763	1228	762	48	1240	754	1226	763	1228	762

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 808

Lenovo ThinkServer SD350
(2.20 GHz, Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 788

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Platform Notes

BIOS configuration:

DCU Streamer Prefetcher set to Disable

Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on SD350-Kent Thu Jan 14 05:11:28 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2650 v4@ 2.20GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

cache size : 30720 KB

From /proc/meminfo

MemTotal: 132185692 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 1

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION_ID="12.1"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux SD350-Kent 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015

(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 13 17:35

SPEC is set to: /home/cpu2006-1.2-ic17.0

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 808

Lenovo ThinkServer SD350
(2.20 GHz, Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 788

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/md126p2	btrfs	744G	46G	697G	7%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.57 08/12/2016

Memory:

8x NO DIMM NO DIMM

8x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 808

Lenovo ThinkServer SD350
(2.20 GHz, Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 788

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 808

Lenovo ThinkServer SD350
(2.20 GHz, Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 788

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -fno-alias -auto-ilp32
         -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
          -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -qopt-malloc-options=3
          -qopt-mem-layout-trans=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
          -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 808

Lenovo ThinkServer SD350
(2.20 GHz, Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 788

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

410.bwaves: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

416.gamess: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 7 17:00:30 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 February 2017.