



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECfp®2006 = 147

SPECfp\_base2006 = 140

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2017

Hardware Availability: Sep-2017

Software Availability: Nov-2016

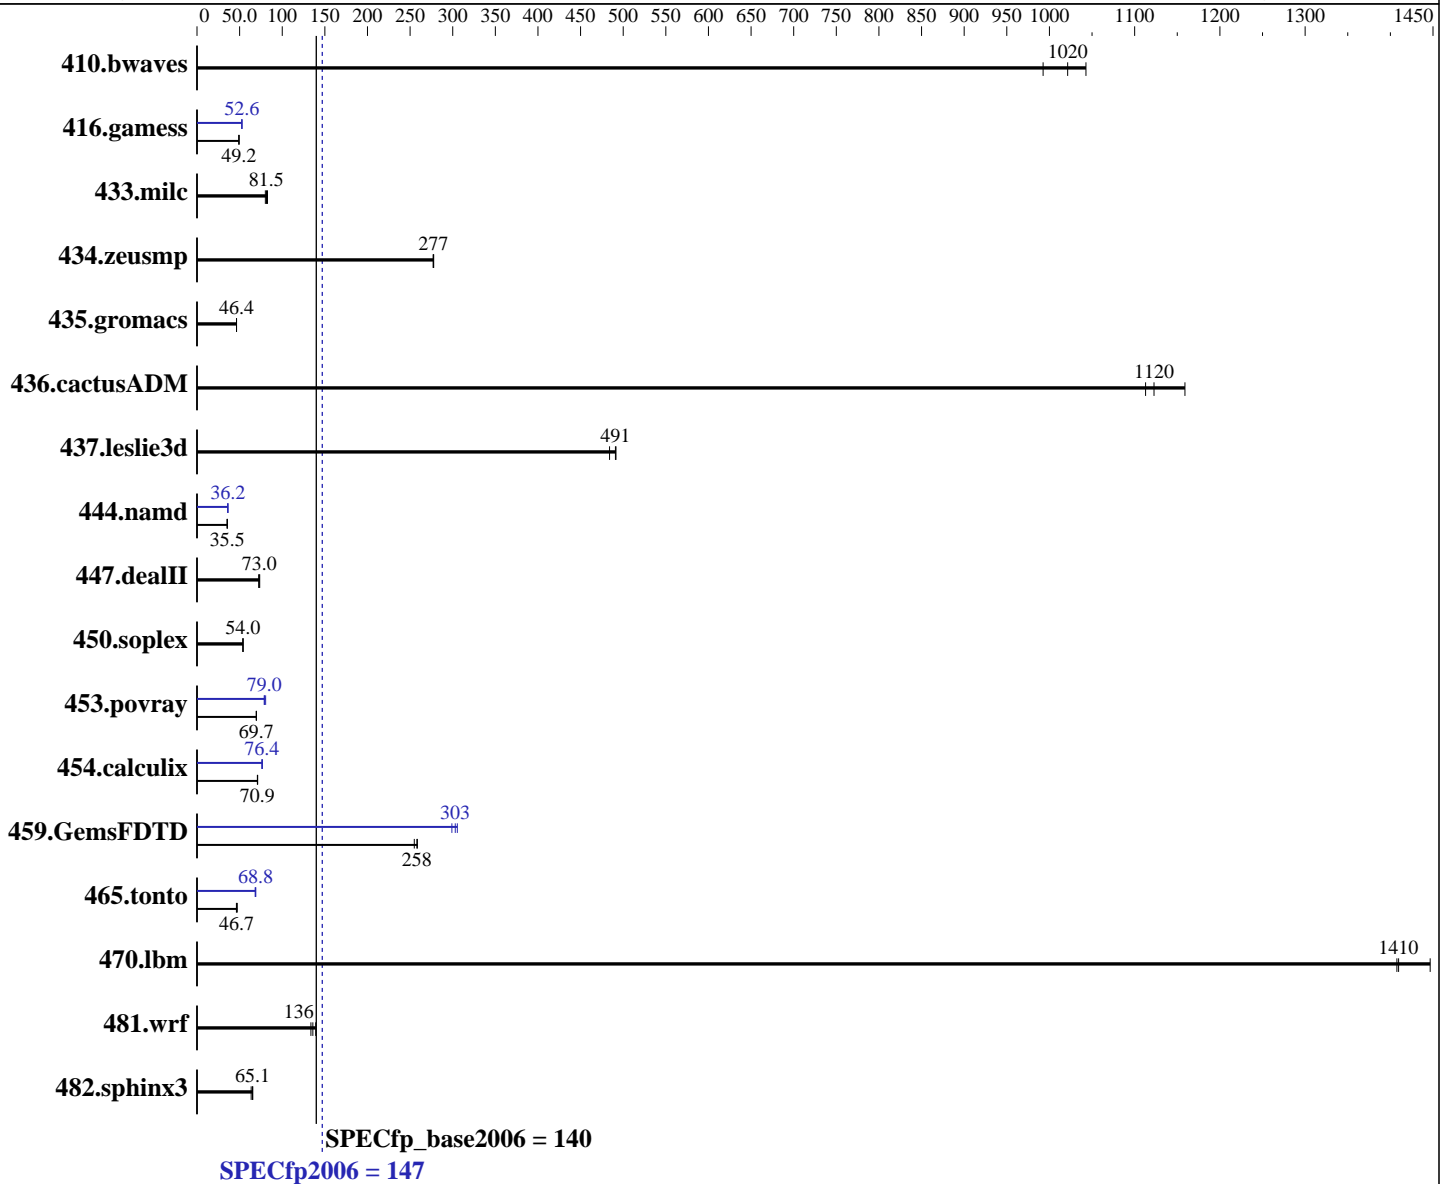

### Hardware

CPU Name: Intel Xeon Platinum 8170  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 52 cores, 2 chips, 26 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP3 (x86\_64) 4.4.70-2-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: btrfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECfp2006 = 147

SPECfp\_base2006 = 140

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2017

Hardware Availability: Sep-2017

Software Availability: Nov-2016

L3 Cache: 35.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 960 GB SATA SSD  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	13.7	993	13.0	1040	<b><u>13.3</u></b>	<b><u>1020</u></b>	13.7	993	13.0	1040	<b><u>13.3</u></b>	<b><u>1020</u></b>
416.gamess	<b><u>398</u></b>	<b><u>49.2</u></b>	398	49.2	398	49.2	<b><u>372</u></b>	<b><u>52.6</u></b>	372	52.6	371	52.7
433.milc	114	80.2	<b><u>113</u></b>	<b><u>81.5</u></b>	111	82.7	114	80.2	<b><u>113</u></b>	<b><u>81.5</u></b>	111	82.7
434.zeusmp	32.8	278	<b><u>32.8</u></b>	<b><u>277</u></b>	32.9	277	32.8	278	<b><u>32.8</u></b>	<b><u>277</u></b>	32.9	277
435.gromacs	<b><u>154</u></b>	<b><u>46.4</u></b>	154	46.4	154	46.3	<b><u>154</u></b>	<b><u>46.4</u></b>	154	46.4	154	46.3
436.cactusADM	10.7	1110	10.3	1160	<b><u>10.6</u></b>	<b><u>1120</u></b>	10.7	1110	10.3	1160	<b><u>10.6</u></b>	<b><u>1120</u></b>
437.leslie3d	19.4	484	19.1	492	<b><u>19.2</u></b>	<b><u>491</u></b>	19.4	484	19.1	492	<b><u>19.2</u></b>	<b><u>491</u></b>
444.namd	226	35.5	226	35.5	<b><u>226</u></b>	<b><u>35.5</u></b>	222	36.2	222	36.2	<b><u>222</u></b>	<b><u>36.2</u></b>
447.dealII	156	73.6	158	72.4	<b><u>157</u></b>	<b><u>73.0</u></b>	156	73.6	158	72.4	<b><u>157</u></b>	<b><u>73.0</u></b>
450.soplex	154	54.0	<b><u>154</u></b>	<b><u>54.0</u></b>	155	53.9	154	54.0	<b><u>154</u></b>	<b><u>54.0</u></b>	155	53.9
453.povray	76.6	69.5	76.3	69.7	<b><u>76.3</u></b>	<b><u>69.7</u></b>	67.4	79.0	66.1	80.5	<b><u>67.3</u></b>	<b><u>79.0</u></b>
454.calculix	116	71.2	<b><u>116</u></b>	<b><u>70.9</u></b>	116	70.8	108	76.7	108	76.2	<b><u>108</u></b>	<b><u>76.4</u></b>
459.GemsFDTD	41.0	259	41.6	255	<b><u>41.1</u></b>	<b><u>258</u></b>	<b><u>35.0</u></b>	<b><u>303</u></b>	35.5	299	34.7	305
465.tonto	213	46.2	209	47.2	<b><u>211</u></b>	<b><u>46.7</u></b>	<b><u>143</u></b>	<b><u>68.8</u></b>	144	68.2	143	68.8
470.lbm	9.76	1410	9.50	1450	<b><u>9.75</u></b>	<b><u>1410</u></b>	9.76	1410	9.50	1450	<b><u>9.75</u></b>	<b><u>1410</u></b>
481.wrf	80.2	139	83.6	134	<b><u>82.2</u></b>	<b><u>136</u></b>	80.2	139	83.6	134	<b><u>82.2</u></b>	<b><u>136</u></b>
482.sphinx3	307	63.5	298	65.4	<b><u>299</u></b>	<b><u>65.1</u></b>	307	63.5	298	65.4	<b><u>299</u></b>	<b><u>65.1</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Sub NUMA Cluster disabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Energy Efficient Turbo disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 147

PowerEdge M640 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECfp\_base2006 = 140

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

## Platform Notes (Continued)

Memory Patrol Scrub disabled  
 Logical Processor enabled  
 CPU Interconnect Bus Link Power Management disabled  
 PCI ASPM L1 Link Power Management disabled  
 Sysinfo program /root/cpu2006-1.2\_ic17u3/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on linux-ejwa Tue Sep 12 05:41:26 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
 2 "physical id"s (chips)
 104 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 26
  siblings  : 52
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
 26 27 28 29
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
 26 27 28 29
cache size : 36608 KB
```

From /proc/meminfo

```
MemTotal:      196682072 kB
HugePages_Total:      0
Hugepagesize:      2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-ejwa 4.4.70-2-default #1 SMP Wed Jun 7 15:12:06 UTC 2017
(4502c76) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 147**

PowerEdge M640 (Intel Xeon Platinum 8170, 2.10 GHz)

**SPECfp\_base2006 = 140**

**CPU2006 license:** 55

**Test date:** Sep-2017

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2017

**Tested by:** Dell Inc.

**Software Availability:** Nov-2016

## Platform Notes (Continued)

run-level 3 Sep 12 01:11

SPEC is set to: /root/cpu2006-1.2\_ic17u3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	btrfs	855G	11G	845G	2%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 08/10/2017

Memory:

9x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz

3x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz

4x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2\_ic17u3/lib/ia32:/root/cpu2006-1.2\_ic17u3/lib/intel64:/root/cpu2006-1.2\_ic17u3/sh10.2"

OMP\_NUM\_THREADS = "52"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M640 (Intel Xeon Platinum 8170, 2.10 GHz)

**SPECfp2006 = 147**

**SPECfp\_base2006 = 140**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Nov-2016

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

```

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

```

## Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M640 (Intel Xeon Platinum 8170, 2.10 GHz)

**SPECfp2006 = 147**

**SPECfp\_base2006 = 140**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Nov-2016

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M640 (Intel Xeon Platinum 8170, 2.10 GHz)

**SPECfp2006 = 147**

**SPECfp\_base2006 = 140**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Nov-2016

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:39:12 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 October 2017.