



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8160)

SPECfp[®]2006 = **Not Run**

SPECfp_base2006 = **142**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

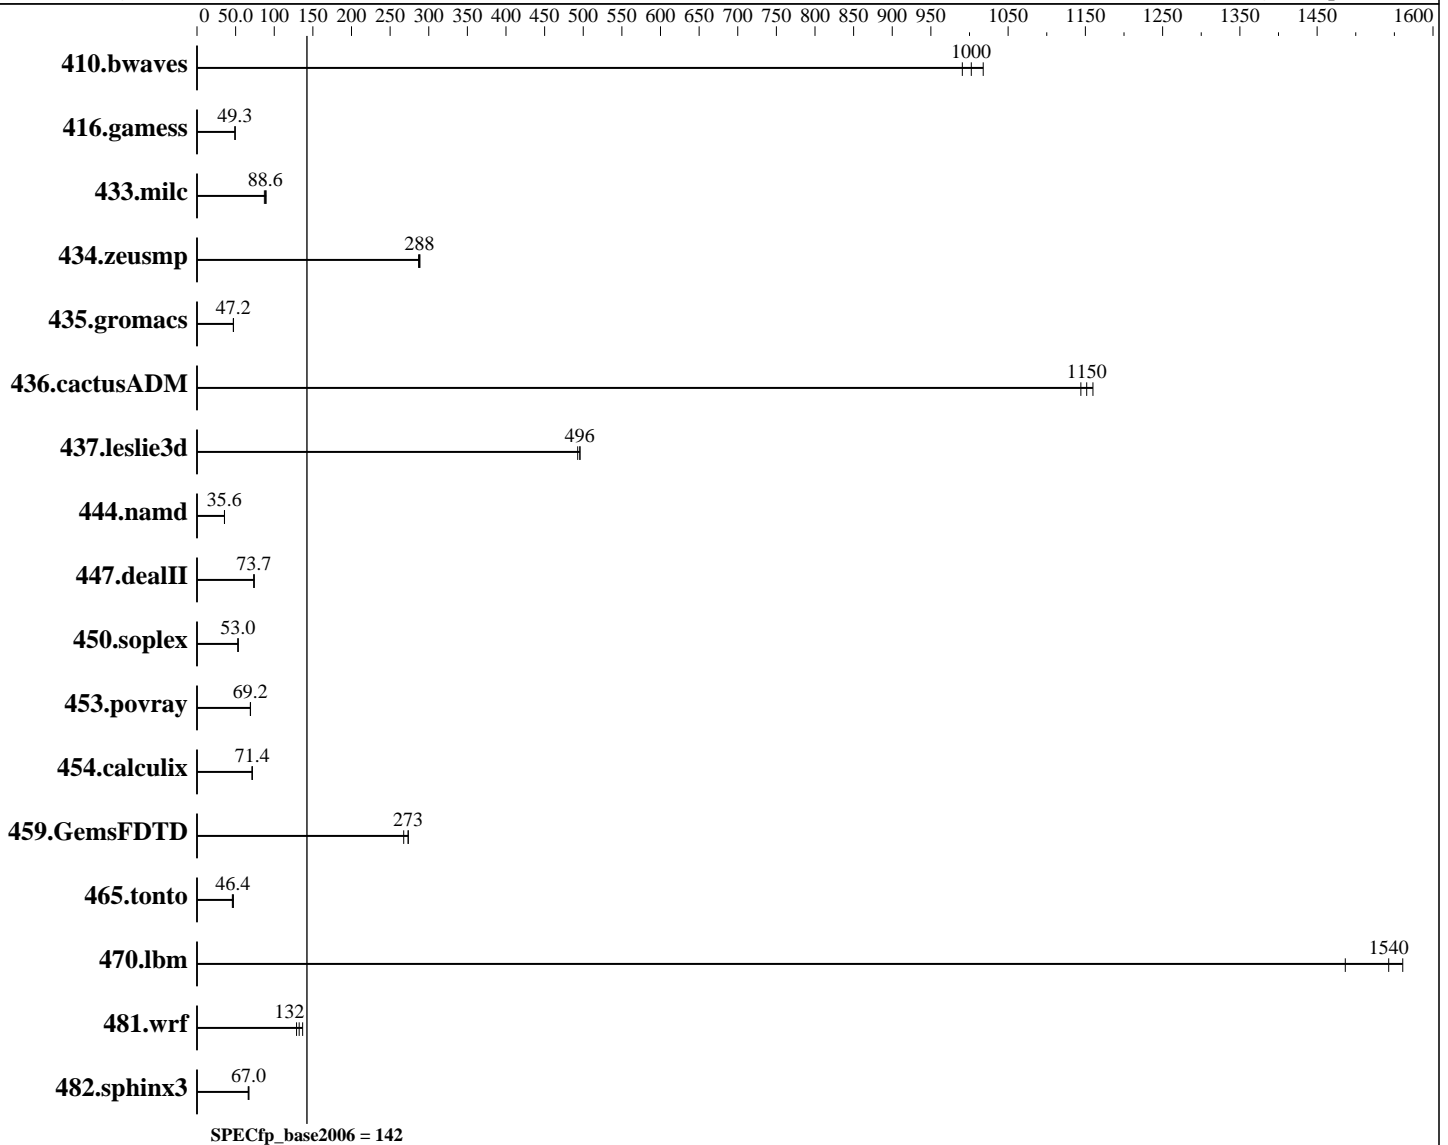

Hardware

CPU Name: Intel Xeon Platinum 8160
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 48 cores, 2 chips, 24 cores/chip
 CPU(s) orderable: 1, 2 chip(s)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo), Kernel 3.10.0-514.6.1.el7.x86_64
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8160)

SPECfp2006 = **Not Run**

SPECfp_base2006 = **142**

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

L3 Cache: 33 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 960 GB SATA SSD, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	13.7	991	13.4	1020	<u>13.6</u>	<u>1000</u>						
416.gamess	398	49.2	397	49.3	<u>397</u>	<u>49.3</u>						
433.milc	103	89.5	<u>104</u>	<u>88.6</u>	105	87.2						
434.zeusmp	31.7	287	31.5	289	<u>31.6</u>	<u>288</u>						
435.gromacs	152	47.1	151	47.3	<u>151</u>	<u>47.2</u>						
436.cactusADM	10.4	1140	10.3	1160	<u>10.4</u>	<u>1150</u>						
437.leslie3d	<u>19.0</u>	<u>496</u>	19.0	496	19.1	493						
444.namd	<u>226</u>	<u>35.6</u>	226	35.6	225	35.6						
447.dealII	156	73.5	154	74.1	<u>155</u>	<u>73.7</u>						
450.soplex	156	53.4	157	53.0	<u>157</u>	<u>53.0</u>						
453.povray	76.8	69.3	<u>76.9</u>	<u>69.2</u>	77.0	69.1						
454.calculix	115	71.6	<u>115</u>	<u>71.4</u>	116	71.4						
459.GemsFDTD	<u>38.8</u>	<u>273</u>	38.8	274	39.7	268						
465.tonto	<u>212</u>	<u>46.4</u>	215	45.8	209	47.1						
470.lbm	<u>8.91</u>	<u>1540</u>	9.24	1490	8.80	1560						
481.wrf	81.7	137	86.7	129	<u>84.4</u>	<u>132</u>						
482.sphinx3	294	66.3	<u>291</u>	<u>67.0</u>	290	67.1						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set with "tuned-adm profile throughput-performance"

Platform Notes

BIOS Configuration:
Intel Hyperthreading set to Disabled
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Prefetcher set to Enabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8160)

SPECfp2006 =

Not Run

SPECfp_base2006 =

142

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

LLC Dead Line Allocation set to Disabled
Workload Pofile set to General Peak Frequency Compute
Energy/Performance Bias set to Maximum Performance
Uncore Frequency Scaling set to Auto
Workload Pofile set to Custom
NUMA Group Size Optimization set to Flat

Sysinfo program /cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on s1-DL380-RHEL73U Fri Oct 6 12:29:46 2017

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHZ
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 24
  siblings  : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
cache size : 33792 KB
```

```
From /proc/meminfo
MemTotal:      197570088 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux s1-DL380-RHEL73U 3.10.0-514.6.1.el7.x86_64 #1 SMP Sat Dec 10 11:15:38
EST 2016 x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8160)

SPECfp2006 =

Not Run

SPECfp_base2006 =

142

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

run-level 3 Oct 6 09:45

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb4	xfs	889G	28G	862G	4%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=core,compact"

LD_LIBRARY_PATH = "/cpu2006/lib/ia32:/cpu2006/lib/intel64:/cpu2006/sh10.2"

OMP_NUM_THREADS = "48"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8160)

SPECfp2006 =

Not Run

SPECfp_base2006 =

142

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Base Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8160)

SPECfp2006 = Not Run

SPECfp_base2006 = 142

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 1 00:54:27 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 October 2017.