



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 8.98

PowerEdge R640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed2017_int_peak = 9.13

CPU2017 License: 55


Test Date: May-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

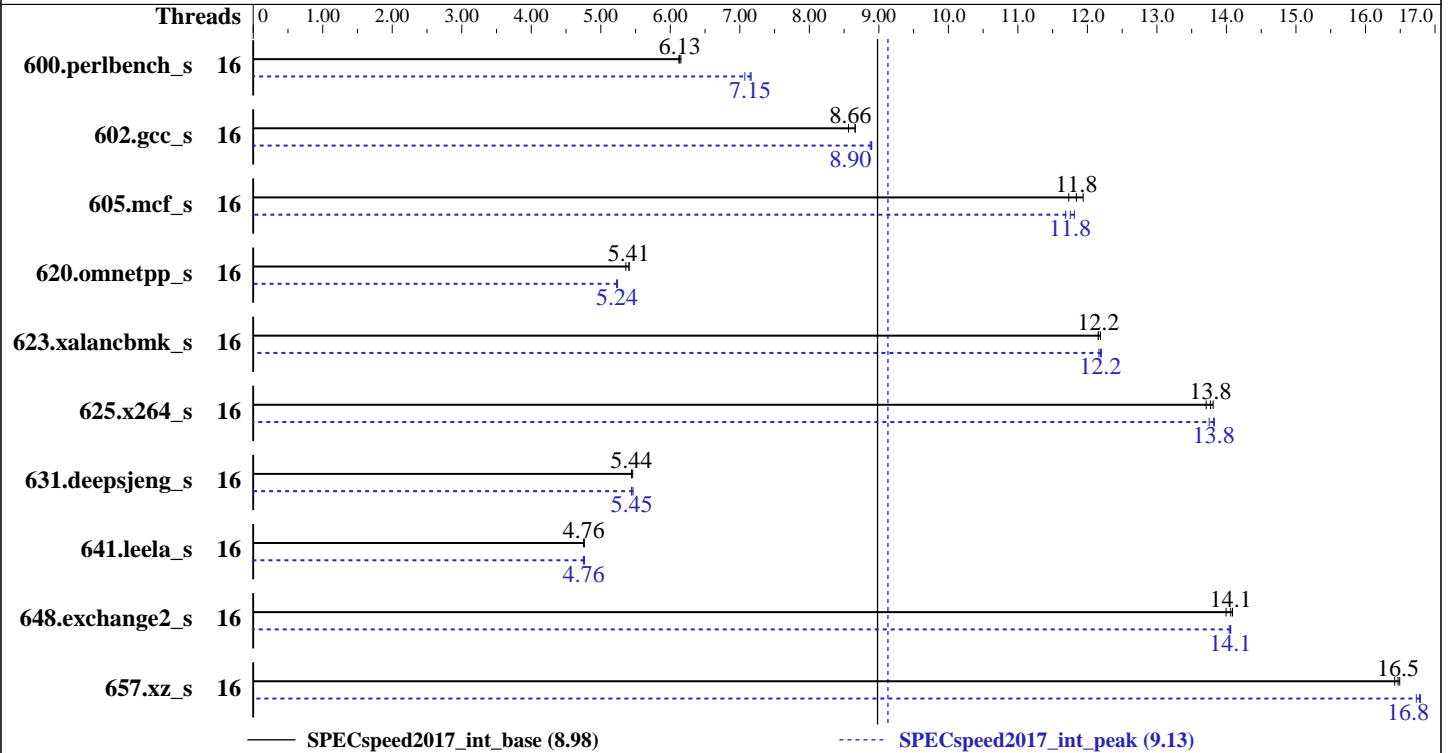

Hardware

CPU Name: Intel Xeon Gold 5222
 Max MHz.: 3900
 Nominal: 3800
 Enabled: 8 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Ubuntu 18.04.2 LTS
 kernel 4.15.0-45-generic
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler Build 20181018 for Linux
 Parallel: Yes
 Firmware: Version 2.1.8 released Apr-2019
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed2017_int_base = 8.98

PowerEdge R640 (Intel Xeon Gold 5222, 3.80GHz)

SPECSpeed2017_int_peak = 9.13

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	290	6.12	<u>289</u>	<u>6.13</u>	288	6.15	16	<u>248</u>	<u>7.15</u>	251	7.07	248	7.16
602.gcc_s	16	<u>460</u>	<u>8.66</u>	460	8.66	465	8.56	16	449	8.88	<u>448</u>	<u>8.90</u>	448	8.90
605.mcf_s	16	402	11.7	<u>399</u>	<u>11.8</u>	395	11.9	16	404	11.7	400	11.8	<u>402</u>	<u>11.8</u>
620.omnetpp_s	16	<u>302</u>	<u>5.41</u>	302	5.41	304	5.36	16	312	5.23	311	5.24	<u>311</u>	<u>5.24</u>
623.xalancbmk_s	16	116	12.2	117	12.2	<u>117</u>	<u>12.2</u>	16	116	12.2	116	12.2	<u>116</u>	<u>12.2</u>
625.x264_s	16	129	13.7	<u>128</u>	<u>13.8</u>	128	13.8	16	128	13.8	<u>128</u>	<u>13.8</u>	128	13.8
631.deepsjeng_s	16	263	5.44	263	5.46	<u>263</u>	<u>5.44</u>	16	263	5.44	262	5.46	<u>263</u>	<u>5.45</u>
641.leela_s	16	<u>359</u>	<u>4.76</u>	358	4.76	359	4.75	16	359	4.75	358	4.76	<u>359</u>	<u>4.76</u>
648.exchange2_s	16	209	14.1	210	14.0	<u>209</u>	<u>14.1</u>	16	<u>209</u>	<u>14.1</u>	209	14.0	209	14.1
657.xz_s	16	<u>375</u>	<u>16.5</u>	375	16.5	376	16.4	16	<u>368</u>	<u>16.8</u>	368	16.8	369	16.7

SPECSpeed2017_int_base = **8.98**

SPECSpeed2017_int_peak = **9.13**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 8.98

PowerEdge R640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed2017_int_peak = 9.13

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes

BIOS settings:

```

ADDDC setting disabled
Sub NUMA Cluster disabled
Virtualization Technology disabled
DCU Streamer Prefetcher disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
ClE disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on intel-sut Fri May 24 16:46:28 2019

```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 5 8 9 13
  physical 1: cores 5 8 9 12

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:  0-15
Thread(s) per core:    2
Core(s) per socket:    4
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                85

```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 8.98

PowerEdge R640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed2017_int_peak = 9.13

CPU2017 License: 55

Test Date: May-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz
Stepping: 6
CPU MHz: 1811.719
BogoMIPS: 7600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0,6,8,14
NUMA node1 CPU(s): 1,3,9,11
NUMA node2 CPU(s): 2,4,10,12
NUMA node3 CPU(s): 5,7,13,15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx
smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku
ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 6 8 14
node 0 size: 46786 MB
node 0 free: 46648 MB
node 1 cpus: 1 3 9 11
node 1 size: 48361 MB
node 1 free: 48215 MB
node 2 cpus: 2 4 10 12
node 2 size: 48383 MB
node 2 free: 48181 MB
node 3 cpus: 5 7 13 15
node 3 size: 48383 MB
node 3 free: 48076 MB
node distances:
node  0  1  2  3
0:  10  21  11  21
1:  21  10  21  11

```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 8.98

PowerEdge R640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed2017_int_peak = 9.13

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```
2: 11 21 10 21
3: 21 11 21 10
```

```
From /proc/meminfo
MemTotal:      196520392 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

```
run-level 5 May 24 16:29
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  439G   19G  398G   5% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 2.1.8 04/30/2019
Memory:
1x 002C0632002C 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933
7x 002C069D002C 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 8.98

PowerEdge R640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed2017_int_peak = 9.13

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

4x 00AD069D00AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
12x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
peak) 657.xz_s(base)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base,
peak) 641.leela_s(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 648.exchange2_s(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 8.98

PowerEdge R640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed2017_int_peak = 9.13

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 8.98

PowerEdge R640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed2017_int_peak = 9.13

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 8.98

PowerEdge R640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed2017_int_peak = 9.13

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Optimization Flags (Continued)

625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

623.xalancbmk_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

631.deepsjeng_s: Same as 623.xalancbmk_s

641.leela_s: Same as 623.xalancbmk_s

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-24 12:46:27-0400.

Report generated on 2019-06-11 17:14:58 by CPU2017 PDF formatter v6067.

Originally published on 2019-06-11.