



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.60 GHz, Intel Xeon Gold 6240M)

SPECspeed®2017\_fp\_base = 138

SPECspeed®2017\_fp\_peak = 138

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

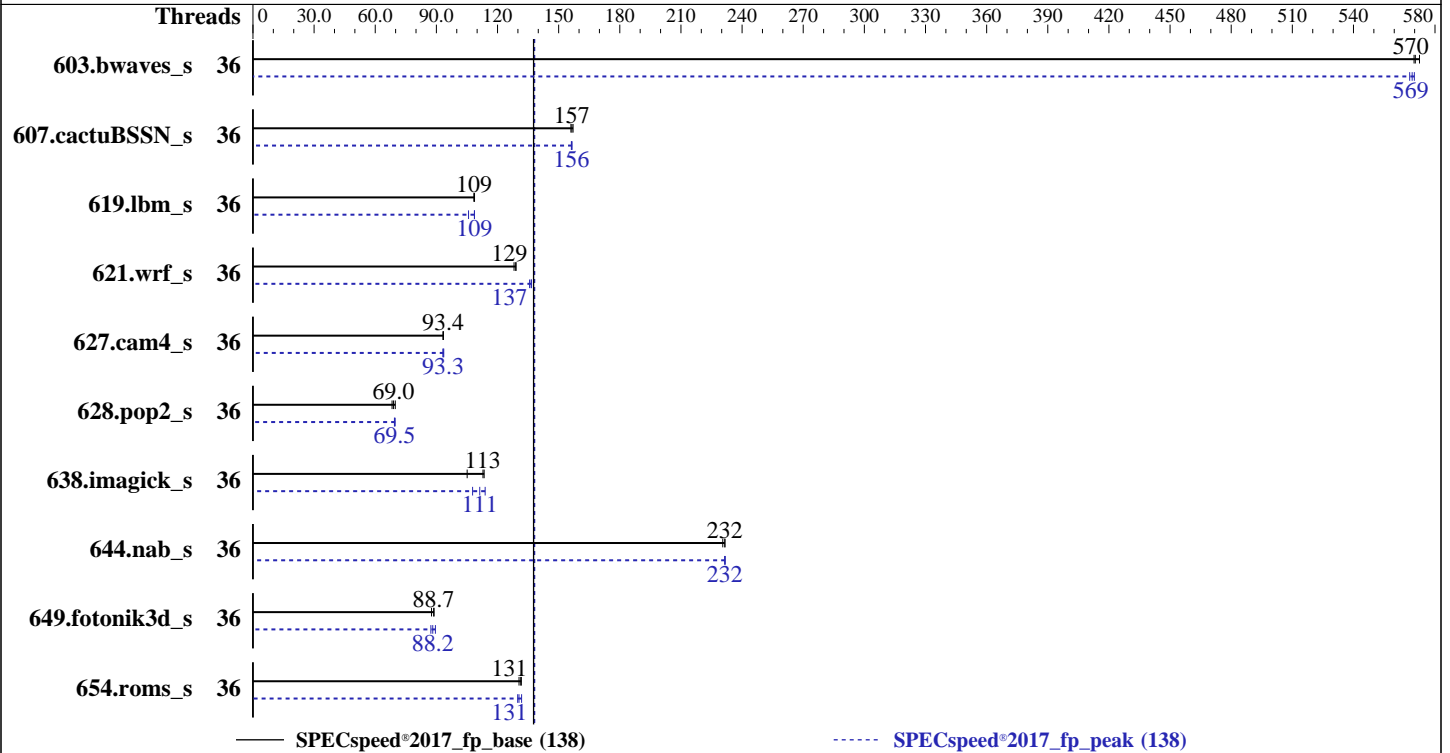

### Hardware

CPU Name: Intel Xeon Gold 6240M  
 Max MHz: 3900  
 Nominal: 2600  
 Enabled: 36 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 1 TB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
 Kernel 4.12.14-23-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: Yes  
 Firmware: Version 5102 released Feb-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.60 GHz, Intel Xeon Gold 6240M)

SPECSpeed®2017\_fp\_base = 138

SPECSpeed®2017\_fp\_peak = 138

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	36	<b>103</b>	<b>570</b>	104	570	103	572	36	104	570	<b>104</b>	<b>569</b>	104	568
607.cactuBSSN_s	36	107	156	<b>107</b>	<b>157</b>	106	157	36	<b>107</b>	<b>156</b>	106	157	107	156
619.lbm_s	36	48.3	108	<b>48.3</b>	<b>109</b>	48.2	109	36	49.5	106	48.2	109	<b>48.2</b>	<b>109</b>
621.wrf_s	36	102	129	<b>103</b>	<b>129</b>	103	128	36	96.8	137	97.4	136	<b>96.9</b>	<b>137</b>
627.cam4_s	36	95.0	93.3	94.9	93.4	<b>94.9</b>	<b>93.4</b>	36	94.7	93.6	95.0	93.3	<b>95.0</b>	<b>93.3</b>
628.pop2_s	36	174	68.3	170	69.8	<b>172</b>	<b>69.0</b>	36	171	69.4	170	69.8	<b>171</b>	<b>69.5</b>
638.imagick_s	36	127	113	<b>128</b>	<b>113</b>	137	105	36	134	108	<b>130</b>	<b>111</b>	127	114
644.nab_s	36	75.8	231	75.5	232	<b>75.5</b>	<b>232</b>	36	75.4	232	75.5	231	<b>75.4</b>	<b>232</b>
649.fotonik3d_s	36	103	88.9	104	87.6	<b>103</b>	<b>88.7</b>	36	102	89.5	<b>103</b>	<b>88.2</b>	104	87.3
654.roms_s	36	120	132	<b>120</b>	<b>131</b>	121	131	36	119	132	121	130	<b>121</b>	<b>131</b>

SPECSpeed®2017\_fp\_base = **138**

SPECSpeed®2017\_fp\_peak = **138**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec2017\_19u4/lib/intel64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

HyperThreading = Disabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.60 GHz, Intel Xeon Gold 6240M)

SPECspeed®2017\_fp\_base = 138

SPECspeed®2017\_fp\_peak = 138

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

### Platform Notes (Continued)

```

ENERGY_PERF_BIAS_CFG mode = performance
CSM Support = Disabled
Engine Boost = Level3(Max)
Enforce POR = Disable
Memory Frequency = 2933
LLC dead line allc = Disabled
SR-IOV Support = Disabled
Sysinfo program /spec2017_19u4/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-gh78 Fri Sep 6 00:29:33 2019

```

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6240M CPU @ 2.60GHz
 2 "physical id"s (chips)
 36 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18
siblings  : 18
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

```

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 36
On-line CPU(s) list:   0-35
Thread(s) per core:    1
Core(s) per socket:    18
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6240M CPU @ 2.60GHz
Stepping:               7
CPU MHz:                2600.000
CPU max MHz:            3900.0000
CPU min MHz:            1000.0000
BogoMIPS:               5200.00
Virtualization:         VT-x
L1d cache:              32K

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.60 GHz, Intel Xeon Gold 6240M)

SPECspeed®2017\_fp\_base = 138

SPECspeed®2017\_fp\_peak = 138

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

### Platform Notes (Continued)

```

L1i cache:          32K
L2 cache:           1024K
L3 cache:           25344K
NUMA node0 CPU(s): 0-17
NUMA node1 CPU(s): 18-35
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single mba tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local ibpb ibrs stibp
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
arch_capabilities ssbd

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
node 0 size: 385578 MB
node 0 free: 383657 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35
node 1 size: 386993 MB
node 1 free: 386452 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

```

From /proc/meminfo
MemTotal:      791113520 kB
HugePages_Total:      0
Hugepagesize:   2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.60 GHz, Intel Xeon Gold 6240M)

SPECspeed®2017\_fp\_base = 138

SPECspeed®2017\_fp\_peak = 138

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

### Platform Notes (Continued)

```
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux linux-gh78 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

```
run-level 3 Sep 5 17:04
```

SPEC is set to: /spec2017\_19u4

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   929G  16G  914G   2% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 5102 02/11/2019

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)  
  | 644.nab_s(base, peak)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++, C, Fortran | 607.cactuBSSN_s(base, peak)  
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.60 GHz, Intel Xeon Gold 6240M)

SPECspeed®2017\_fp\_base = 138

SPECspeed®2017\_fp\_peak = 138

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Sep-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

### Compiler Version Notes (Continued)

```

Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

### Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.60 GHz, Intel Xeon Gold 6240M)

SPECspeed®2017\_fp\_base = 138

SPECspeed®2017\_fp\_peak = 138

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Sep-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.60 GHz, Intel Xeon Gold 6240M)

SPECSpeed®2017\_fp\_base = 138

SPECSpeed®2017\_fp\_peak = 138

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Sep-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

649.fotonik3d\_s: Same as 603.bwaves\_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2\_s: Same as 621.wrf\_s

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.60 GHz, Intel Xeon Gold 6240M)

SPECspeed®2017\_fp\_base = 138

SPECspeed®2017\_fp\_peak = 138

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Sep-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revE.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revE.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-05 12:29:33-0400.

Report generated on 2021-01-04 16:46:14 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.