



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8268,
2.90GHz

SPECrate®2017_int_base = 586

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

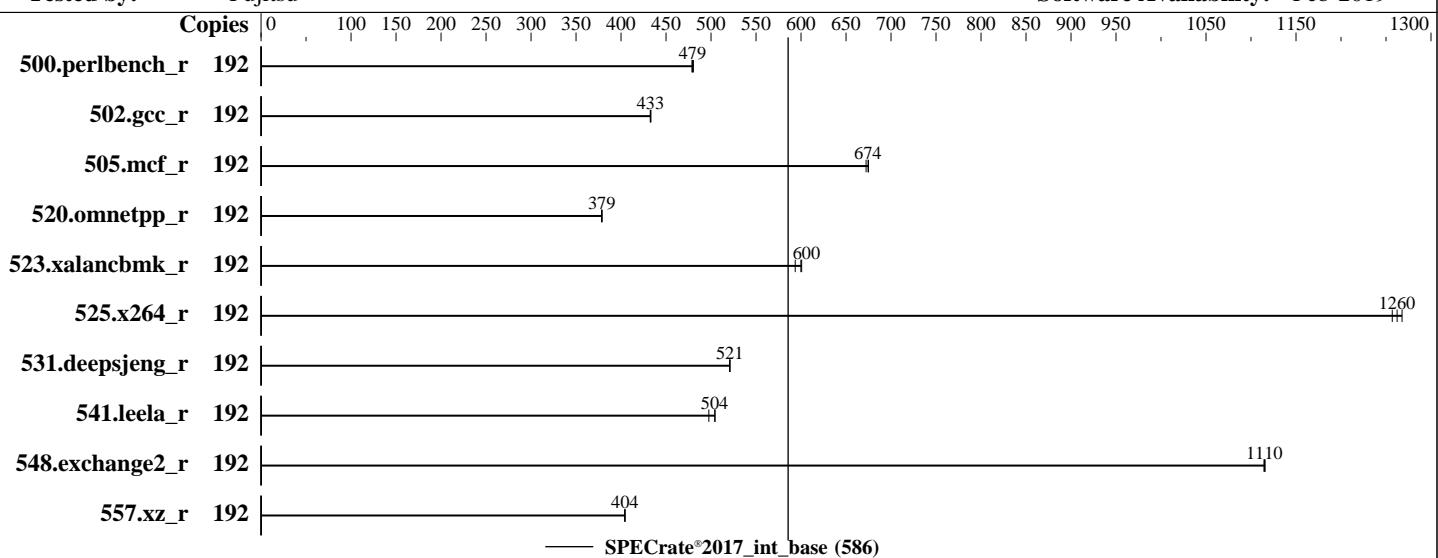

Hardware

CPU Name: Intel Xeon Platinum 8268
Max MHz: 3900
Nominal: 2900
Enabled: 96 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 35.75 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x SATA M.2 SSD, 480 GB
Other: None

Software

OS: SUSE Linux Enterprise Server 15
4.12.14-25.28-default
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
Compiler for Linux;
Fortran: Version 19.0.1.144 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Fujitsu BIOS Version V5.0.0.14 R1.8.0 for D3753-C1x. Released Jun-2019
tested as V5.0.0.14 R1.3.0 for D3753-C1x Mar-2019
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: --



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8268,
2.90GHz

SPECrate®2017_int_base = 586

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	636	480	638	479	638	479									
502.gcc_r	192	629	432	628	433	628	433									
505.mcf_r	192	460	675	460	674	462	672									
520.omnetpp_r	192	665	379	666	378	665	379									
523.xalancbmk_r	192	338	601	342	594	338	600									
525.x264_r	192	265	1270	266	1260	267	1260									
531.deepsjeng_r	192	422	521	422	521	422	521									
541.leela_r	192	630	505	639	498	631	504									
548.exchange2_r	192	451	1110	451	1110	451	1120									
557.xz_r	192	513	404	513	404	513	404									

SPECrate®2017_int_base = 586

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Kernel Boot Parameter set with : nohz_full=1-191

Process tuning settings:

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
```

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-int/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8268,
2.90GHz

SPECrate®2017_int_base = 586

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

Fan Control = Full

Energy Performance = Performance

HWPm = Native Mode with no legacy

LLC Prefetcher = Disable

Override OS Energy Performance = Enable

Patrol Scrub = Disabled

WR CRC feature Control = Disabled

XPT Prefetch = Enable

Sysinfo program /home/Benchmark/speccpu2017-int/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on RX4770M5 Thu May 30 07:01:37 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
        4 "physical id"s (chips)
        192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 22 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               192
On-line CPU(s) list: 0-191
Thread(s) per core:  2
Core(s) per socket:  24
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8268,
2.90GHz

SPECrate®2017_int_base = 586

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: May-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

```

Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
Stepping: 6
CPU MHz: 2900.000
CPU max MHz: 3900.0000
CPU min MHz: 1200.0000
BogoMIPS: 5800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,19,20,96-99,103-105,109-111,115,116
NUMA node1 CPU(s): 4-6,10-12,16-18,21-23,100-102,106-108,112-114,117-119
NUMA node2 CPU(s): 24-27,31,32,36-38,42-44,120-123,127,128,132-134,138-140
NUMA node3 CPU(s): 28-30,33-35,39-41,45-47,124-126,129-131,135-137,141-143
NUMA node4 CPU(s): 48-51,55,56,60-62,66-68,144-147,151,152,156-158,162-164
NUMA node5 CPU(s): 52-54,57-59,63-65,69-71,148-150,153-155,159-161,165-167
NUMA node6 CPU(s): 72-75,79,80,84-86,90-92,168-171,175,176,180-182,186-188
NUMA node7 CPU(s): 76-78,81-83,87-89,93-95,172-174,177-179,183-185,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqmm_llc cqmm_occu_llc cqmm_mbm_total cqmm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
flush_ll1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 96 97 98 99 103 104 105 109 110 111 115 116
node 0 size: 191960 MB
node 0 free: 185729 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 100 101 102 106 107 108 112 113 114 117
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8268,
2.90GHz

SPECrate®2017_int_base = 586

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: May-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

```
118 119
node 1 size: 193531 MB
node 1 free: 193172 MB
node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 120 121 122 123 127 128 132 133 134
138 139 140
node 2 size: 193502 MB
node 2 free: 193251 MB
node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 124 125 126 129 130 131 135 136 137
141 142 143
node 3 size: 193531 MB
node 3 free: 193227 MB
node 4 cpus: 48 49 50 51 55 56 60 61 62 66 67 68 144 145 146 147 151 152 156 157 158
162 163 164
node 4 size: 193531 MB
node 4 free: 193319 MB
node 5 cpus: 52 53 54 57 58 59 63 64 65 69 70 71 148 149 150 153 154 155 159 160 161
165 166 167
node 5 size: 193531 MB
node 5 free: 193301 MB
node 6 cpus: 72 73 74 75 79 80 84 85 86 90 91 92 168 169 170 171 175 176 180 181 182
186 187 188
node 6 size: 193531 MB
node 6 free: 193294 MB
node 7 cpus: 76 77 78 81 82 83 87 88 89 93 94 95 172 173 174 177 178 179 183 184 185
189 190 191
node 7 size: 193358 MB
node 7 free: 192332 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
  6: 21  21  21  21  21  21  10  11
  7: 21  21  21  21  21  21  11  10
```

```
From /proc/meminfo
MemTotal:      1583593532 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15"
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8268,
2.90GHz

SPECrate®2017_int_base = 586

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: May-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

```
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux RX4770M5 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):           Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

run-level 3 May 30 06:59

```
SPEC is set to: /home/Benchmark/speccpu2017-int
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5        xfs   343G   29G  314G   9%  /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.3.0 for D3753-C1x
03/15/2019
```

```
Memory:
48x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
  | 525.x264_r(base) 557.xz_r(base)
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8268,
2.90GHz

SPECrate®2017_int_base = 586

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
| 541.leela_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8268,
2.90GHz

SPECrate®2017_int_base = 586

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-05-29 18:01:36-0400.

Report generated on 2019-10-01 14:30:55 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.