



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL360 Gen10


(2.70 GHz, Intel Xeon Gold 6258R)

SPECspeed®2017\_int\_base = 10.2

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jan-2020  
Hardware Availability: Feb-2020  
Software Availability: Jun-2019

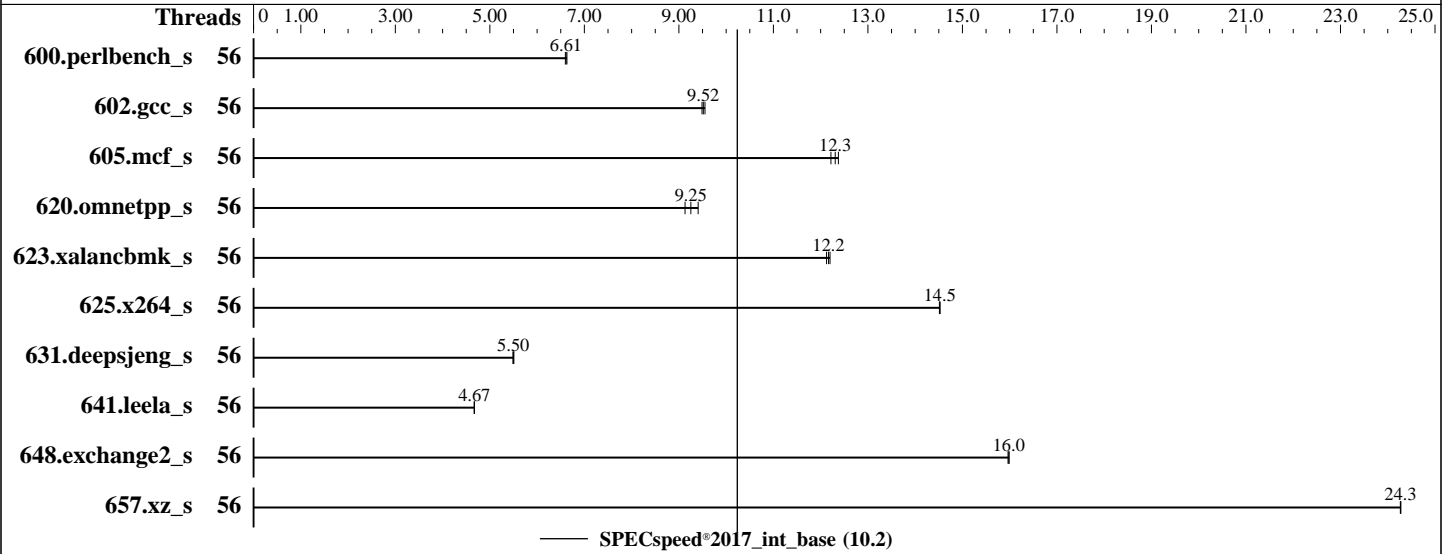

### Hardware

CPU Name: Intel Xeon Gold 6258R  
Max MHz: 4000  
Nominal: 2700  
Enabled: 56 cores, 2 chips  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)  
Storage: 1 x 400 GB SAS SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
Kernel 4.12.14-195-default  
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
Compiler Build 20190416 for Linux;  
Fortran: Version 19.0.4.227 of Intel Fortran  
Compiler Build 20190416 for Linux  
Parallel: Yes  
Firmware: HPE BIOS Version U32 2.22 (11/13/2019) released Dec-2019  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.70 GHz, Intel Xeon Gold 6258R)

SPECspeed®2017\_int\_base = 10.2

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jan-2020  
Hardware Availability: Feb-2020  
Software Availability: Jun-2019

## Results Table

| Benchmark       | Base    |            |             |            |             |            | Peak        |         |         |       |         |       |         |       |
|-----------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|---------|-------|---------|-------|---------|-------|
|                 | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 56      | <b>268</b> | <b>6.61</b> | 269        | 6.60        | 268        | 6.63        |         |         |       |         |       |         |       |
| 602.gcc_s       | 56      | 417        | 9.55        | 420        | 9.49        | <b>418</b> | <b>9.52</b> |         |         |       |         |       |         |       |
| 605.mcf_s       | 56      | <b>384</b> | <b>12.3</b> | 386        | 12.2        | 381        | 12.4        |         |         |       |         |       |         |       |
| 620.omnetpp_s   | 56      | 173        | 9.41        | 179        | 9.13        | <b>176</b> | <b>9.25</b> |         |         |       |         |       |         |       |
| 623.xalancbmk_s | 56      | <b>116</b> | <b>12.2</b> | 116        | 12.2        | 117        | 12.1        |         |         |       |         |       |         |       |
| 625.x264_s      | 56      | 122        | 14.5        | 121        | 14.5        | <b>121</b> | <b>14.5</b> |         |         |       |         |       |         |       |
| 631.deepsjeng_s | 56      | 260        | 5.51        | 261        | 5.49        | <b>261</b> | <b>5.50</b> |         |         |       |         |       |         |       |
| 641.leela_s     | 56      | <b>365</b> | <b>4.67</b> | 365        | 4.67        | 365        | 4.67        |         |         |       |         |       |         |       |
| 648.exchange2_s | 56      | 184        | 16.0        | <b>184</b> | <b>16.0</b> | 184        | 16.0        |         |         |       |         |       |         |       |
| 657.xz_s        | 56      | <b>255</b> | <b>24.3</b> | 255        | 24.3        | 255        | 24.3        |         |         |       |         |       |         |       |

SPECspeed®2017\_int\_base = 10.2

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10**

(2.70 GHz, Intel Xeon Gold 6258R)

SPECspeed®2017\_int\_base = 10.2

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2019

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Enhanced Processor Performance set to Enabled  
Workload Profile set to General Peak Frequency Compute  
Minimum Processor Idle Power Core C-State set to C1E State  
Energy/Performance Bias set to Balanced Power  
Workload Profile set to Custom  
Numa Group Size Optimization set to Flat  
Advanced Memory Protection set to Advanced ECC

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-z3xp Sat Jan 18 22:56:52 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 46 bits physical, 48 bits virtual
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10**

(2.70 GHz, Intel Xeon Gold 6258R)

SPECspeed®2017\_int\_base = 10.2

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** Jun-2019

## Platform Notes (Continued)

```

CPU(s): 56
On-line CPU(s) list: 0-55
Thread(s) per core: 1
Core(s) per socket: 28
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz
Stepping: 7
CPU MHz: 2700.000
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 193095 MB
node 0 free: 190549 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 193529 MB
node 1 free: 193231 MB
node distances:

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10**

(2.70 GHz, Intel Xeon Gold 6258R)

SPECspeed®2017\_int\_base = 10.2

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** Jun-2019

## Platform Notes (Continued)

```
node    0    1
0:     10   21
1:     21   10
```

```
From /proc/meminfo
MemTotal:      395904232 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-z3xp 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
```

```
run-level 3 Jan 18 22:53
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2        btrfs    371G      51G   319G  14% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS:      HPE U32 11/13/2019
Vendor:    HPE
Product:   ProLiant DL360 Gen10
Product Family: ProLiant
Serial:    MXQ94204PV
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10**

(2.70 GHz, Intel Xeon Gold 6258R)

SPECspeed®2017\_int\_base = 10.2

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2019

## Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C          | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
          | 625.x264_s(base) 657.xz_s(base)
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====
C++       | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
          | 641.leela_s(base)
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====
Fortran   | 648.exchange2_s(base)
-----
```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.70 GHz, Intel Xeon Gold 6258R)

SPECspeed®2017\_int\_base = 10.2

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** Jun-2019

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10**

(2.70 GHz, Intel Xeon Gold 6258R)

SPECspeed®2017\_int\_base = 10.2

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-18 12:26:52-0500.

Report generated on 2020-02-25 11:44:50 by CPU2017 PDF formatter v6255.

Originally published on 2020-02-25.