



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6226R)

SPECSpeed®2017_int_base = 9.61

SPECSpeed®2017_int_peak = 9.72

CPU2017 License: 001176


Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

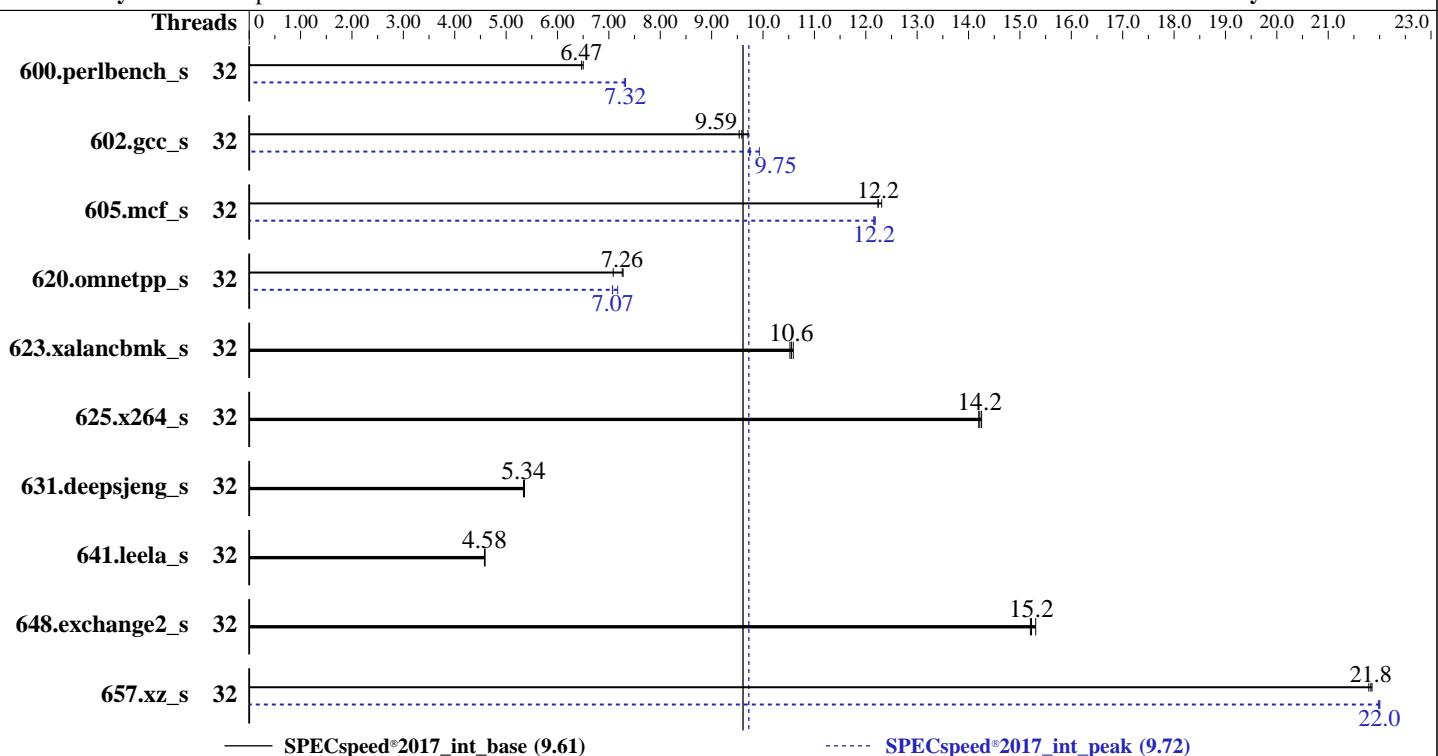

Hardware		Software	
CPU Name:	Intel Xeon Gold 6226R	OS:	Red Hat Enterprise Linux release 8.1
Max MHz:	3900		Kernel 4.18.0-147.el8.x86_64
Nominal:	2900	Compiler:	C/C++: Version 19.0.5.281 of Intel
Enabled:	32 cores, 2 chips		C/C++ Compiler for Linux;
Orderable:	1,2 chips		Fortran: Version 19.0.5.281 of
Cache L1:	32 KB I + 32 KB D on chip per core		Intel Fortran Compiler for Linux
L2:	1 MB I+D on chip per core	Parallel:	Yes
L3:	22 MB I+D on chip per chip	Firmware:	Version 3.3 released Feb-2020
Other:	None	File System:	xfs
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)	System State:	Run level 3 (multi-user)
Storage:	1 x 200 GB SATA III SSD	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
		Other:	jemalloc memory allocator V5.0.1
		Power Management:	BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 9.61

SPECspeed®2017_int_peak = 9.72

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	274	6.47	274	6.47	273	6.50	32	243	7.30	242	7.32	242	7.32		
602.gcc_s	32	415	9.59	418	9.54	410	9.71	32	401	9.93	408	9.75	409	9.74		
605.mcf_s	32	386	12.2	386	12.2	384	12.3	32	388	12.2	387	12.2	388	12.2		
620.omnetpp_s	32	230	7.08	225	7.26	224	7.28	32	231	7.07	227	7.17	231	7.07		
623.xalancbmk_s	32	134	10.6	134	10.6	135	10.5	32	134	10.6	134	10.6	135	10.5		
625.x264_s	32	124	14.2	124	14.2	124	14.3	32	124	14.2	124	14.2	124	14.3		
631.deepsjeng_s	32	268	5.34	268	5.34	267	5.36	32	268	5.34	268	5.34	267	5.36		
641.leela_s	32	373	4.58	373	4.58	372	4.59	32	373	4.58	373	4.58	372	4.59		
648.exchange2_s	32	193	15.2	193	15.2	192	15.3	32	193	15.2	193	15.2	192	15.3		
657.xz_s	32	284	21.8	283	21.9	283	21.8	32	281	22.0	281	22.0	281	22.0		
SPECspeed®2017_int_base =				9.61				SPECspeed®2017_int_peak =				9.72				

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 9.61

SPECspeed®2017_int_peak = 9.72

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Hyper-Threading = Disable

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Performance

Stale AtoS = Disable

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011

running on RHEL81-01 Mon Apr 13 10:37:42 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings : 16
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Thread(s) per core:   1
Core(s) per socket:   16
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
Stepping:               7
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 9.61

SPECspeed®2017_int_peak = 9.72

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Platform Notes (Continued)

CPU MHz: 3336.860
CPU max MHz: 3900.0000
CPU min MHz: 1200.0000
BogoMIPS: 5800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 22528K
NUMA node0 CPU(s): 0-15
NUMA node1 CPU(s): 16-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpn rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 22528 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 192092 MB
node 0 free: 190955 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 193532 MB
node 1 free: 192243 MB
node distances:
node 0 1
0: 10 21
1: 21 10

From /proc/meminfo
MemTotal: 394879828 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 9.61

SPECspeed®2017_int_peak = 9.72

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Platform Notes (Continued)

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

uname -a:

```
Linux RHEL81-01 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Apr 9 20:10

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	185G	8.2G	177G	5%	/

From /sys/devices/virtual/dmi/id

```
BIOS: American Megatrends Inc. 3.3 02/21/2020
Vendor: Supermicro
Product: Super Server
Serial: 0123456789
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
12x Micron Technology 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 9.61

SPECspeed®2017_int_peak = 9.72

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Platform Notes (Continued)

12x NO DIMM NO DIMM

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

Fortran | 648.exchange2_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 9.61

SPECspeed®2017_int_peak = 9.72

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-L/usr/local/jetson-tx2/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 9.61

SPECspeed®2017_int_peak = 9.72

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
    -prof-use(pass 2) -O2 -xCORE-AVX512
    -qopt-mem-layout-trans=4 -ipo -O3 -no-prec-div
    -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
    -fno-strict-overflow -L/usr/local/je5.0.1-64/lib
    -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
    -prof-use(pass 2) -O2 -xCORE-AVX512
    -qopt-mem-layout-trans=4 -ipo -O3 -no-prec-div
    -DSPEC_SUPPRESS_OPENMP -L/usr/local/je5.0.1-64/lib
    -ljemalloc
```

```
605.mcf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
    -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
    -qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp
    -DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

625.x264_s: basepeak = yes

```
657.xz_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
    -prof-use(pass 2) -O2 -xCORE-AVX512
    -qopt-mem-layout-trans=4 -ipo -O3 -no-prec-div
    -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
    -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
    -ipo -xCORE-AVX512 -O3 -no-prec-div
    -qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP
    -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
    -lqkalloc
```

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4
(X11DPU , Intel Xeon Gold 6226R)

SPECspeed®2017_int_base = 9.61

SPECspeed®2017_int_peak = 9.72

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

Peak Optimization Flags (Continued)

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revF.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revF.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-12 22:37:42-0400.

Report generated on 2020-04-28 15:31:55 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-28.