



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## NEC Corporation


SPECspeed®2017\_int\_base = 9.72

Express5800/R120h-1M (Intel Xeon Gold 6226R)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Jan-2021  
Hardware Availability: May-2020  
Software Availability: Sep-2019

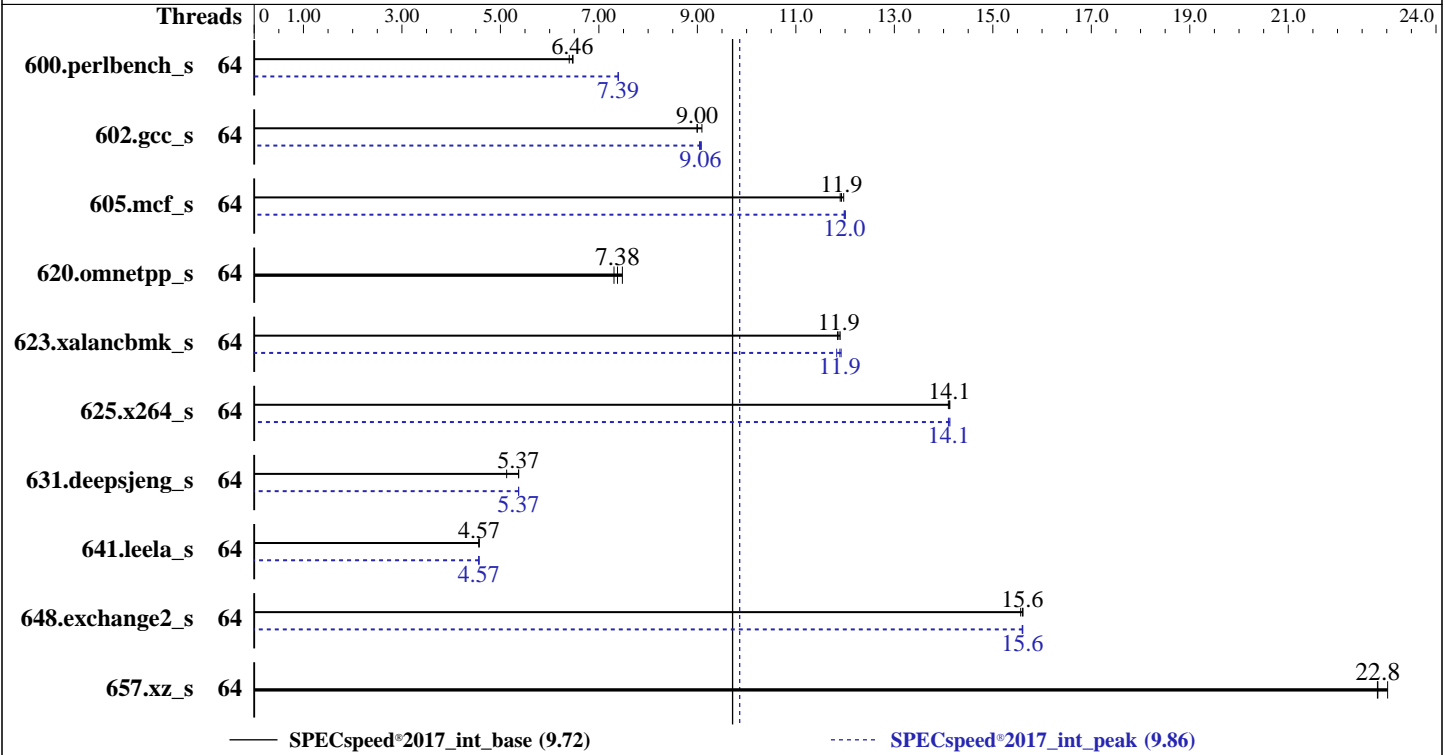

### Hardware

CPU Name: Intel Xeon Gold 6226R  
 Max MHz: 3900  
 Nominal: 2900  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)  
 Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)  
 Kernel 3.10.0-1062.1.1.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: Yes  
 Firmware: NEC BIOS Version U32 v2.32 03/09/2020 released Jun-2020  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_int\_base = 9.72

Express5800/R120h-1M (Intel Xeon Gold 6226R)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Jan-2021  
Hardware Availability: May-2020  
Software Availability: Sep-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	277	6.40	<b><u>275</u></b>	<b><u>6.46</u></b>	274	6.48	64	<b><u>240</u></b>	<b><u>7.39</u></b>	240	7.39	240	7.40
602.gcc_s	64	443	8.99	<b><u>442</u></b>	<b><u>9.00</u></b>	438	9.09	64	<b><u>439</u></b>	<b><u>9.06</u></b>	440	9.04	439	9.08
605.mcf_s	64	<b><u>396</u></b>	<b><u>11.9</u></b>	397	11.9	394	12.0	64	394	12.0	393	12.0	<b><u>394</u></b>	<b><u>12.0</u></b>
620.omnetpp_s	64	218	7.48	<b><u>221</u></b>	<b><u>7.38</u></b>	223	7.31	64	218	7.48	<b><u>221</u></b>	<b><u>7.38</u></b>	223	7.31
623.xalancbmk_s	64	120	11.8	119	11.9	<b><u>119</u></b>	<b><u>11.9</u></b>	64	<b><u>119</u></b>	<b><u>11.9</u></b>	119	11.9	120	11.8
625.x264_s	64	125	14.1	<b><u>125</u></b>	<b><u>14.1</u></b>	125	14.1	64	<b><u>125</u></b>	<b><u>14.1</u></b>	125	14.1	125	14.1
631.deepsjeng_s	64	279	5.13	267	5.37	<b><u>267</u></b>	<b><u>5.37</u></b>	64	267	5.37	267	5.37	<b><u>267</u></b>	<b><u>5.37</u></b>
641.leela_s	64	374	4.57	<b><u>374</u></b>	<b><u>4.57</u></b>	374	4.57	64	374	4.56	374	4.57	<b><u>374</u></b>	<b><u>4.57</u></b>
648.exchange2_s	64	<b><u>188</u></b>	<b><u>15.6</u></b>	188	15.6	189	15.6	64	<b><u>188</u></b>	<b><u>15.6</u></b>	188	15.6	188	15.6
657.xz_s	64	<b><u>271</u></b>	<b><u>22.8</u></b>	269	23.0	271	22.8	64	<b><u>271</u></b>	<b><u>22.8</u></b>	269	23.0	271	22.8

SPECspeed®2017\_int\_base = **9.72**

SPECspeed®2017\_int\_peak = **9.86**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_int\_base = 9.72

Express5800/R120h-1M (Intel Xeon Gold 6226R)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jan-2021

Hardware Availability: May-2020

Software Availability: Sep-2019

### General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Settings:

- Thermal Configuration: Maximum Cooling
- Workload Profile: General Peak Frequency Compute
- Memory Patrol Scrubbing: Disabled
- LLC Dead Line Allocation: Disabled
- LLC Prefetch: Enabled
- Enhanced Processor Performance: Enabled
- Workload Profile: Custom
- NUMA Group Size Optimization: Flat

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on r120h1m Wed Jan 6 14:27:00 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
 2 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_int\_base = 9.72

Express5800/R120h-1M (Intel Xeon Gold 6226R)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Jan-2021  
Hardware Availability: May-2020  
Software Availability: Sep-2019

### Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
Stepping: 7
CPU MHz: 2900.000
BogoMIPS: 5800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 22528K
NUMA node0 CPU(s): 0-15,32-47
NUMA node1 CPU(s): 16-31,48-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 32 33 34 35 36 37 38 39 40 41 42 43
44 45 46 47
node 0 size: 196265 MB
node 0 free: 191568 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63
node 1 size: 196607 MB
node 1 free: 192046 MB
node distances:
node 0 1
0: 10 21
1: 21 10

```

```

From /proc/meminfo
MemTotal: 395919752 kB
HugePages_Total: 0

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_int\_base = 9.72

Express5800/R120h-1M (Intel Xeon Gold 6226R)

SPECspeed®2017\_int\_peak = 9.86

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jan-2021  
**Hardware Availability:** May-2020  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

Hugepagesize: 2048 kB

/sbin/tuned-adm active  
Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server
```

```
uname -a:
Linux r120h1m 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	No status reported
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full retpoline, IBPB
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	No status reported

run-level 3 Jan 6 14:21

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  908G  260G  603G  31% /
```

```
From /sys/devices/virtual/dmi/id
Vendor: NEC
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_int\_base = 9.72

Express5800/R120h-1M (Intel Xeon Gold 6226R)

SPECspeed®2017\_int\_peak = 9.86

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jan-2021  
**Hardware Availability:** May-2020  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

Product: Express5800/R120h-1M  
Serial: JPN0084094

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
24x HPE P03050-091 16 GB 2 rank 2933

BIOS:  
BIOS Vendor: NEC  
BIOS Version: U32  
BIOS Date: 03/09/2020  
BIOS Revision: 2.32  
Firmware Revision: 2.14

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base,  
| peak) 625.x264\_s(base, peak) 657.xz\_s(base, peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed®2017\_int\_base = 9.72

Express5800/R120h-1M (Intel Xeon Gold 6226R)

SPECspeed®2017\_int\_peak = 9.86

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Jan-2021

**Hardware Availability:** May-2020

**Software Availability:** Sep-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed®2017\_int\_base = 9.72

Express5800/R120h-1M (Intel Xeon Gold 6226R)

SPECspeed®2017\_int\_peak = 9.86

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Jan-2021

**Hardware Availability:** May-2020

**Software Availability:** Sep-2019

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed®2017\_int\_base = 9.72

Express5800/R120h-1M (Intel Xeon Gold 6226R)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jan-2021

Hardware Availability: May-2020

Software Availability: Sep-2019

## Peak Optimization Flags (Continued)

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64

-lqkmalloc

631.deepsjeng\_s: Same as 623.xalancbmk\_s

641.leela\_s: Same as 623.xalancbmk\_s

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4

-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-01-06 00:26:59-0500.

Report generated on 2021-02-02 19:47:00 by CPU2017 PDF formatter v6255.

Originally published on 2021-02-02.