



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2021

Software Availability: Dec-2022

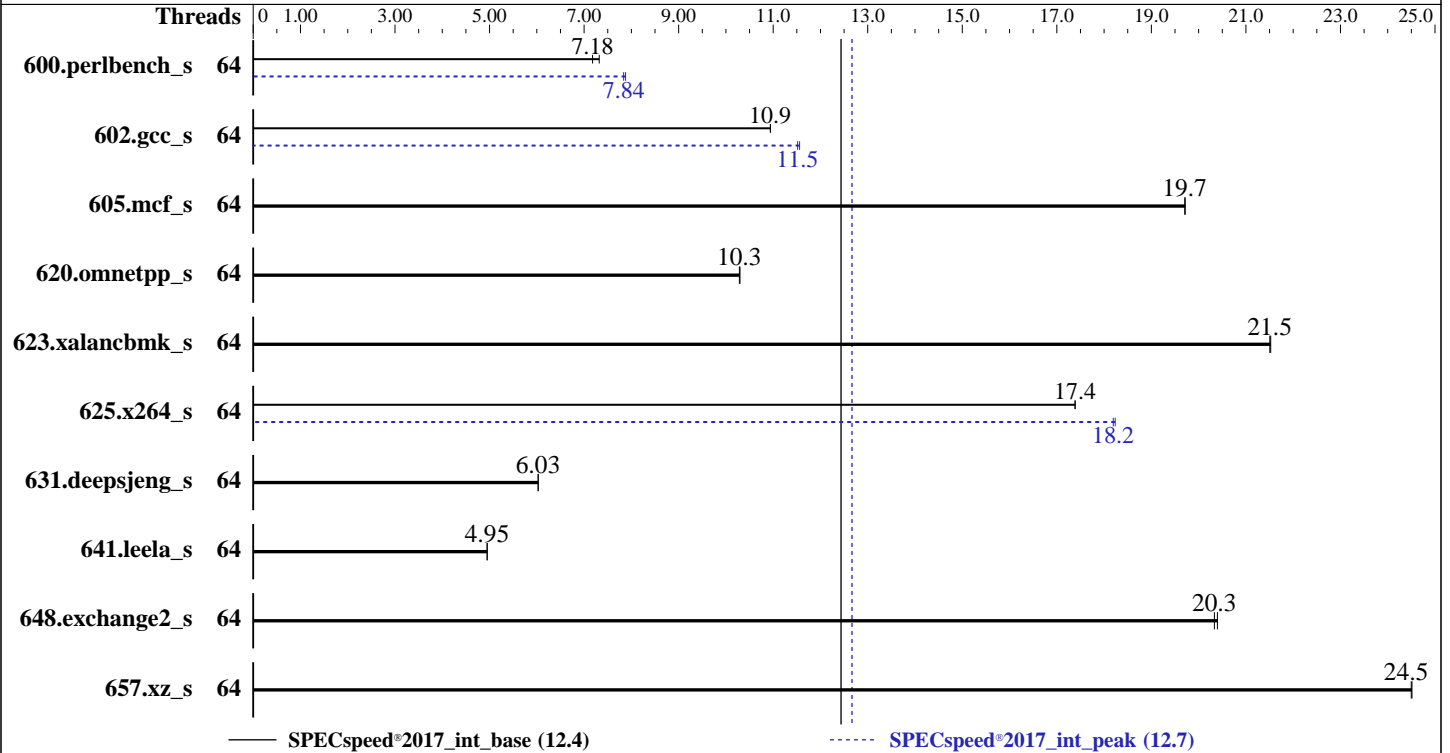

Hardware

CPU Name: Intel Xeon Gold 6338N
 Max MHz: 3500
 Nominal: 2200
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 48 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 60 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 1.9.2 released Nov-2022
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2023
Hardware Availability: May-2021
Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|------------|-------------|-------------|-------------|---------|-------|---------|-------------|-------------|-------------|-------------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 64 | 247 | 7.18 | 242 | 7.32 | | | 64 | 226 | 7.84 | 225 | 7.88 | | |
| 602.gcc_s | 64 | 364 | 10.9 | 364 | 10.9 | | | 64 | 346 | 11.5 | 345 | 11.6 | | |
| 605.mcf_s | 64 | 239 | 19.7 | 240 | 19.7 | | | 64 | 239 | 19.7 | 240 | 19.7 | | |
| 620.omnetpp_s | 64 | 158 | 10.3 | 159 | 10.3 | | | 64 | 158 | 10.3 | 159 | 10.3 | | |
| 623.xalancbmk_s | 64 | 65.8 | 21.5 | 65.9 | 21.5 | | | 64 | 65.8 | 21.5 | 65.9 | 21.5 | | |
| 625.x264_s | 64 | 101 | 17.4 | 101 | 17.4 | | | 64 | 97.0 | 18.2 | 96.7 | 18.2 | | |
| 631.deepsjeng_s | 64 | 238 | 6.03 | 238 | 6.03 | | | 64 | 238 | 6.03 | 238 | 6.03 | | |
| 641.leela_s | 64 | 345 | 4.95 | 345 | 4.95 | | | 64 | 345 | 4.95 | 345 | 4.95 | | |
| 648.exchange2_s | 64 | 145 | 20.3 | 144 | 20.4 | | | 64 | 145 | 20.3 | 144 | 20.4 | | |
| 657.xz_s | 64 | 252 | 24.5 | 252 | 24.5 | | | 64 | 252 | 24.5 | 252 | 24.5 | | |

SPECspeed®2017_int_base = **12.4**

SPECspeed®2017_int_peak = **12.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2021

Software Availability: Dec-2022

General Notes (Continued)

Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```

  ADDDC Setting : Disabled
  DIMM Self Healing on
  Uncorrectable Memory Error : Disabled
  Logical Processor : Disabled
  Virtualization Technology : Disabled
  Optimizer Mode : Enabled

  System Profile : Custom
  CPU Power Management : Maximum Performance
  CLE : Disabled
  C States : Autonomous
  Memory Patrol Scrub : Disabled
  Energy Efficiency Policy : Performance
  PCI ASPM L1 Link
  Power Management : Disabled

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Thu May 25 01:50:30 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpubower frequency-info

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2021

Software Availability: Dec-2022

Platform Notes (Continued)

```

15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
01:50:30 up 6 min, 1 user, load average: 0.36, 0.10, 0.03
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root     tty1    -             01:49   38.00s  1.19s  0.00s /bin/bash ./dell-run-speccpu.sh speed
--define DL-BIOSinc=Dell-BIOS_Xeon-3.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define
DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt

```

```

3. Username
From environment variable $USER: root

```

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4125414
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125414
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-3.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-3.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=64 --tune base,peak -o all --define

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```

intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-3.inc --define
DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=64 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-3.inc
--define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format
csv,html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed intspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping       : 6
microcode      : 0xd000389
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      46 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             64
On-line CPU(s) list: 0-63
Vendor ID:          GenuineIntel
Model name:         Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
CPU family:         6
Model:              106
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s):          2
Stepping:           6
CPU max MHz:        3500.0000
CPU min MHz:        800.0000
BogoMIPS:           4400.00
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2023
Hardware Availability: May-2021
Software Availability: Dec-2022

Platform Notes (Continued)

nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig flush_l1d arch_capabilities

L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 80 MiB (64 instances)
L3 cache: 96 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 48K | 3M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 2M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1.3M | 80M | 20 | Unified | 2 | 1024 | 1 | 64 |
| L3 | 48M | 96M | 12 | Unified | 3 | 65536 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
node 0 size: 515317 MB
node 0 free: 514293 MB
node 1 cpus: 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63
node 1 size: 516058 MB
node 1 free: 506765 MB
node distances:
node 0 1
0: 10 20
1: 20 10

9. /proc/meminfo

MemTotal: 1056129372 kB

10. who -r

run-level 3 May 25 01:44

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2021

Software Availability: Dec-2022

Platform Notes (Continued)

```
-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target  Status
    multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled         apparmor auditd cron firewalld getty@ haveged irqbalance issue-generator kbdsettings
                   postfix purge-kernels rollback sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                   wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled        bmc-snmpproxy boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                   ebttables exchange-bmc-os-info grub2-once haveged-switch-root ipmievdpvpsadm
                   issue-add-ssh-keys kexec-load lunmask netlabel racoon racoon-setkey rdisc rpmconfigcheck
                   rsyncd serial-getty@ snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
    indirect        wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=0b46c224-29bd-4ee7-a1a0-fda5256c0c9a
    splash=silent
    mitigations=auto
    quiet
    security=apparmor
```

```
-----
14. cpupower frequency-info
    analyzing CPU 0:
        current policy: frequency should be within 800 MHz and 3.50 GHz.
                       The governor "powersave" may decide which speed to use
                       within this range.
    boost state support:
        Supported: yes
        Active: yes
```

```
-----
15. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space     2
    vm.compaction_proactiveness    20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio     10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs     3000
    vm.dirty_ratio                 20
    vm.dirty_writeback_centisecs  500
    vm.dirtytime_expire_seconds   43200
    vm.extfrag_threshold          500
    vm.min_unmapped_ratio         1
    vm.nr_hugepages               0
    vm.nr_hugepages_mempolicy     0
    vm.nr_overcommit_hugepages    0
    vm.swappiness                  60
    vm.watermark_boost_factor     15000
    vm.watermark_scale_factor     10
    vm.zone_reclaim_mode          0
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2021

Software Availability: Dec-2022

Platform Notes (Continued)

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
-----
```

```
-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem  Type  Size  Used Avail Use% Mounted on
tmpfs       tmpfs 60G  4.2G  56G   7% /mnt/ramdisk
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R650
Product Family: PowerEdge
Serial:      DFLTSTG
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
1x 002C069D002C 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200, configured at 2666
12x 00AD063200AD HMAA8GR7AJR4N-XN 64 GB 2 rank 3200, configured at 2666
1x 00AD069D00AD HMAA8GR7AJR4N-XN 64 GB 2 rank 3200, configured at 2666
2x 00CE063200CE M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2666
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.9.2
BIOS Date:        11/17/2022
BIOS Revision:    1.9
-----
```




SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2021

Software Availability: Dec-2022

Compiler Version Notes

```

-----
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
-----

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

```

```

-----
C++   | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
-----

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

```

```

-----
Fortran | 648.exchange2_s(base, peak)
-----

```

```

-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2021

Software Availability: Dec-2022

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2021

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

600.perlbench_s (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)

```
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
```

```
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
```

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

```
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
```

```
-ljemalloc
```

605.mcf_s: basepeak = yes

625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3

```
-ffast-math -flto -mfpmath=sse -funroll-loops
```

```
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
```

```
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.4

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2021

Software Availability: Dec-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-25 02:50:30-0400.
Report generated on 2024-01-29 17:50:05 by CPU2017 PDF formatter v6716.
Originally published on 2023-06-20.