



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

Endeavor (Intel Xeon E5-2670, 2.60 GHz, DDR3-1333 MHz, SMT on, Turbo on)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 27.9

MPI2007 license: 13


Test sponsor: Intel Corporation

Tested by: Pavel Shelepugin

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Sep-2011

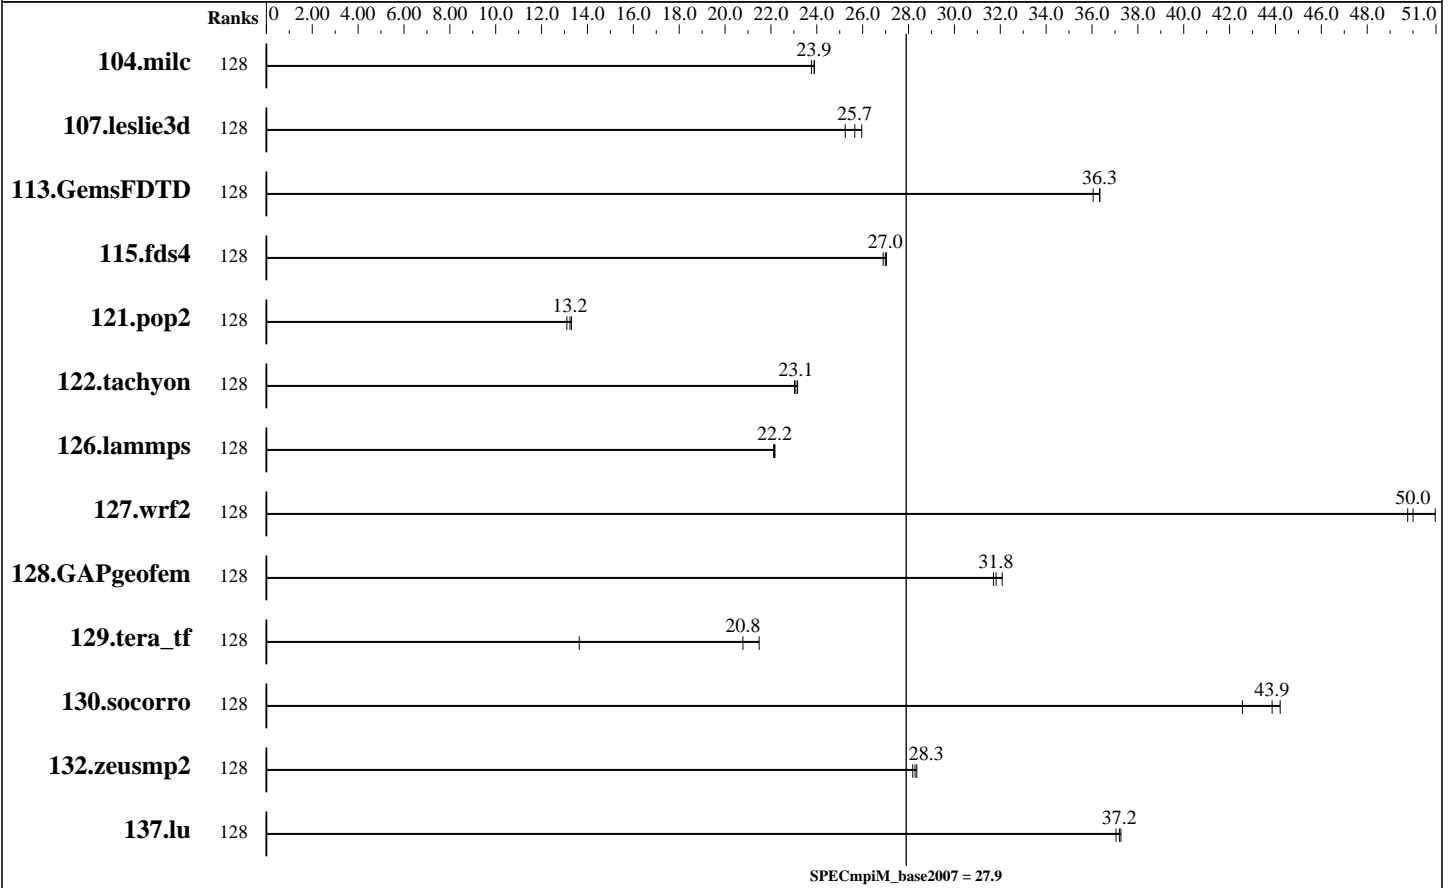

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	128	65.8	23.8	<b><u>65.5</u></b>	<b><u>23.9</u></b>	65.5	23.9									
107.leslie3d	128	201	26.0	207	25.2	<b><u>203</u></b>	<b><u>25.7</u></b>									
113.GemsFDTD	128	175	36.1	<b><u>174</u></b>	<b><u>36.3</u></b>	174	36.3									
115.fds4	128	72.2	27.0	72.5	26.9	<b><u>72.3</u></b>	<b><u>27.0</u></b>									
121.pop2	128	315	13.1	310	13.3	<b><u>312</u></b>	<b><u>13.2</u></b>									
122.tachyon	128	121	23.0	<b><u>121</u></b>	<b><u>23.1</u></b>	121	23.2									
126.lammps	128	132	22.1	<b><u>132</u></b>	<b><u>22.2</u></b>	131	22.2									
127.wrf2	128	157	49.8	<b><u>156</u></b>	<b><u>50.0</u></b>	153	51.0									
128.GAPgeofem	128	<b><u>64.9</u></b>	<b><u>31.8</u></b>	64.4	32.1	65.1	31.7									
129.tera_tf	128	203	13.6	<b><u>133</u></b>	<b><u>20.8</u></b>	129	21.5									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

Endeavor (Intel Xeon E5-2670, 2.60 GHz, DDR3-1333 MHz, SMT on, Turbo on)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 27.9

MPI2007 license: 13

Test sponsor: Intel Corporation

Tested by: Pavel Shelepugin

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Sep-2011

## Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	128	89.7	42.6	<b>87.0</b>	<b>43.9</b>	86.3	44.2							
132.zeusmp2	128	<b>110</b>	<b>28.3</b>	109	28.4	110	28.2							
137.lu	128	<b>98.8</b>	<b>37.2</b>	98.7	37.3	99.2	37.0							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Hardware Summary

Type of System: Homogeneous  
 Compute Node: Endeavor Node  
 Interconnects: IB Switch  
 Gigabit Ethernet  
 File Server Node: NFS  
 Total Compute Nodes: 8  
 Total Chips: 16  
 Total Cores: 128  
 Total Threads: 256  
 Total Memory: 512 GB  
 Base Ranks Run: 128  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C++ Composer XE 2011 for Linux, Version 12.0.5.220 Build 20110719  
 C++ Compiler: Intel C++ Composer XE 2011 for Linux, Version 12.0.5.220 Build 20110719  
 Fortran Compiler: Intel Fortran Composer XE 2011 for Linux, Version 12.0.5.220 Build 20110719  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: Intel MPI Library 4.0.3.008 for Linux  
 Other MPI Info: None  
 Pre-processors: No  
 Other Software: None

## Node Description: Endeavor Node

### Hardware

Number of nodes: 8  
 Uses of the node: compute  
 Vendor: Intel  
 Model: R1208GLBPP  
 CPU Name: Intel Xeon E5-2670  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 16  
 Cores per chip: 8  
 Threads per core: 2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.3 GHz, 8.0 GT/s QPI, Hyper-Threading enabled  
 CPU MHz: 2600  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip, 20 MB shared / 8 cores  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R, ECC, running at 1333MHz and CL9)  
 Disk Subsystem: Seagate 600 GB SSD ST9600205SS  
 Other Hardware: None  
 Adapter: Intel (ESB2) 82575EB Dual-Port Gigabit Ethernet Controller  
 Number of Adapters: 1

### Software

Adapter: Intel (ESB2) 82575EB Dual-Port Gigabit Ethernet Controller  
 Adapter Driver: e1000  
 Adapter Firmware: None  
 Adapter: Mellanox MHQH29-XTC  
 Adapter Driver: OFED 1.5.3.1  
 Adapter Firmware: 2.10.0  
 Operating System: Red Hat EL 6.1, kernel 2.6.32-131  
 Local File System: Linux/ext2  
 Shared File System: NFS  
 System State: Multi-User  
 Other Software: Platform LSF 8.0

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

SPECmpiM\_peak2007 = Not Run

Endeavor (Intel Xeon E5-2670, 2.60 GHz, DDR3-1333 MHz, SMT on, Turbo on)

SPECmpiM\_base2007 = 27.9

MPI2007 license: 13

Test date: Feb-2012

Test sponsor: Intel Corporation

Hardware Availability: Mar-2012

Tested by: Pavel Shelepugin

Software Availability: Sep-2011

### Node Description: Endeavor Node

Slot Type:	PCI-Express x8
Data Rate:	1Gbps Ethernet
Ports Used:	2
Interconnect Type:	Ethernet
Adapter:	Mellanox MHQH29-XTC
Number of Adapters:	1
Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x QDR
Ports Used:	1
Interconnect Type:	InfiniBand

### Node Description: NFS

Hardware	
Number of nodes:	1
Uses of the node:	fileserver
Vendor:	Intel
Model:	S7000FC4UR
CPU Name:	Intel Xeon CPU
CPU(s) orderable:	1-4 chips
Chips enabled:	4
Cores enabled:	16
Cores per chip:	4
Threads per core:	2
CPU Characteristics:	--
CPU MHz:	2926
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	64 GB
Disk Subsystem:	8 disks, 500GB/disk, 2.7TB total
Other Hardware:	None
Adapter:	Intel 82563GB Dual-Port Gigabit Ethernet Controller
Number of Adapters:	1
Slot Type:	PCI-Express x8
Data Rate:	1Gbps Ethernet
Ports Used:	1
Interconnect Type:	Ethernet

Software	
Adapter:	Intel 82563GB Dual-Port Gigabit Ethernet Controller
Adapter Driver:	e1000e
Adapter Firmware:	N/A
Operating System:	RedHat EL 5 Update 4
Local File System:	None
Shared File System:	NFS
System State:	Multi-User
Other Software:	None



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

Endeavor (Intel Xeon E5-2670, 2.60 GHz, DDR3-1333 MHz, SMT on, Turbo on)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 27.9

MPI2007 license: 13

Test sponsor: Intel Corporation

Tested by: Pavel Shelepugin

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Sep-2011

### Interconnect Description: IB Switch

Hardware	Software
Vendor: Mellanox Model: Mellanox MTS3600Q-1UNC Switch Model: Mellanox MTS3600Q-1UNC Number of Switches: 46 Number of Ports: 36 Data Rate: InfiniBand 4x QDR Firmware: 7.2.0 Topology: Fat tree Primary Use: MPI traffic	

### Interconnect Description: Gigabit Ethernet

Hardware	Software
Vendor: Force10 Networks Model: Force10 S50, Force10 C300 Switch Model: Force10 S50, Force10 C300 Number of Switches: 15 Number of Ports: 48 Data Rate: 1Gbps Ethernet, 10Gbps Ethernet Firmware: 8.2.1.0 Topology: Fat tree Primary Use: Cluster File System	

### Submit Notes

The config file option 'submit' was used.

### General Notes

130.socorro (base): "nullify\_ptrs" src.alt was used.

MPI startup command:

mpiexec.hydra command was used to start MPI jobs.

BIOS settings:

Intel Hyper-Threading Technology (SMT): Enabled (default is Enabled)

Intel Turbo Boost Technology (Turbo) : Enabled (default is Enabled)

RAM configuration:

Compute nodes have 2x8-GB RDIMM on each memory channel.

Network:

Forty six 36-port switches: 18 core switches and 28 leaf switches.

Each leaf has one link to each core. Remaining 18 ports on 25 of 28 leafs are used for compute nodes. On the remaining 3 leafs the ports are used

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**Intel Corporation**

Endeavor (Intel Xeon E5-2670, 2.60 GHz,  
DDR3-1333 MHz, SMT on, Turbo on)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 27.9

**MPI2007 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Pavel Shelepugin

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Sep-2011

## General Notes (Continued)

for FS nodes and other peripherals.

Job placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e. the minimal needed number of leaf switches was used for each job: 1 switch for 16/32/64/128/256 ranks, 2 switches for 512 ranks, 4 switches for 1024 ranks, 8 switches for 2048 ranks.

Platform LSF was used for job submission. It has no impact on performance. Information can be found at: <http://www.platform.com>

## Base Compiler Invocation

C benchmarks:  
mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:  
mpiifort

Benchmarks using both Fortran and C:  
mpiicc mpiifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG  
126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK  
127.wrf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX

## Base Optimization Flags

C benchmarks:  
-O3 -xAVX -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xAVX -no-prec-div

Fortran benchmarks:  
-O3 -xAVX -no-prec-div

Benchmarks using both Fortran and C:  
-O3 -xAVX -no-prec-div



# SPEC MPI2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

Endeavor (Intel Xeon E5-2670, 2.60 GHz, DDR3-1333 MHz, SMT on, Turbo on)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 27.9

**MPI2007 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Pavel Shelepugin

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Sep-2011

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.html](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Tue Jul 22 13:45:16 2014 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 7 March 2012.