SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS21 (Intel Xeon E5420)

SPECint®_rate2006 = 116

SPECint_rate_base2006 = 94.8

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Dec-2007
Hardware Availability: Jan-2008
Software Availability: Nov-2007

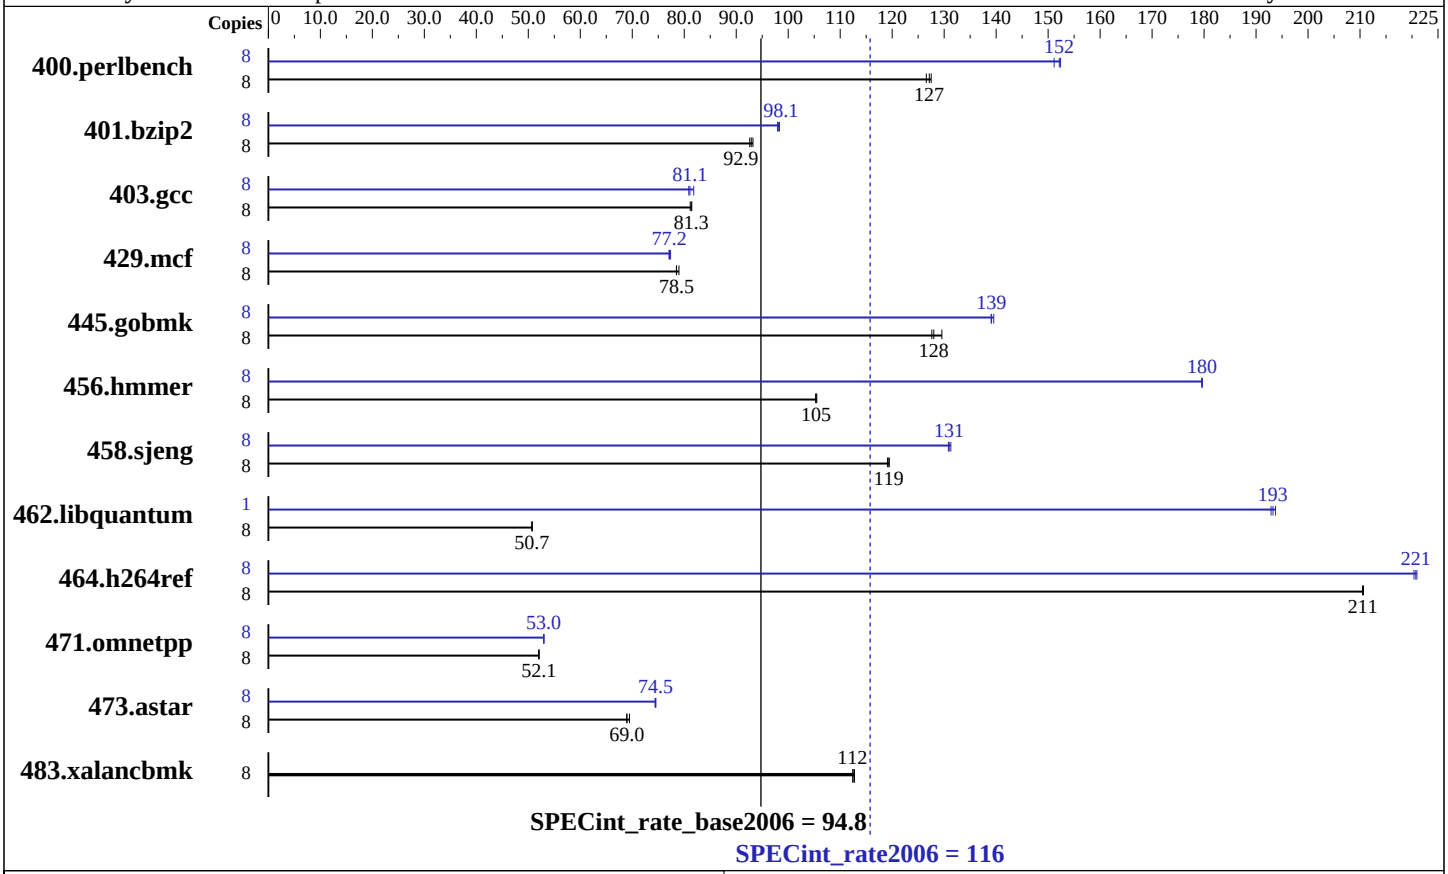

Hardware

CPU Name:	Intel Xeon E5420
CPU Characteristics:	1333MHz system bus
CPU MHz:	2493
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem:	1 x 36 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS21 (Intel Xeon E5420)

SPECint_rate2006 = 116

SPECint_rate_base2006 = 94.8

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Dec-2007
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**615**	**127**	618	127	613	128	8	517	151	**514**	**152**	513	152
401.bzip2	8	**831**	**92.9**	834	92.6	828	93.2	8	785	98.3	**787**	**98.1**	788	98.0
403.gcc	8	791	81.4	**792**	**81.3**	794	81.1	8	796	80.9	**794**	**81.1**	787	81.8
429.mcf	8	924	79.0	930	78.5	**929**	**78.5**	8	943	77.4	947	77.1	**946**	**77.2**
445.gobmk	8	648	130	658	128	**656**	**128**	8	**603**	**139**	604	139	601	140
456.hmmer	8	**708**	**105**	709	105	708	105	8	416	180	415	180	**415**	**180**
458.sjeng	8	813	119	810	119	**811**	**119**	8	**739**	**131**	740	131	737	131
462.libquantum	8	3266	50.8	3270	50.7	**3267**	**50.7**	1	**107**	**193**	107	194	107	193
464.h264ref	8	841	210	**841**	**211**	840	211	8	**802**	**221**	801	221	803	220
471.omnetpp	8	**961**	**52.1**	960	52.1	961	52.0	8	943	53.0	944	53.0	**944**	**53.0**
473.astar	8	**814**	**69.0**	808	69.5	814	69.0	8	**754**	**74.5**	755	74.4	753	74.5
483.xalancbmk	8	491	112	490	113	**491**	**112**	8	491	112	490	113	**491**	**112**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

456.hmmer:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:30:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2008.