



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 32.7

IBM System x3650 M2 (Intel Xeon E5530)

SPECfp_base2006 = 30.9

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

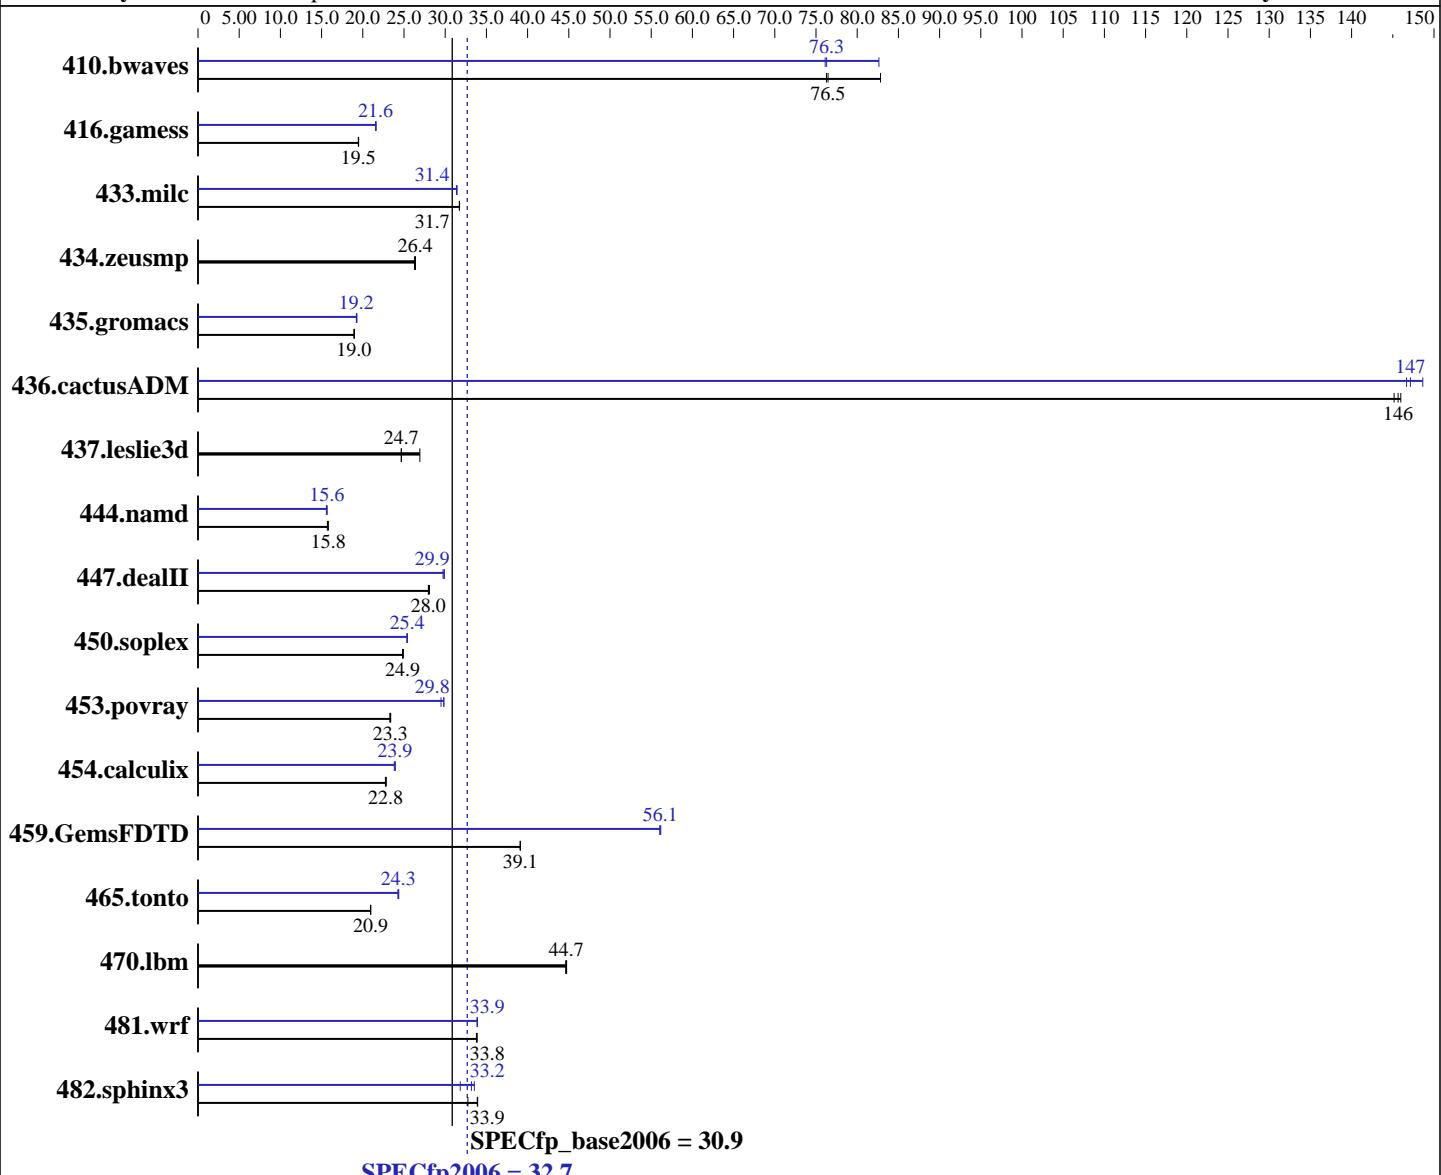

Hardware

CPU Name: Intel Xeon E5530
CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server (x86_64)
SP2 with patch Linux kernel 20090119,
Kernel 2.6.16.60-0.34-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux
Build 20090131 Package ID: l_cproc_p_11.0.080,
l_cprof_p_11.0.080
Auto Parallel: Yes
File System: ReiserFS
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.7

IBM System x3650 M2 (Intel Xeon E5530)

SPECfp_base2006 = 30.9

CPU2006 license: 11

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (12 x 2 GB PC3-10600R, 2 Rank, running at 1066 MHz)
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	164	82.8	178	76.3	<u>178</u>	<u>76.5</u>	164	82.6	<u>178</u>	<u>76.3</u>	179	76.1
416.gamess	1006	19.5	1004	19.5	1006	19.5	908	21.6	908	21.6	906	21.6
433.milc	289	31.7	289	31.7	289	31.7	292	31.4	293	31.4	293	31.4
434.zeusmp	345	26.4	345	26.4	346	26.3	345	26.4	345	26.4	346	26.3
435.gromacs	377	18.9	376	19.0	377	19.0	372	19.2	371	19.2	370	19.3
436.cactusADM	82.3	145	81.9	146	82.0	146	80.4	149	81.2	147	81.5	147
437.leslie3d	349	26.9	381	24.7	381	24.7	349	26.9	381	24.7	381	24.7
444.namd	511	15.7	508	15.8	508	15.8	515	15.6	512	15.7	513	15.6
447.dealII	407	28.1	409	28.0	409	28.0	383	29.9	385	29.7	383	29.9
450.soplex	336	24.9	336	24.8	335	24.9	328	25.4	329	25.3	328	25.4
453.povray	227	23.4	228	23.3	228	23.3	178	29.8	178	29.8	180	29.5
454.calculix	361	22.9	363	22.7	362	22.8	346	23.8	345	23.9	345	23.9
459.GemsFDTD	271	39.1	271	39.1	271	39.1	189	56.2	189	56.0	189	56.1
465.tonto	470	20.9	470	20.9	470	21.0	404	24.4	405	24.3	405	24.3
470.lbm	307	44.7	308	44.6	307	44.7	307	44.7	308	44.6	307	44.7
481.wrf	330	33.8	330	33.9	331	33.8	329	33.9	330	33.9	330	33.9
482.sphinx3	595	32.8	574	33.9	575	33.9	581	33.5	612	31.8	587	33.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M
 Processor CPU C-States Enabled

Base Compiler Invocation

C benchmarks:
 icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.7

IBM System x3650 M2 (Intel Xeon E5530)

SPECfp_base2006 = 30.9

CPU2006 license: 11

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.7

IBM System x3650 M2 (Intel Xeon E5530)

SPECfp_base2006 = 30.9

CPU2006 license: 11

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.7

IBM System x3650 M2 (Intel Xeon E5530)

SPECfp_base2006 = 30.9

CPU2006 license: 11

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll12 -ansi-alias -scalar-rep -opt-prefetch
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll14 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
            -parallel
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll12 -Ob0 -ansi-alias -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -unroll12 -Ob0 -opt-prefetch -parallel
```

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll14 -auto
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32
```

```
436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                 -unroll12 -opt-prefetch -parallel -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.7

IBM System x3650 M2 (Intel Xeon E5530)

SPECfp_base2006 = 30.9

CPU2006 license: 11

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 02:21:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 July 2009.