



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23E  
(Intel Xeon E5-2418L, 2.00 GHz)

**SPECint®2006 = 31.8**

**SPECint\_base2006 = 30.1**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

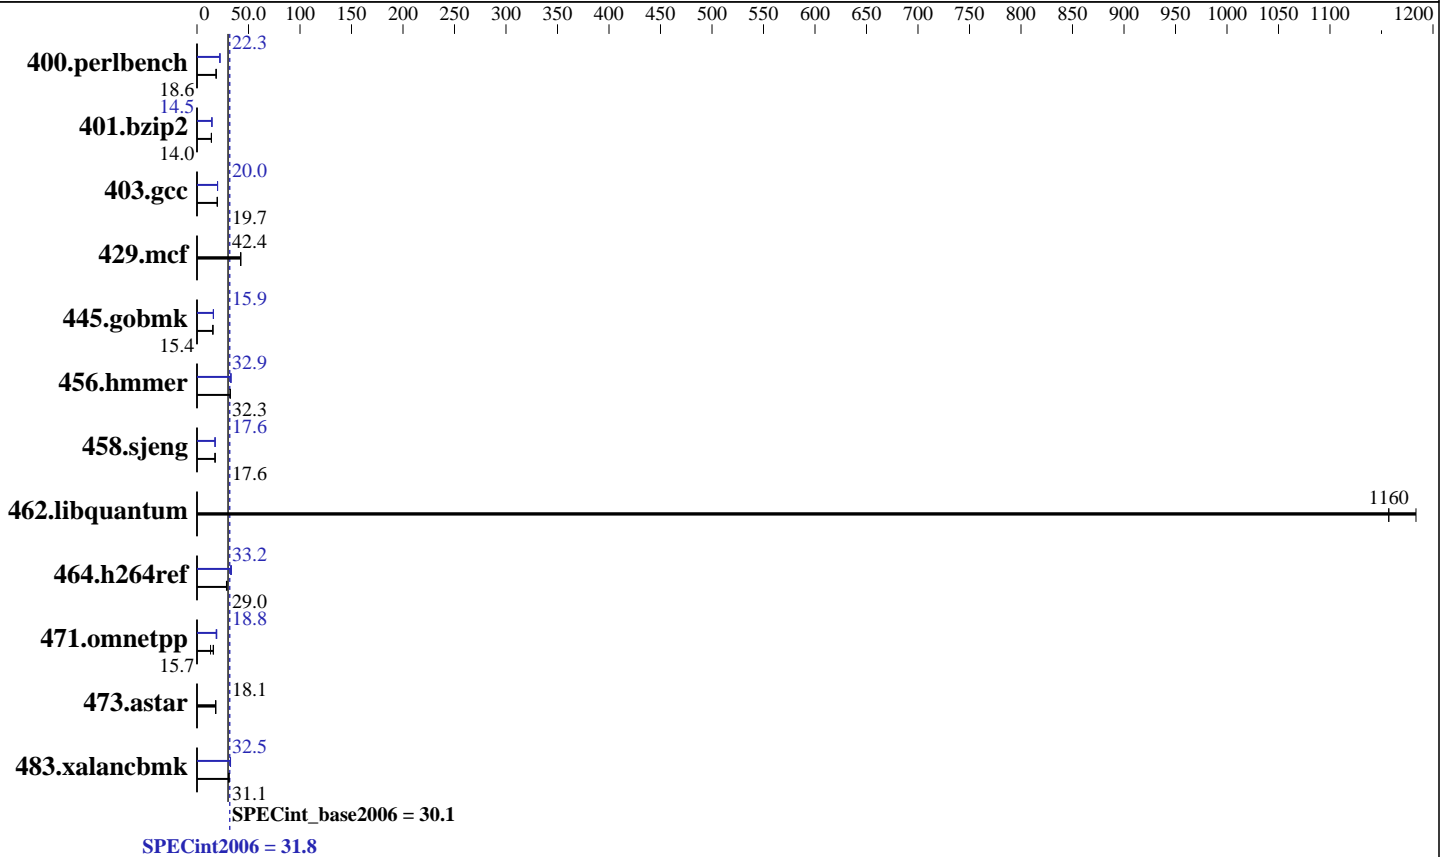

### Hardware

CPU Name: Intel Xeon E5-2418L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23E  
(Intel Xeon E5-2418L, 2.00 GHz)

SPECint2006 = **31.8**

SPECint\_base2006 = **30.1**

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	525	18.6	<u>525</u>	<u>18.6</u>	526	18.6	439	22.3	<u>439</u>	<u>22.3</u>	440	22.2
401.bzip2	691	14.0	689	14.0	<u>689</u>	<u>14.0</u>	668	14.5	<u>667</u>	<u>14.5</u>	666	14.5
403.gcc	<u>409</u>	<u>19.7</u>	408	19.7	409	19.7	<u>403</u>	<u>20.0</u>	403	20.0	404	19.9
429.mcf	<u>215</u>	<u>42.4</u>	215	42.4	215	42.4	<u>215</u>	<u>42.4</u>	215	42.4	215	42.4
445.gobmk	682	15.4	<u>680</u>	<u>15.4</u>	680	15.4	659	15.9	658	15.9	<u>658</u>	<u>15.9</u>
456.hammer	289	32.3	289	32.3	<u>289</u>	<u>32.3</u>	283	32.9	283	32.9	<u>283</u>	<u>32.9</u>
458.sjeng	689	17.6	690	17.5	<u>689</u>	<u>17.6</u>	689	17.6	<u>689</u>	<u>17.6</u>	690	17.5
462.libquantum	17.5	1180	<u>17.9</u>	<u>1160</u>	17.9	1160	17.5	1180	<u>17.9</u>	<u>1160</u>	17.9	1160
464.h264ref	<u>764</u>	<u>29.0</u>	764	29.0	774	28.6	663	33.4	678	32.6	<u>666</u>	<u>33.2</u>
471.omnetpp	475	13.2	390	16.0	<u>399</u>	<u>15.7</u>	325	19.2	<u>333</u>	<u>18.8</u>	334	18.7
473.astar	389	18.1	385	18.2	<u>387</u>	<u>18.1</u>	389	18.1	385	18.2	<u>387</u>	<u>18.1</u>
483.xalancbmk	<u>222</u>	<u>31.1</u>	224	30.7	222	31.1	212	32.6	<u>212</u>	<u>32.5</u>	213	32.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on anglleshark-pete Sun Jul 1 05:47:27 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2418L 0 @ 2.00GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

From /proc/meminfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint2006 = 31.8**

IBM BladeCenter HS23E  
(Intel Xeon E5-2418L, 2.00 GHz)

**SPECint\_base2006 = 30.1**

**CPU2006 license:** 11

**Test date:** Jul-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jun-2012

**Tested by:** IBM Corporation

**Software Availability:** Dec-2011

## Platform Notes (Continued)

MemTotal: 99043316 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
/usr/bin/lsc_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux angleshark-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 29 13:37
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_angularsharkpet-lv_root
                ext4      265G  36G  217G  15% /
```

Additional information from dmidecode:

```
Memory:
6x Micron 36JDYS1G72PZ-1G6M1 8 GB 1600 MHz 2 rank
6x Samsung M392B1K70DM0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"
OMP_NUM_THREADS = "8"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23E  
(Intel Xeon E5-2418L, 2.00 GHz)

**SPECint2006 = 31.8**

**SPECint\_base2006 = 30.1**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint2006 = 31.8**

IBM BladeCenter HS23E  
(Intel Xeon E5-2418L, 2.00 GHz)

**SPECint\_base2006 = 30.1**

**CPU2006 license:** 11

**Test date:** Jul-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jun-2012

**Tested by:** IBM Corporation

**Software Availability:** Dec-2011

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias
              -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23E  
(Intel Xeon E5-2418L, 2.00 GHz)

**SPECint2006 = 31.8**

**SPECint\_base2006 = 30.1**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 10:12:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 July 2012.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 6