



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®_rate2006 = 137

Express5800/R110f-1E (Intel Xeon E3-1220 v3)

SPECfp_rate_base2006 = 134

CPU2006 license: 9006


Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

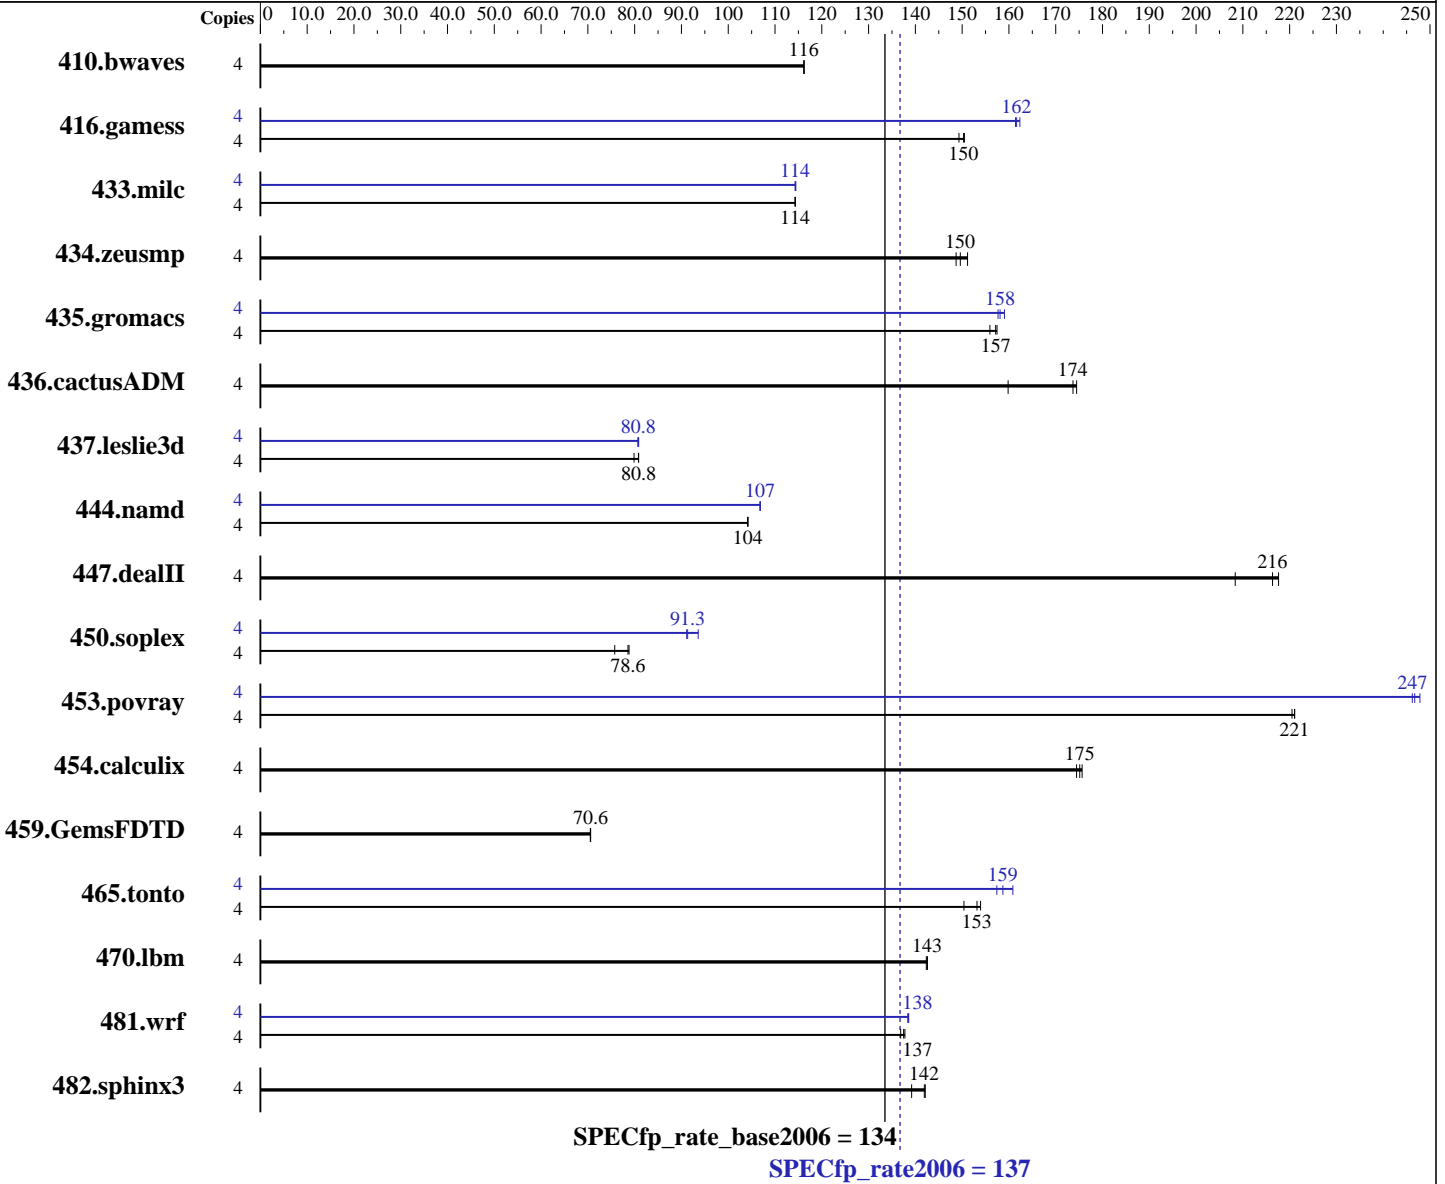

Hardware

CPU Name: Intel Xeon E3-1220 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux;
 Fortran: Version 13.1.1.163 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 137

Express5800/R110f-1E (Intel Xeon E3-1220 v3)

SPECfp_rate_base2006 = 134

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	468	116	468	116	468	116	4	468	116	468	116	468	116
416.gamess	4	520	150	525	149	521	150	4	482	162	485	162	485	161
433.milc	4	321	114	321	114	321	114	4	321	114	321	114	321	114
434.zeusmp	4	245	149	243	150	241	151	4	245	149	243	150	241	151
435.gromacs	4	181	157	182	157	183	156	4	181	158	181	158	180	159
436.cactusADM	4	299	160	274	174	275	174	4	299	160	274	174	275	174
437.leslie3d	4	465	80.8	465	80.8	471	79.9	4	466	80.7	465	80.8	465	80.9
444.namd	4	308	104	308	104	308	104	4	300	107	300	107	300	107
447.dealII	4	212	216	210	218	220	208	4	212	216	210	218	220	208
450.soplex	4	425	78.6	423	78.8	440	75.7	4	356	93.6	365	91.3	366	91.1
453.povray	4	96.3	221	96.3	221	96.5	221	4	86.2	247	86.4	246	85.9	248
454.calculix	4	188	176	188	175	189	174	4	188	176	188	175	189	174
459.GemsFDTD	4	601	70.6	602	70.5	601	70.6	4	601	70.6	602	70.5	601	70.6
465.tonto	4	262	150	257	153	256	154	4	245	161	250	157	248	159
470.lbm	4	386	142	386	143	386	143	4	386	142	386	143	386	143
481.wrf	4	325	137	326	137	324	138	4	323	138	323	138	322	139
482.sphinx3	4	549	142	560	139	549	142	4	549	142	560	139	549	142

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 137

Express5800/R110f-1E (Intel Xeon E3-1220 v3)

SPECfp_rate_base2006 = 134

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Added glibc-static-2.12-1.107.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 137

Express5800/R110f-1E (Intel Xeon E3-1220 v3)

SPECfp_rate_base2006 = 134

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 137

Express5800/R110f-1E (Intel Xeon E3-1220 v3)

SPECfp_rate_base2006 = 134

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -static
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 137

Express5800/R110f-1E (Intel Xeon E3-1220 v3)

SPECfp_rate_base2006 = 134

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:19:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 August 2013.