



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

**SPECint®\_rate2006 = 157**

ACTINA SOLAR 110 X5 (Intel Xeon E3-1220 v2)

**SPECint\_rate\_base2006 = 152**

CPU2006 license: 9008


Test date: Jul-2013

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Jun-2013

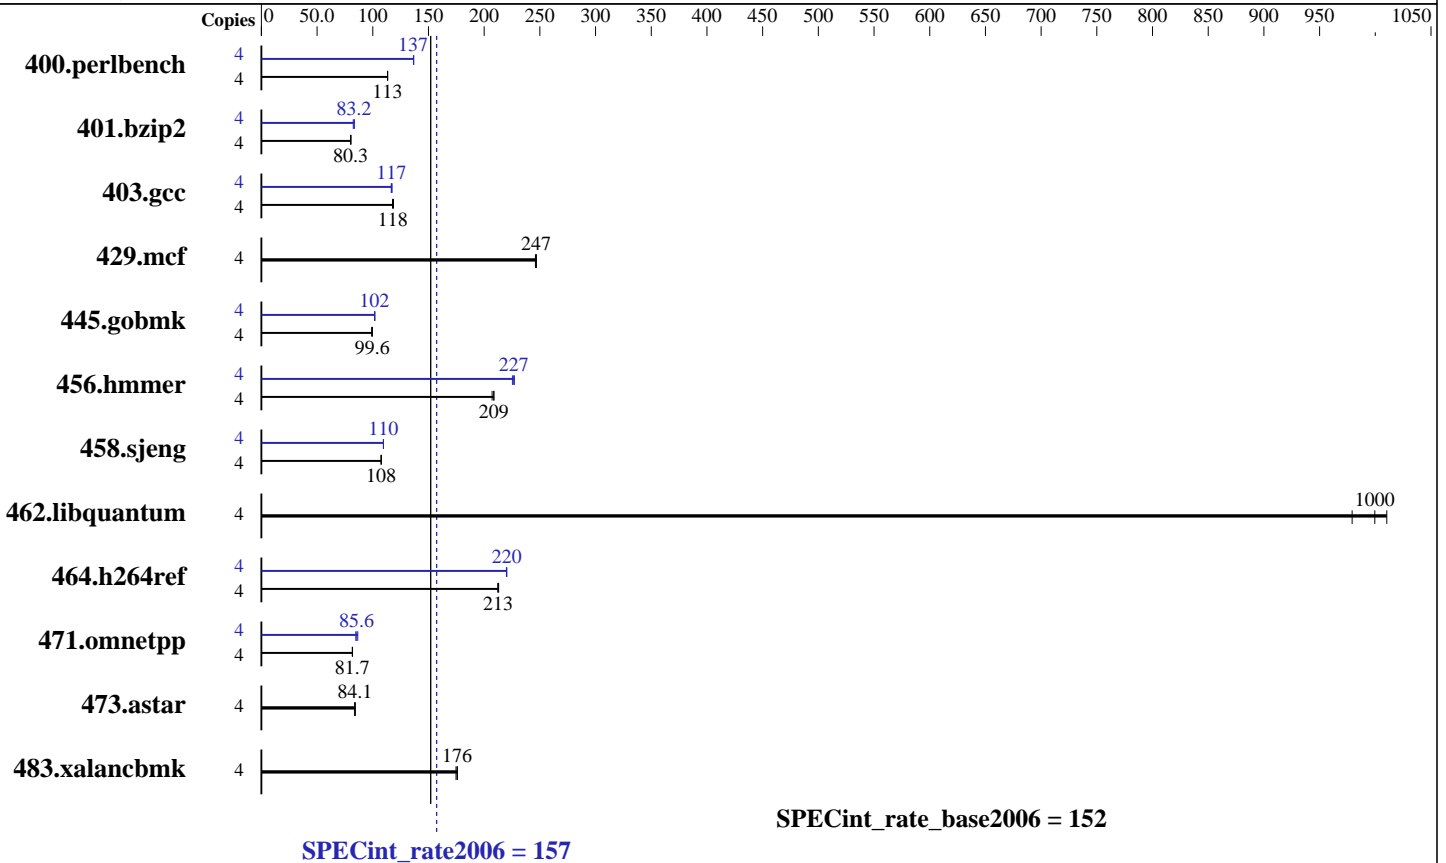

### Hardware

CPU Name: Intel Xeon E3-1220 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4 x 4 GB 1Rx8 PC3-12800E-11, ECC)  
 Disk Subsystem: 240 GB OCZ Deneva2 SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 13.1.1.163 of Intel Compiler XE Build 20130313  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECint\_rate2006 = 157

ACTINA SOLAR 110 X5 (Intel Xeon E3-1220 v2)

SPECint\_rate\_base2006 = 152

CPU2006 license: 9008  
Test sponsor: ACTION S.A.  
Tested by: ACTION S.A.

Test date: Jul-2013  
Hardware Availability: May-2012  
Software Availability: Jun-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	345	113	<b>345</b>	<b>113</b>	345	113	4	<b>286</b>	<b>137</b>	286	137	286	137
401.bzip2	4	<b>481</b>	<b>80.3</b>	480	80.4	482	80.0	4	463	83.5	<b>464</b>	<b>83.2</b>	468	82.5
403.gcc	4	272	119	273	118	<b>273</b>	<b>118</b>	4	274	117	<b>276</b>	<b>117</b>	276	117
429.mcf	4	148	246	<b>148</b>	<b>247</b>	148	247	4	148	246	<b>148</b>	<b>247</b>	148	247
445.gobmk	4	421	99.6	424	99.0	<b>421</b>	<b>99.6</b>	4	<b>413</b>	<b>102</b>	413	102	412	102
456.hammer	4	180	207	179	209	<b>179</b>	<b>209</b>	4	166	225	<b>165</b>	<b>227</b>	164	227
458.sjeng	4	<b>450</b>	<b>108</b>	450	108	450	108	4	442	110	<b>442</b>	<b>110</b>	442	110
462.libquantum	4	82.0	1010	84.6	979	<b>82.9</b>	<b>1000</b>	4	82.0	1010	84.6	979	<b>82.9</b>	<b>1000</b>
464.h264ref	4	<b>416</b>	<b>213</b>	417	212	416	213	4	402	220	<b>402</b>	<b>220</b>	402	220
471.omnetpp	4	306	81.8	306	81.6	<b>306</b>	<b>81.7</b>	4	289	86.5	<b>292</b>	<b>85.6</b>	295	84.8
473.astar	4	<b>334</b>	<b>84.1</b>	335	83.7	333	84.2	4	<b>334</b>	<b>84.1</b>	335	83.7	333	84.2
483.xalancbmk	4	<b>157</b>	<b>176</b>	157	176	158	175	4	<b>157</b>	<b>176</b>	157	176	158	175

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Wed Jul 10 22:00:58 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E3-1220 V2 @ 3.10GHz  
1 "physical id"s (chips)  
4 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 4  
siblings : 4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 157**

**ACTINA SOLAR 110 X5 (Intel Xeon E3-1220 v2)**

**SPECint\_rate\_base2006 = 152**

**CPU2006 license:** 9008

**Test date:** Jul-2013

**Test sponsor:** ACTION S.A.

**Hardware Availability:** May-2012

**Tested by:** ACTION S.A.

**Software Availability:** Jun-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      16304836 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 7 23:43
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4      197G   36G  152G  20% /
```

```
Additional information from dmidecode:
BIOS American Megatrends Inc. 2.0b 10/04/2012
Memory:
4x 4 GB
4x 075D MEM1600E34G 4 GB 1600 MHz 1 rank
1x Winbond 25X/Q Series 8 MB
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Binaries compiled on a system with 1x E3-1220 V2 CPU + 16GB  
memory using RHEL6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 157**

**ACTINA SOLAR 110 X5 (Intel Xeon E3-1220 v2)**

**SPECint\_rate\_base2006 = 152**

**CPU2006 license:** 9008

**Test date:** Jul-2013

**Test sponsor:** ACTION S.A.

**Hardware Availability:** May-2012

**Tested by:** ACTION S.A.

**Software Availability:** Jun-2013

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 157**

**ACTINA SOLAR 110 X5 (Intel Xeon E3-1220 v2)**

**SPECint\_rate\_base2006 = 152**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Jul-2013

**Hardware Availability:** May-2012

**Software Availability:** Jun-2013

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 157**

**ACTINA SOLAR 110 X5 (Intel Xeon E3-1220 v2)**

**SPECint\_rate\_base2006 = 152**

**CPU2006 license:** 9008

**Test date:** Jul-2013

**Test sponsor:** ACTION S.A.

**Hardware Availability:** May-2012

**Tested by:** ACTION S.A.

**Software Availability:** Jun-2013

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/ActionSA-ic13.1-official-linux64\\_1.html](http://www.spec.org/cpu2006/flags/ActionSA-ic13.1-official-linux64_1.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/ActionSA-ic13.1-official-linux64\\_1.xml](http://www.spec.org/cpu2006/flags/ActionSA-ic13.1-official-linux64_1.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:47:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 September 2013.