



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1R  
(X10DRH-C , Intel Xeon E5-2643 v3)

SPECfp®2006 = 115

SPECfp\_base2006 = 111

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Nov-2014

Software Availability: Sep-2014

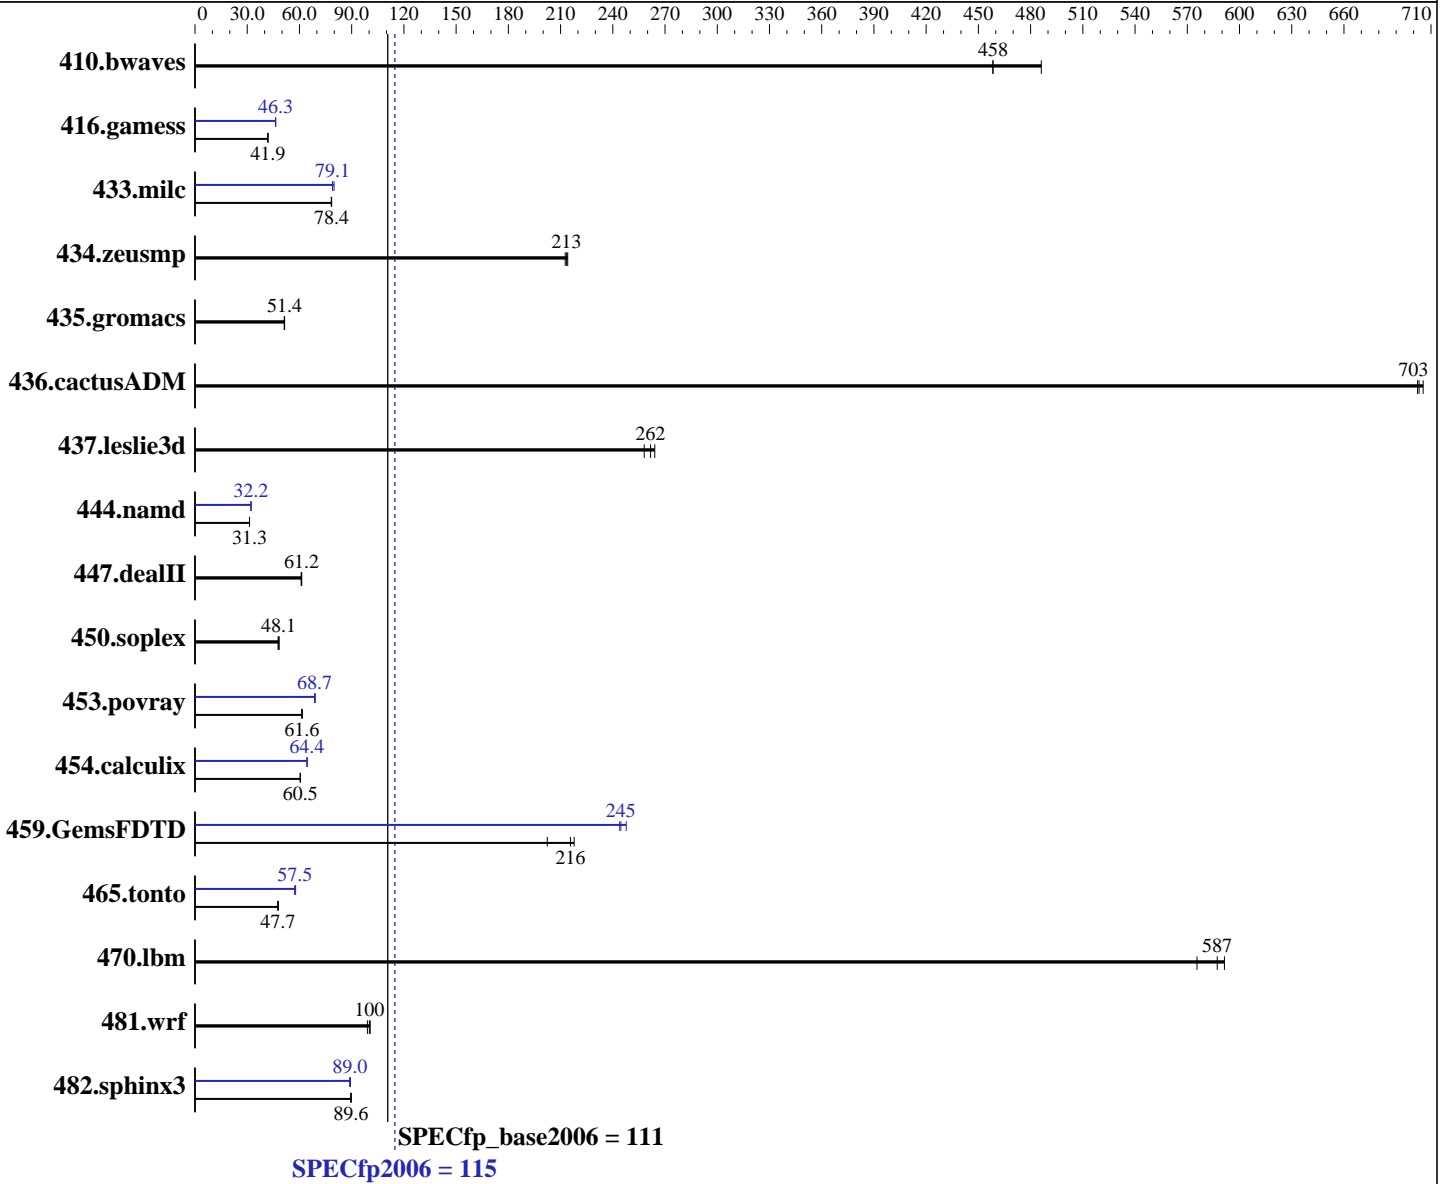

**Hardware**

CPU Name: Intel Xeon E5-2643 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

**Software**

Operating System: Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1R  
(X10DRH-C , Intel Xeon E5-2643 v3)

SPECfp2006 = **115**

SPECfp\_base2006 = **111**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Nov-2014

Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>29.6</u></b>	<b><u>458</u></b>	29.7	458	28.0	486	<b><u>29.6</u></b>	<b><u>458</u></b>	29.7	458	28.0	486
416.gamess	467	41.9	468	41.8	<b><u>467</u></b>	<b><u>41.9</u></b>	423	46.3	422	46.4	<b><u>423</u></b>	<b><u>46.3</u></b>
433.milc	117	78.5	<b><u>117</u></b>	<b><u>78.4</u></b>	117	78.3	115	79.9	<b><u>116</u></b>	<b><u>79.1</u></b>	116	79.0
434.zeusmp	<b><u>42.6</u></b>	<b><u>213</u></b>	42.5	214	42.8	213	<b><u>42.6</u></b>	<b><u>213</u></b>	42.5	214	42.8	213
435.gromacs	139	51.5	<b><u>139</u></b>	<b><u>51.4</u></b>	139	51.2	139	51.5	<b><u>139</u></b>	<b><u>51.4</u></b>	139	51.2
436.cactusADM	16.9	705	17.0	702	<b><u>17.0</u></b>	<b><u>703</u></b>	16.9	705	17.0	702	<b><u>17.0</u></b>	<b><u>703</u></b>
437.leslie3d	36.4	258	<b><u>35.9</u></b>	<b><u>262</u></b>	35.6	264	36.4	258	<b><u>35.9</u></b>	<b><u>262</u></b>	35.6	264
444.namd	256	31.3	256	31.3	<b><u>256</u></b>	<b><u>31.3</u></b>	<b><u>249</u></b>	<b><u>32.2</u></b>	249	32.1	249	32.2
447.dealII	<b><u>187</u></b>	<b><u>61.2</u></b>	188	61.0	187	61.3	<b><u>187</u></b>	<b><u>61.2</u></b>	188	61.0	187	61.3
450.soplex	173	48.3	<b><u>173</u></b>	<b><u>48.1</u></b>	175	47.7	173	48.3	<b><u>173</u></b>	<b><u>48.1</u></b>	175	47.7
453.povray	86.8	61.3	<b><u>86.4</u></b>	<b><u>61.6</u></b>	86.4	61.6	77.0	69.1	77.5	68.7	<b><u>77.5</u></b>	<b><u>68.7</u></b>
454.calculix	<b><u>136</u></b>	<b><u>60.5</u></b>	136	60.6	137	60.4	128	64.3	128	64.4	<b><u>128</u></b>	<b><u>64.4</u></b>
459.GemsFDTD	<b><u>49.2</u></b>	<b><u>216</u></b>	52.4	202	48.7	218	<b><u>43.4</u></b>	<b><u>245</u></b>	43.5	244	42.8	248
465.tonto	<b><u>206</u></b>	<b><u>47.7</u></b>	207	47.6	205	47.9	172	57.3	<b><u>171</u></b>	<b><u>57.5</u></b>	170	57.8
470.lbm	23.2	591	<b><u>23.4</u></b>	<b><u>587</u></b>	23.9	576	23.2	591	<b><u>23.4</u></b>	<b><u>587</u></b>	23.9	576
481.wrf	113	99.0	<b><u>112</u></b>	<b><u>100</u></b>	111	101	113	99.0	<b><u>112</u></b>	<b><u>100</u></b>	111	101
482.sphinx3	217	89.8	218	89.4	<b><u>218</u></b>	<b><u>89.6</u></b>	<b><u>219</u></b>	<b><u>89.0</u></b>	219	88.8	218	89.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Enforce POR = Disable  
Memory Frequency = 2133  
Hyper-Threading (ALL) = Disable



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1R  
(X10DRH-C , Intel Xeon E5-2643 v3)

SPECfp2006 = 115

SPECfp\_base2006 = 111

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Nov-2014

Software Availability: Sep-2014

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

450.soplex: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main

459.GemsFDTD: -DSPEC\_CPU\_LP64

465.tonto: -DSPEC\_CPU\_LP64

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1R  
(X10DRH-C , Intel Xeon E5-2643 v3)

SPECfp2006 = 115

SPECfp\_base2006 = 111

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Dec-2014  
Hardware Availability: Nov-2014  
Software Availability: Sep-2014

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1R  
(X10DRH-C , Intel Xeon E5-2643 v3)

SPECfp2006 = 115

SPECfp\_base2006 = 111

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Nov-2014

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.html>

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1R  
(X10DRH-C , Intel Xeon E5-2643 v3)

**SPECfp2006 = 115**

**SPECfp\_base2006 = 111**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Dec-2014

**Hardware Availability:** Nov-2014

**Software Availability:** Sep-2014

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jan 14 10:25:33 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 January 2015.