



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR G 240 S6+ (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp®_rate2006 = 697

SPECfp_rate_base2006 = 680

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2015

Hardware Availability: Sep-2014

Software Availability: Oct-2014

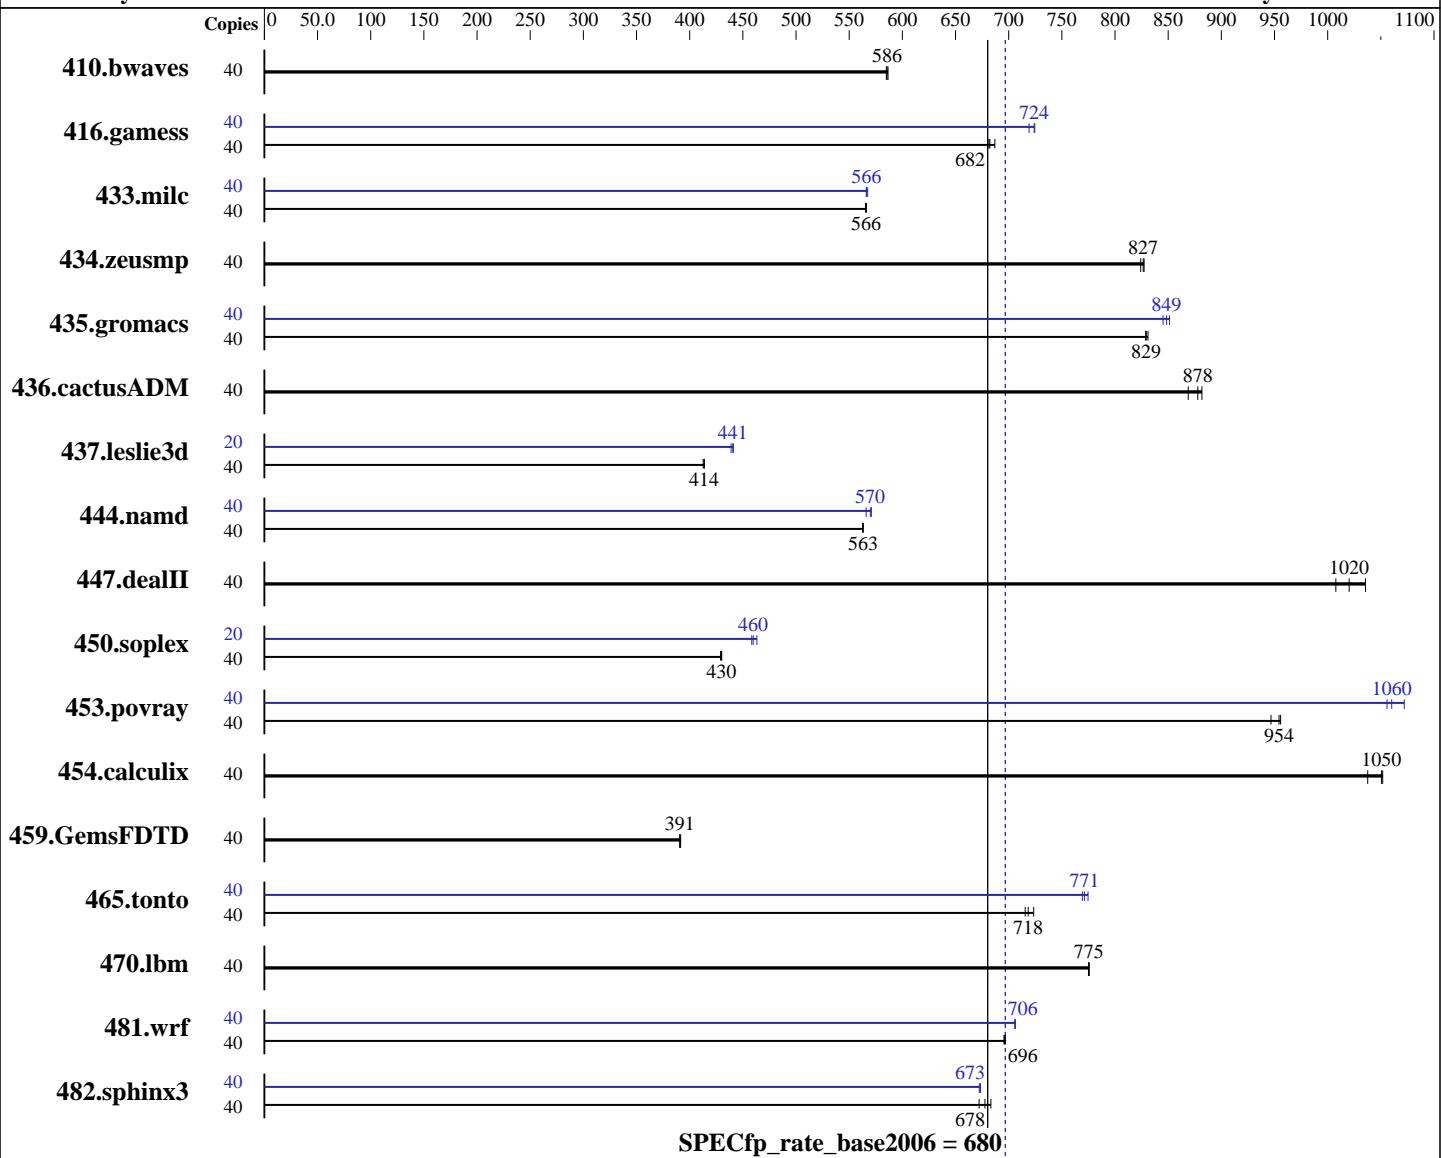

Hardware

CPU Name: Intel Xeon E5-2650 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz: 2300
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
Compiler: 2.6.32-504.8.1.el6.x86_64
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR G 240 S6+ (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 697

SPECfp_rate_base2006 = 680

CPU2006 license: 9008

Test date: Apr-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Oct-2014

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	928	586	927	587	929	585	40	928	586	927	587	929	585
416.gamess	40	1148	682	1140	687	1149	681	40	1081	725	1089	719	1082	724
433.milc	40	650	565	649	566	648	566	40	648	566	647	567	649	566
434.zeusmp	40	442	824	440	827	440	827	40	442	824	440	827	440	827
435.gromacs	40	344	831	344	829	345	829	40	336	851	337	849	338	845
436.cactusADM	40	545	878	542	882	550	869	40	545	878	542	882	550	869
437.leslie3d	40	909	414	911	413	909	414	20	428	439	426	441	427	441
444.namd	40	570	563	570	563	570	563	40	562	571	563	570	567	566
447.dealII	40	449	1020	454	1010	442	1040	40	449	1020	454	1010	442	1040
450.soplex	40	778	429	776	430	776	430	20	360	463	364	458	363	460
453.povray	40	223	956	225	947	223	954	40	198	1070	202	1060	201	1060
454.calculix	40	314	1050	318	1040	314	1050	40	314	1050	318	1040	314	1050
459.GemsFDTD	40	1084	391	1086	391	1086	391	40	1084	391	1086	391	1086	391
465.tonto	40	544	724	548	718	550	716	40	508	775	512	769	510	771
470.lbm	40	709	775	709	775	708	776	40	709	775	709	775	708	776
481.wrf	40	642	696	642	696	641	697	40	633	706	633	706	633	706
482.sphinx3	40	1150	678	1141	683	1160	672	40	1158	673	1159	672	1158	673

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings

Power Technology = Energy Efficient

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR G 240 S6+ (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 697

SPECfp_rate_base2006 = 680

CPU2006 license: 9008

Test date: Apr-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Oct-2014

Platform Notes (Continued)

Enforce POR = Disabled
COD Enable = Enable

BMC Setting
Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191
running on SUT Sat Apr 11 04:00:03 2015

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz
2 "physical id"s (chips)
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 12800 KB

From /proc/meminfo
MemTotal: 264431916 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.6 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux SUT 2.6.32-504.8.1.el6.x86_64 #1 SMP Wed Mar 11 12:12:13 CET 2015
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 10 16:30

SPEC is set to: /cpu2006.1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext4 212G 37G 165G 18% /

Additional information from dmidecode:
BIOS American Megatrends Inc. 1.0c 02/12/2015
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR G 240 S6+ (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 697

SPECfp_rate_base2006 = 680

CPU2006 license: 9008

Test date: Apr-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Oct-2014

Platform Notes (Continued)

Memory:

```
16x 16 GB
2x Samsung(date:14/33) M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
14x Samsung(date:14/40) M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)

dmidecode does not properly detect memory modules
16 modules of 16 GB were used to run the test (256 GB total)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory
using RedHat EL 6.6

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
        434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR G 240 S6+ (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 697

SPECfp_rate_base2006 = 680

CPU2006 license: 9008

Test date: Apr-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Oct-2014

Base Portability Flags (Continued)

```
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR G 240 S6+ (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 697

SPECfp_rate_base2006 = 680

CPU2006 license: 9008

Test date: Apr-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Oct-2014

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
    -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
    -unroll12

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
    -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
    -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
    -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR G 240 S6+ (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 697

SPECfp_rate_base2006 = 680

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2015

Hardware Availability: Sep-2014

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR G 240 S6+ (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 697

SPECfp_rate_base2006 = 680

CPU2006 license: 9008

Test date: Apr-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Oct-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 19 18:11:47 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 May 2015.