



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 1630

PowerEdge FC830 (Intel Xeon E5-4667 v3, 2.00 GHz)

SPECfp_rate_base2006 = 1580

CPU2006 license: 55


Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

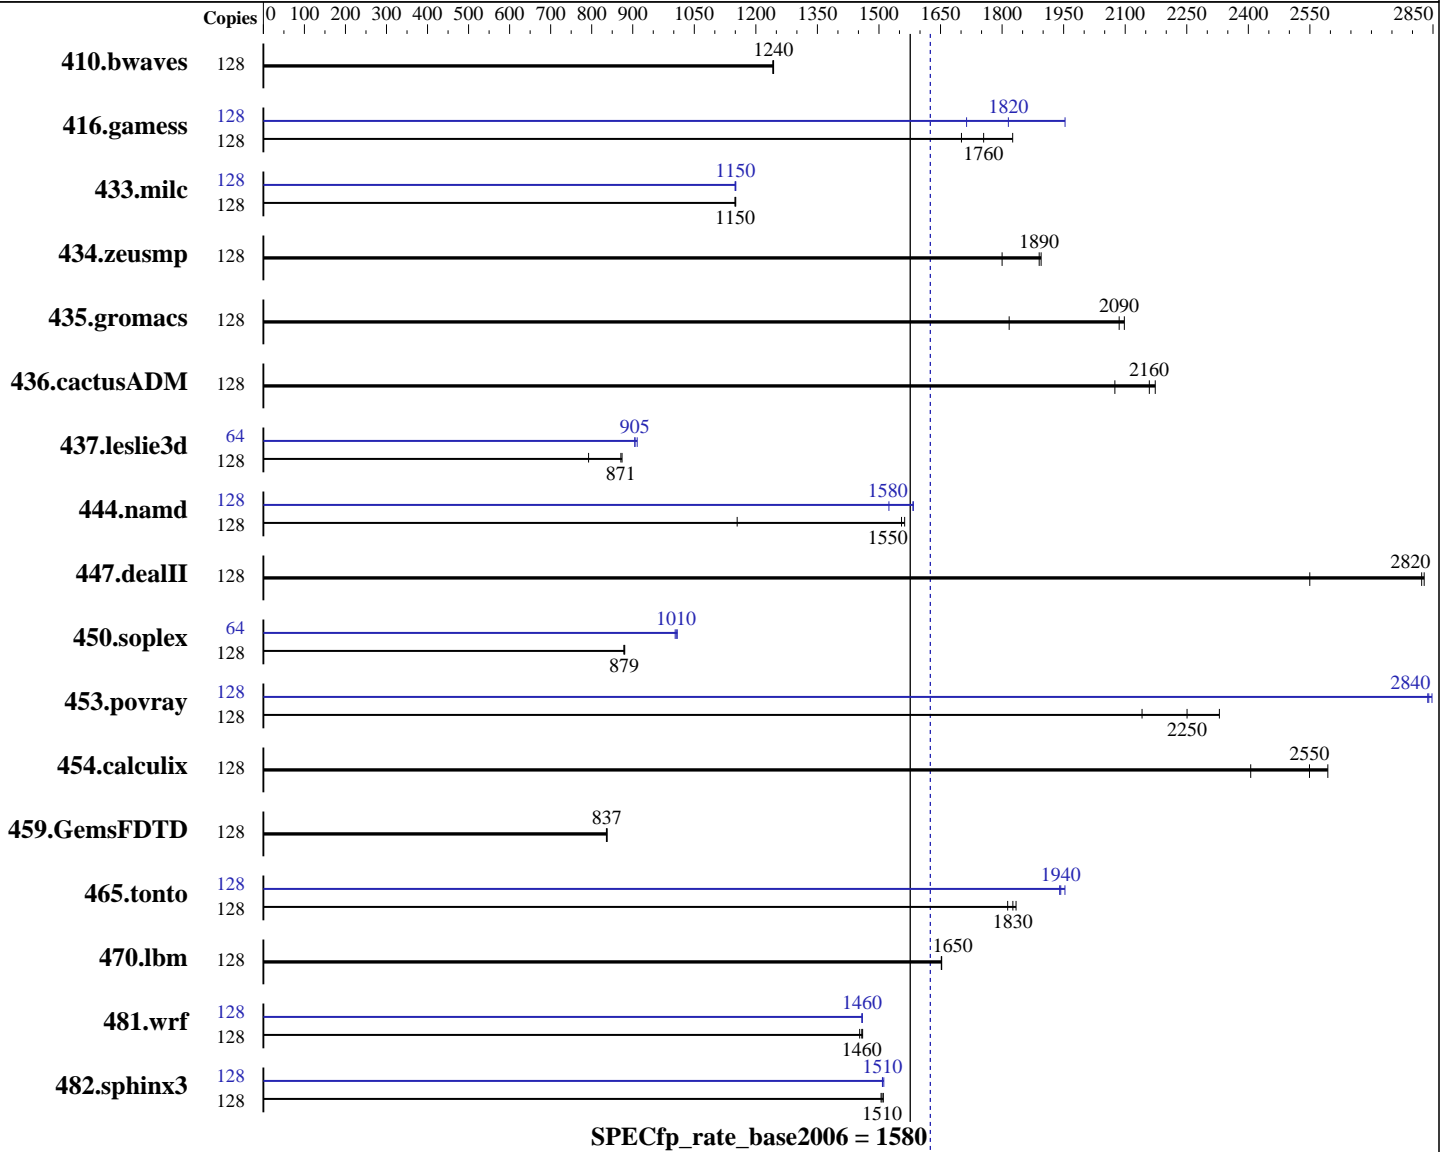

Hardware

CPU Name: Intel Xeon E5-4667 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1630

PowerEdge FC830 (Intel Xeon E5-4667 v3, 2.00 GHz)

SPECfp_rate_base2006 = 1580

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

L3 Cache: 40 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 400 GB 7200 RPM SATA
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1401	1240	<u>1399</u>	<u>1240</u>	1399	1240	128	1401	1240	<u>1399</u>	<u>1240</u>	1399	1240
416.gamess	128	<u>1428</u>	<u>1760</u>	1373	1830	1473	1700	128	<u>1381</u>	<u>1820</u>	1463	1710	1283	1950
433.milc	128	1021	1150	<u>1022</u>	<u>1150</u>	1022	1150	128	<u>1022</u>	<u>1150</u>	1022	1150	1021	1150
434.zeusmp	128	615	1900	<u>616</u>	<u>1890</u>	647	1800	128	615	1900	<u>616</u>	<u>1890</u>	647	1800
435.gromacs	128	<u>438</u>	<u>2090</u>	436	2100	503	1820	128	<u>438</u>	<u>2090</u>	436	2100	503	1820
436.cactusADM	128	<u>709</u>	<u>2160</u>	704	2170	737	2070	128	<u>709</u>	<u>2160</u>	704	2170	737	2070
437.leslie3d	128	<u>1381</u>	<u>871</u>	1377	874	1518	792	64	<u>665</u>	<u>905</u>	665	905	660	911
444.namd	128	657	1560	<u>660</u>	<u>1550</u>	889	1150	128	<u>649</u>	<u>1580</u>	648	1580	673	1520
447.dealII	128	518	2830	<u>519</u>	<u>2820</u>	574	2550	128	518	2830	<u>519</u>	<u>2820</u>	574	2550
450.soplex	128	<u>1214</u>	<u>879</u>	1212	881	1215	879	64	532	1000	<u>531</u>	<u>1010</u>	529	1010
453.povray	128	<u>303</u>	<u>2250</u>	318	2140	292	2330	128	<u>240</u>	<u>2840</u>	239	2850	240	2840
454.calculix	128	<u>414</u>	<u>2550</u>	439	2410	407	2590	128	<u>414</u>	<u>2550</u>	439	2410	407	2590
459.GemsFDTD	128	1625	836	<u>1622</u>	<u>837</u>	1622	837	128	1625	836	<u>1622</u>	<u>837</u>	1622	837
465.tonto	128	687	1830	694	1810	<u>690</u>	<u>1830</u>	128	<u>648</u>	<u>1940</u>	645	1950	649	1940
470.lbm	128	<u>1064</u>	<u>1650</u>	1065	1650	1064	1650	128	<u>1064</u>	<u>1650</u>	1065	1650	1064	1650
481.wrf	128	<u>981</u>	<u>1460</u>	984	1450	979	1460	128	980	1460	<u>980</u>	<u>1460</u>	980	1460
482.sphinx3	128	<u>1655</u>	<u>1510</u>	1657	1510	1651	1510	128	<u>1654</u>	<u>1510</u>	1650	1510	1654	1510

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Snoop Mode set to Early Snoop
Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1630

PowerEdge FC830 (Intel Xeon E5-4667 v3, 2.00 GHz)

SPECfp_rate_base2006 = 1580

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Platform Notes (Continued)

System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1
running on linux-3aq4 Wed Feb 4 16:26:00 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4667 v3 @ 2.00GHz
 4 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 40960 KB
```

```
From /proc/meminfo
MemTotal: 529334376 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-3aq4 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1630

PowerEdge FC830 (Intel Xeon E5-4667 v3, 2.00 GHz)

SPECfp_rate_base2006 = 1580

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Platform Notes (Continued)

run-level 3 Feb 4 02:07 last=5

SPEC is set to: /root/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	267G	11G	256G	4%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.0 01/08/2015

Memory:

32x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

16x Not Specified Not Specified

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1630

PowerEdge FC830 (Intel Xeon E5-4667 v3, 2.00 GHz)

SPECfp_rate_base2006 = 1580

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1630

PowerEdge FC830 (Intel Xeon E5-4667 v3, 2.00 GHz)

SPECfp_rate_base2006 = 1580

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
 -unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1630

PowerEdge FC830 (Intel Xeon E5-4667 v3, 2.00 GHz)

SPECfp_rate_base2006 = 1580

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1630

PowerEdge FC830 (Intel Xeon E5-4667 v3, 2.00 GHz)

SPECfp_rate_base2006 = 1580

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 12:38:24 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.