



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 570

Huawei CH121 V3 (Intel Xeon E5-2618L v3)

SPECfp_rate_base2006 = 556

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Mar-2015

Software Availability: Sep-2014

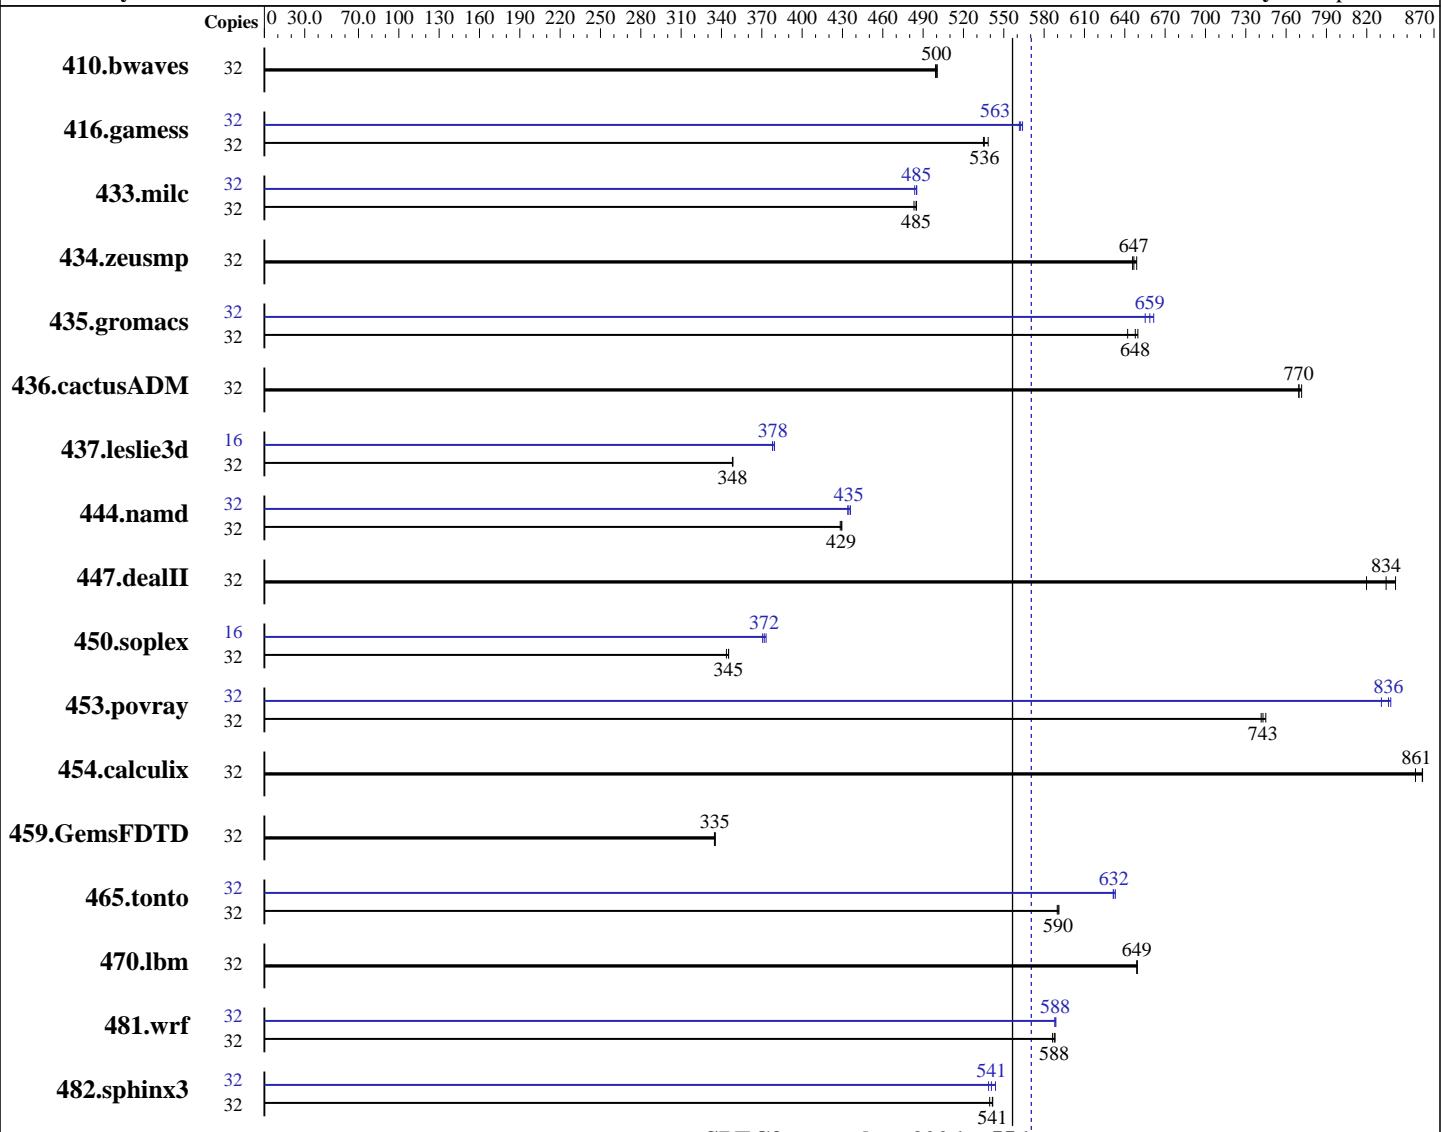

SPECfp_rate_base2006 = 556

SPECfp_rate2006 = 570

Hardware

CPU Name: Intel Xeon E5-2618L v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz: 2300
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
Compiler: 3.10.0-123.el7.x86_64
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 570

Huawei CH121 V3 (Intel Xeon E5-2618L v3)

SPECfp_rate_base2006 = 556

CPU2006 license: 3175

Test date: May-2015

Test sponsor: Huawei

Hardware Availability: Mar-2015

Tested by: Huawei

Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	869	501	<u>870</u>	<u>500</u>	871	499	32	869	501	<u>870</u>	<u>500</u>	871	499		
416.gamess	32	1171	535	1164	538	<u>1170</u>	<u>536</u>	32	1111	564	<u>1114</u>	<u>563</u>	1116	562		
433.milc	32	608	483	606	485	<u>606</u>	<u>485</u>	32	605	485	<u>606</u>	<u>485</u>	607	484		
434.zeusmp	32	451	646	449	649	<u>450</u>	<u>647</u>	32	451	646	449	649	<u>450</u>	<u>647</u>		
435.gromacs	32	356	642	352	650	<u>353</u>	<u>648</u>	32	349	655	<u>347</u>	<u>659</u>	345	662		
436.cactusADM	32	<u>497</u>	<u>770</u>	496	772	497	769	32	<u>497</u>	<u>770</u>	496	772	<u>497</u>	<u>769</u>		
437.leslie3d	32	<u>864</u>	<u>348</u>	864	348	863	349	16	<u>398</u>	<u>378</u>	396	379	398	378		
444.namd	32	597	430	599	428	<u>598</u>	<u>429</u>	32	<u>590</u>	<u>435</u>	591	434	589	436		
447.dealII	32	447	820	<u>439</u>	<u>834</u>	435	841	32	447	820	<u>439</u>	<u>834</u>	435	841		
450.soplex	32	773	345	777	344	<u>773</u>	<u>345</u>	16	<u>359</u>	<u>372</u>	360	371	358	373		
453.povray	32	229	745	<u>229</u>	<u>743</u>	230	741	32	203	838	205	831	<u>204</u>	<u>836</u>		
454.calculix	32	308	856	306	861	<u>307</u>	<u>861</u>	32	308	856	306	861	<u>307</u>	<u>861</u>		
459.GemsFDTD	32	1014	335	<u>1013</u>	<u>335</u>	1012	335	32	1014	335	<u>1013</u>	<u>335</u>	1012	335		
465.tonto	32	533	591	<u>533</u>	<u>590</u>	534	590	32	<u>498</u>	<u>632</u>	499	631	497	633		
470.lbm	32	<u>677</u>	<u>649</u>	677	649	677	649	32	<u>677</u>	<u>649</u>	677	649	677	649		
481.wrf	32	608	588	<u>608</u>	<u>588</u>	610	586	32	<u>608</u>	<u>588</u>	608	588	607	589		
482.sphinx3	32	1151	542	<u>1152</u>	<u>541</u>	1156	540	32	<u>1147</u>	<u>544</u>	1158	539	<u>1153</u>	<u>541</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Set Snoop Mode to ES

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 570

Huawei CH121 V3 (Intel Xeon E5-2618L v3)

SPECfp_rate_base2006 = 556

CPU2006 license: 3175

Test date: May-2015

Test sponsor: Huawei

Hardware Availability: Mar-2015

Tested by: Huawei

Software Availability: Sep-2014

Platform Notes (Continued)

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Sat May 16 02:21:00 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2618L v3 @ 2.30GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      263577512 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 15 14:24

```
SPEC is set to: /spec
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        xfs   440G  133G  307G  31% /
Additional information from dmidecode:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V3 (Intel Xeon E5-2618L v3)

SPECfp_rate2006 = 570

SPECfp_rate_base2006 = 556

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Mar-2015

Software Availability: Sep-2014

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 1.30 02/12/2015

Memory:

8x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz, configured at 1867 MHz
8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1867 MHz
8x NO DIMM NO DIMM 3 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
`LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"`

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

`echo always > /sys/kernel/mm/transparent_hugepage/enabled`

Filesystem page cache cleared with:

`echo 1> /proc/sys/vm/drop_caches`

runspec command invoked through numactl i.e.:

`numactl --interleave=all runspec <etc>`

The Huawei CH121 V3 and Huawei CH222 V3

are electronically equivalent.

The results have been measured on a Huawei CH121 V3 model

Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V3 (Intel Xeon E5-2618L v3)

SPECfp_rate2006 = 570

SPECfp_rate_base2006 = 556

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Mar-2015

Software Availability: Sep-2014

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V3 (Intel Xeon E5-2618L v3)

SPECfp_rate2006 = 570

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Mar-2015

Software Availability: Sep-2014

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
    -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
    -unroll12

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
    -auto-ilp32

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V3 (Intel Xeon E5-2618L v3)

SPECfp_rate2006 = 570

SPECfp_rate_base2006 = 556

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Mar-2015

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V3 (Intel Xeon E5-2618L v3)

SPECfp_rate2006 = 570

SPECfp_rate_base2006 = 556

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Mar-2015

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:46:56 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.