



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 1870

Huawei CH242 V3 (Intel Xeon E7-8860 v3)

SPECfp\_rate\_base2006 = 1820

CPU2006 license: 3175


Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

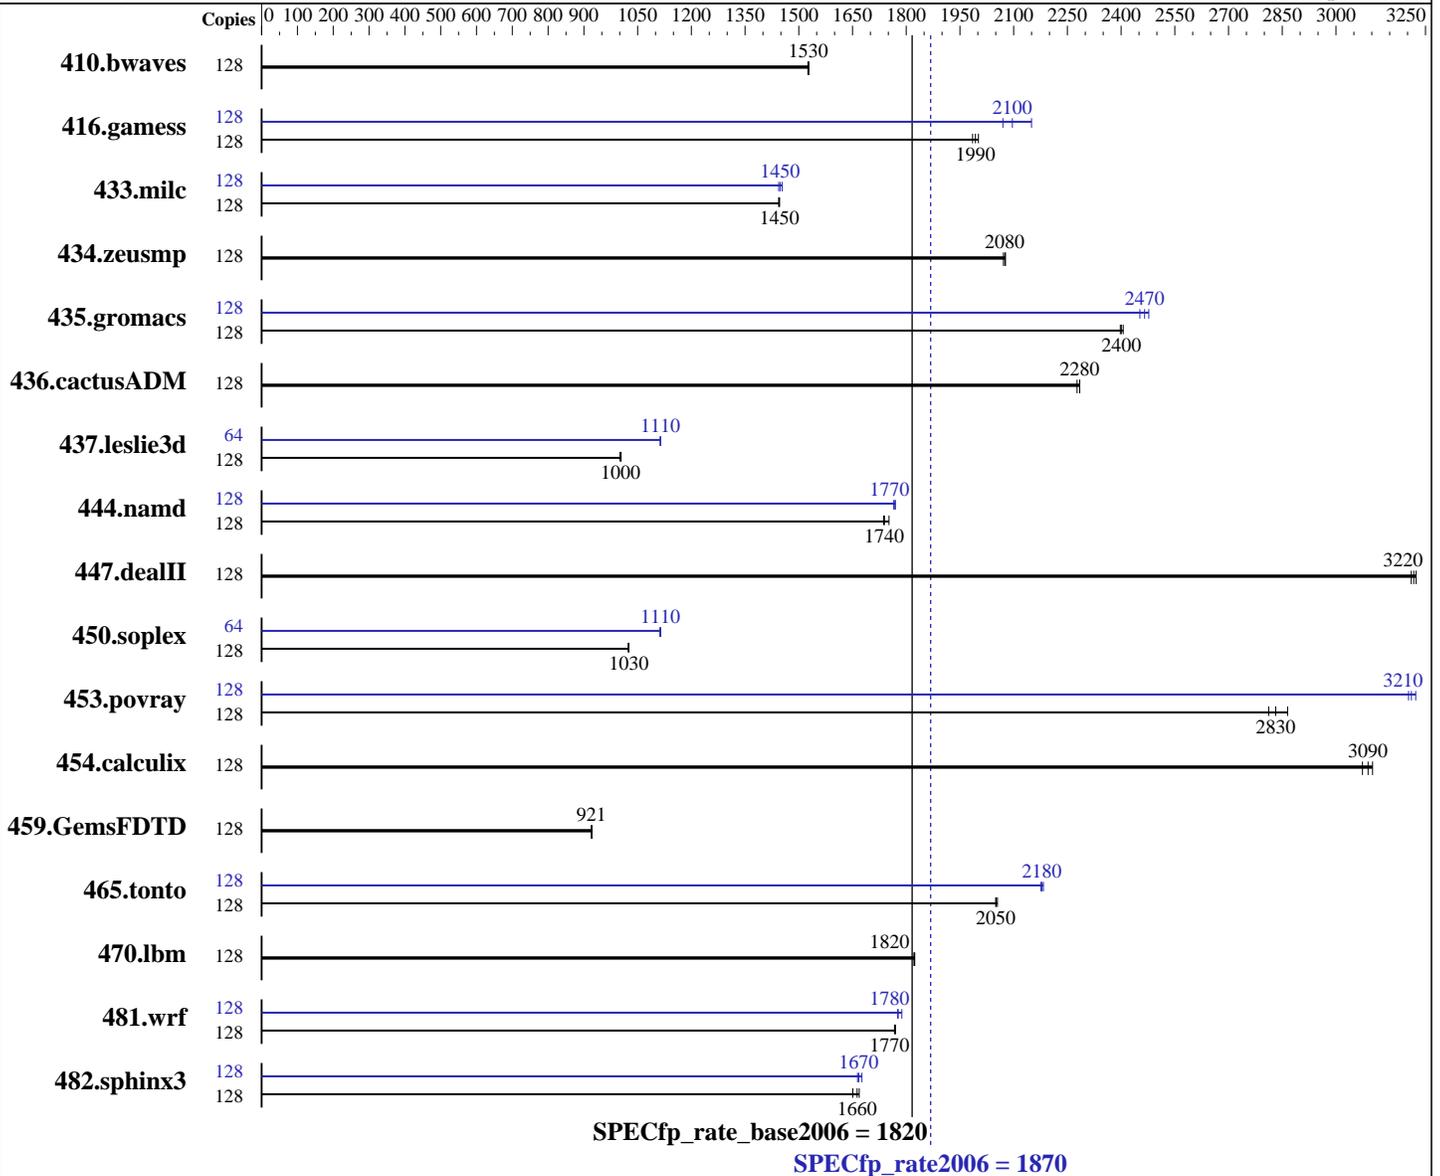

### Hardware

CPU Name: Intel Xeon E7-8860 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 1870

Huawei CH242 V3 (Intel Xeon E7-8860 v3)

SPECfp\_rate\_base2006 = 1820

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

L3 Cache: 40 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	128	1138	1530	1140	1530	<b>1139</b>	<b>1530</b>	128	1138	1530	1140	1530	<b>1139</b>	<b>1530</b>		
416.gamess	128	1262	1990	<b>1257</b>	<b>1990</b>	1252	2000	128	1211	2070	<b>1195</b>	<b>2100</b>	1166	2150		
433.milc	128	814	1440	813	1450	<b>813</b>	<b>1450</b>	128	814	1440	<b>811</b>	<b>1450</b>	808	1450		
434.zeusmp	128	561	2080	562	2070	<b>561</b>	<b>2080</b>	128	561	2080	562	2070	<b>561</b>	<b>2080</b>		
435.gromacs	128	381	2400	<b>381</b>	<b>2400</b>	380	2410	128	373	2450	<b>371</b>	<b>2470</b>	369	2480		
436.cactusADM	128	672	2280	<b>670</b>	<b>2280</b>	670	2280	128	672	2280	<b>670</b>	<b>2280</b>	670	2280		
437.leslie3d	128	1203	1000	1199	1000	<b>1200</b>	<b>1000</b>	64	540	1110	<b>540</b>	<b>1110</b>	540	1110		
444.namd	128	586	1750	591	1740	<b>590</b>	<b>1740</b>	128	582	1770	580	1770	<b>581</b>	<b>1770</b>		
447.dealII	128	<b>455</b>	<b>3220</b>	456	3210	454	3220	128	<b>455</b>	<b>3220</b>	456	3210	454	3220		
450.soplex	128	<b>1041</b>	<b>1030</b>	1043	1020	1041	1030	64	<b>479</b>	<b>1110</b>	480	1110	479	1110		
453.povray	128	238	2860	242	2810	<b>240</b>	<b>2830</b>	128	211	3220	213	3200	<b>212</b>	<b>3210</b>		
454.calculix	128	340	3100	344	3070	<b>342</b>	<b>3090</b>	128	340	3100	344	3070	<b>342</b>	<b>3090</b>		
459.GemsFDTD	128	1475	921	1472	922	<b>1474</b>	<b>921</b>	128	1475	921	1472	922	<b>1474</b>	<b>921</b>		
465.tonto	128	613	2050	<b>614</b>	<b>2050</b>	614	2050	128	579	2180	577	2180	<b>578</b>	<b>2180</b>		
470.lbm	128	964	1820	<b>965</b>	<b>1820</b>	965	1820	128	964	1820	<b>965</b>	<b>1820</b>	965	1820		
481.wrf	128	808	1770	<b>808</b>	<b>1770</b>	809	1770	128	<b>804</b>	<b>1780</b>	805	1780	800	1790		
482.sphinx3	128	1511	1650	1495	1670	<b>1500</b>	<b>1660</b>	128	<b>1496</b>	<b>1670</b>	1499	1660	1488	1680		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Custom  
Set Lock\_step to disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1870

Huawei CH242 V3 (Intel Xeon E7-8860 v3)

SPECfp\_rate\_base2006 = 1820

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

## Platform Notes (Continued)

Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Sat Jul 18 01:52:20 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E7-8860 v3 @ 2.20GHz
 4 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 16
siblings       : 32
physical 0:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size     : 40960 KB
```

From /proc/meminfo

```
MemTotal:      528014740 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 17 12:12

SPEC is set to: /spec

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        xfs       440G  260G  180G  60% /
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1870

Huawei CH242 V3 (Intel Xeon E7-8860 v3)

SPECfp\_rate\_base2006 = 1820

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

## Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISZ015 06/09/2015

Memory:

32x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1870

Huawei CH242 V3 (Intel Xeon E7-8860 v3)

SPECfp\_rate\_base2006 = 1820

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1870

Huawei CH242 V3 (Intel Xeon E7-8860 v3)

SPECfp\_rate\_base2006 = 1820

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1870

Huawei CH242 V3 (Intel Xeon E7-8860 v3)

SPECfp\_rate\_base2006 = 1820

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1870

Huawei CH242 V3 (Intel Xeon E7-8860 v3)

SPECfp\_rate\_base2006 = 1820

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 12 11:07:24 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 August 2015.