



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F, Intel Xeon E3-1225 v5)

SPECfp[®]_rate2006 = 180

SPECfp_rate_base2006 = 176

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

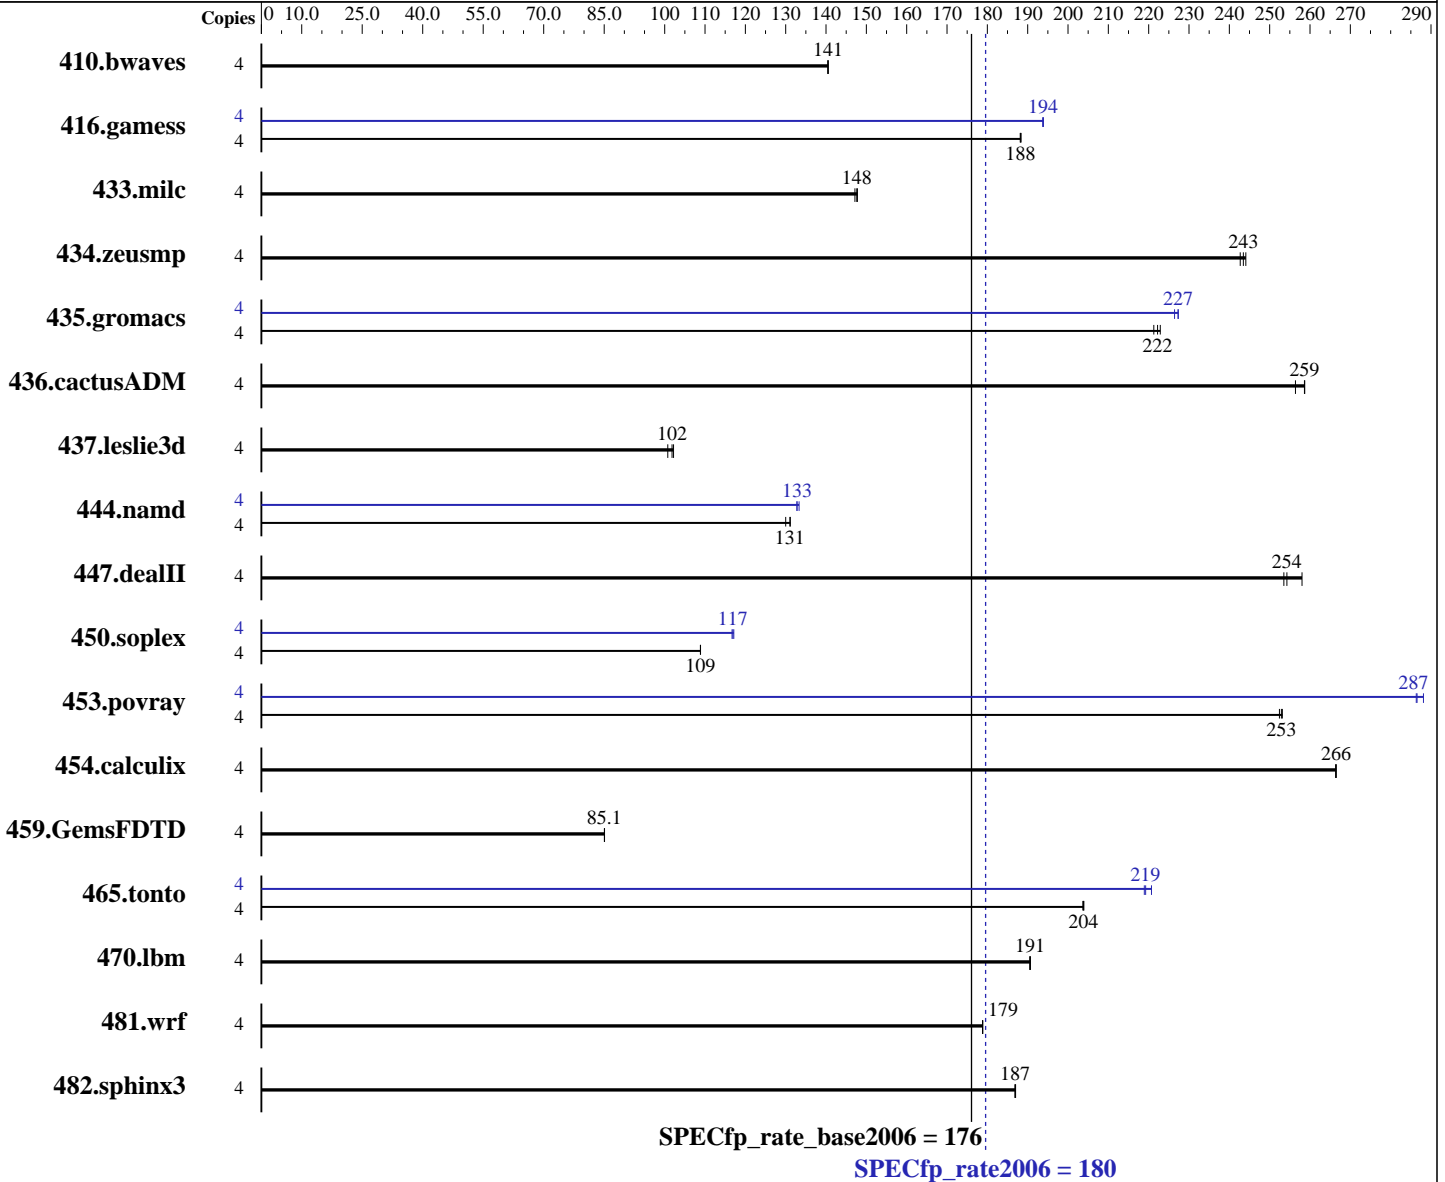

Hardware

CPU Name: Intel Xeon E3-1225 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F, Intel Xeon E3-1225 v5)

SPECfp_rate2006 = 180

SPECfp_rate_base2006 = 176

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2133P-E)
Disk Subsystem: 1 x 400 GB SATA III SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	387	141	387	141	387	140	4	387	141	387	141	387	140
416.gamess	4	416	188	416	188	416	188	4	404	194	404	194	404	194
433.milc	4	250	147	248	148	249	148	4	250	147	248	148	249	148
434.zeusmp	4	150	243	150	243	149	244	4	150	243	150	243	149	244
435.gromacs	4	129	222	128	223	129	221	4	126	226	126	227	126	227
436.cactusADM	4	186	256	185	259	185	259	4	186	256	185	259	185	259
437.leslie3d	4	373	101	368	102	369	102	4	373	101	368	102	369	102
444.namd	4	245	131	247	130	245	131	4	242	133	241	133	242	133
447.dealII	4	180	254	177	258	181	254	4	180	254	177	258	181	254
450.soplex	4	306	109	306	109	306	109	4	286	117	285	117	285	117
453.povray	4	84.1	253	84.1	253	84.3	252	4	74.3	286	73.9	288	74.3	287
454.calculix	4	124	266	124	266	124	266	4	124	266	124	266	124	266
459.GemsFDTD	4	499	85.0	499	85.1	499	85.1	4	499	85.0	499	85.1	499	85.1
465.tonto	4	193	204	193	204	193	204	4	180	219	180	219	178	221
470.lbm	4	288	191	288	191	288	191	4	288	191	288	191	288	191
481.wrf	4	250	179	250	179	250	179	4	250	179	250	179	250	179
482.sphinx3	4	417	187	417	187	417	187	4	417	187	417	187	417	187

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on X10SRA-01 Thu Jan 7 08:20:51 2016

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F, Intel Xeon E3-1225 v5)

SPECfp_rate2006 = 180

SPECfp_rate_base2006 = 176

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1225 v5 @ 3.30GHz
 1 "physical id"s (chips)
 4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings   : 4
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

From /proc/meminfo

```
MemTotal:      32768808 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

uname -a:

```
Linux X10SRA-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 6 18:41

SPEC is set to: /usr/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   183G  9.3G  174G   6% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F, Intel Xeon E3-1225 v5)

SPECfp_rate2006 = 180

SPECfp_rate_base2006 = 176

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jan-2016
Hardware Availability: Oct-2015
Software Availability: Sep-2015

Platform Notes (Continued)

BIOS American Megatrends Inc. 1.0b 12/22/2015

Memory:

2x Not Specified Not Specified

2x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F, Intel Xeon E3-1225 v5)

SPECfp_rate2006 = 180

SPECfp_rate_base2006 = 176

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F, Intel Xeon E3-1225 v5)

SPECfp_rate2006 = 180

SPECfp_rate_base2006 = 176

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F, Intel Xeon E3-1225 v5)

SPECfp_rate2006 = 180

SPECfp_rate_base2006 = 176

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

416.gamess: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3`

Benchmarks using both Fortran and C:

435.gromacs: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 26 15:12:06 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 January 2016.