



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

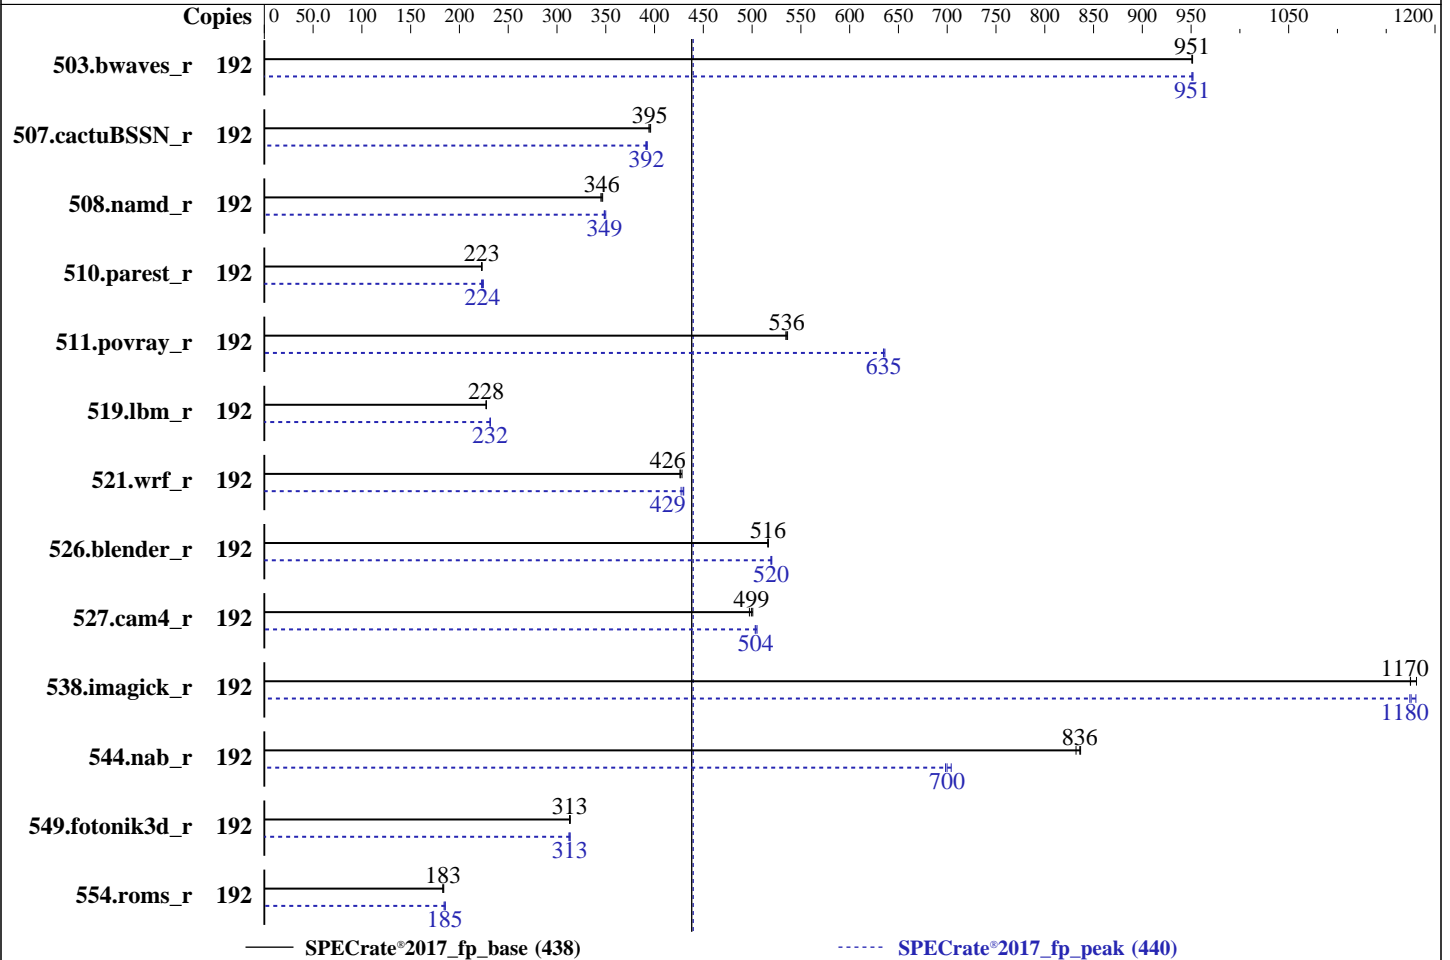

Hardware

CPU Name: Intel Xeon Platinum 8160
 Max MHz: 3700
 Nominal: 2100
 Enabled: 96 cores, 4 chips, 2 threads/core
 Orderable: 2,4 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 33 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 600 GB SAS HDD, 10K RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.103-92.56-default
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 3.2.3c released Mar-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	2025	951	2023	952	<u>2025</u>	<u>951</u>	192	2025	951	<u>2025</u>	<u>951</u>	2023	952
507.cactuBSSN_r	192	617	394	614	396	<u>615</u>	<u>395</u>	192	619	393	622	391	<u>620</u>	<u>392</u>
508.namd_r	192	529	345	<u>527</u>	<u>346</u>	526	347	192	521	350	<u>523</u>	<u>349</u>	523	348
510.parest_r	192	<u>2253</u>	<u>223</u>	2256	223	2250	223	192	2237	225	<u>2246</u>	<u>224</u>	2256	223
511.povray_r	192	839	535	<u>837</u>	<u>536</u>	836	536	192	705	636	706	635	<u>706</u>	<u>635</u>
519.lbm_r	192	<u>889</u>	<u>228</u>	890	227	889	228	192	<u>874</u>	<u>232</u>	874	232	874	232
521.wrf_r	192	1005	428	1009	426	<u>1009</u>	<u>426</u>	192	<u>1002</u>	<u>429</u>	1000	430	1007	427
526.blender_r	192	<u>566</u>	<u>516</u>	567	516	566	517	192	<u>563</u>	<u>520</u>	563	519	562	520
527.cam4_r	192	671	501	675	497	<u>673</u>	<u>499</u>	192	<u>667</u>	<u>504</u>	665	505	667	503
538.imagick_r	192	406	1170	<u>406</u>	<u>1170</u>	404	1180	192	407	1170	405	1180	<u>406</u>	<u>1180</u>
544.nab_r	192	386	837	388	832	<u>387</u>	<u>836</u>	192	459	704	<u>462</u>	<u>700</u>	463	698
549.fotonik3d_r	192	2386	314	<u>2389</u>	<u>313</u>	2392	313	192	2396	312	2387	313	<u>2390</u>	<u>313</u>
554.roms_r	192	<u>1664</u>	<u>183</u>	1668	183	1659	184	192	<u>1647</u>	<u>185</u>	1656	184	1645	185

SPECrate®2017_fp_base = **438**

SPECrate®2017_fp_peak = **440**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
Power Performance Tuning set to OS Controls
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-xy4f Wed May 23 01:33:11 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
 4 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings  : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:   0-191
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
Stepping: 4
CPU MHz: 1013.998
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 4199.99
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,96-98,102-104,108-110,114-116
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,99-101,105-107,111-113,117-119
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143
NUMA node4 CPU(s): 48-50,54-56,60-62,66-68,144-146,150-152,156-158,162-164
NUMA node5 CPU(s): 51-53,57-59,63-65,69-71,147-149,153-155,159-161,165-167
NUMA node6 CPU(s): 72-74,78-80,84-86,90-92,168-170,174-176,180-182,186-188
NUMA node7 CPU(s): 75-77,81-83,87-89,93-95,171-173,177-179,183-185,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt spec_ctrl kaiser tpr_shadow
vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 96 97 98 102 103 104 108 109 110 114 115 116
node 0 size: 95327 MB
node 0 free: 95180 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 99 100 101 105 106 107 111 112 113 117 118
119
node 1 size: 96760 MB
node 1 free: 96577 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134
138 139 140
node 2 size: 96760 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```

node 2 free: 96597 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137
141 142 143
node 3 size: 96760 MB
node 3 free: 96605 MB
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 144 145 146 150 151 152 156 157 158
162 163 164
node 4 size: 96760 MB
node 4 free: 96633 MB
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 147 148 149 153 154 155 159 160 161
165 166 167
node 5 size: 96760 MB
node 5 free: 96578 MB
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 168 169 170 174 175 176 180 181 182
186 187 188
node 6 size: 96760 MB
node 6 free: 96623 MB
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 171 172 173 177 178 179 183 184 185
189 190 191
node 7 size: 96758 MB
node 7 free: 96638 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 11 21 21 21 21 21 21
1:  11 10 21 21 21 21 21 21
2:  21 21 10 11 21 21 21 21
3:  21 21 11 10 21 21 21 21
4:  21 21 21 21 10 11 21 21
5:  21 21 21 21 11 10 21 21
6:  21 21 21 21 21 21 10 11
7:  21 21 21 21 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      791191672 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-xy4f 4.4.103-92.56-default #1 SMP Wed Dec 27 16:24:31 UTC 2017 (2fd2155)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 1 05:49
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        xfs   224G   68G  156G  31% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Cisco Systems, Inc. B480M5.3.2.3c.0.0307181316 03/07/2018
Memory:
48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

```
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

```
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C    | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====  
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
```

```
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====  
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)  
| 554.roms_r(base, peak)
```

```
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====  
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
```

```
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

519.lbm_r (continued):

-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3

-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -nostandard-realloc-lhs

-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2018-06-13.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8160, 2.10 GHz)

SPECrate®2017_fp_base = 438

SPECrate®2017_fp_peak = 440

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: May-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2018-06-13.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.2 on 2018-05-23 01:33:11-0400.

Report generated on 2019-12-13 17:53:54 by CPU2017 PDF formatter v6255.

Originally published on 2018-06-12.