



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_base = 45.2

SPECrate2017\_fp\_peak = 45.8

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jul-2018  
Hardware Availability: Aug-2017  
Software Availability: Feb-2018

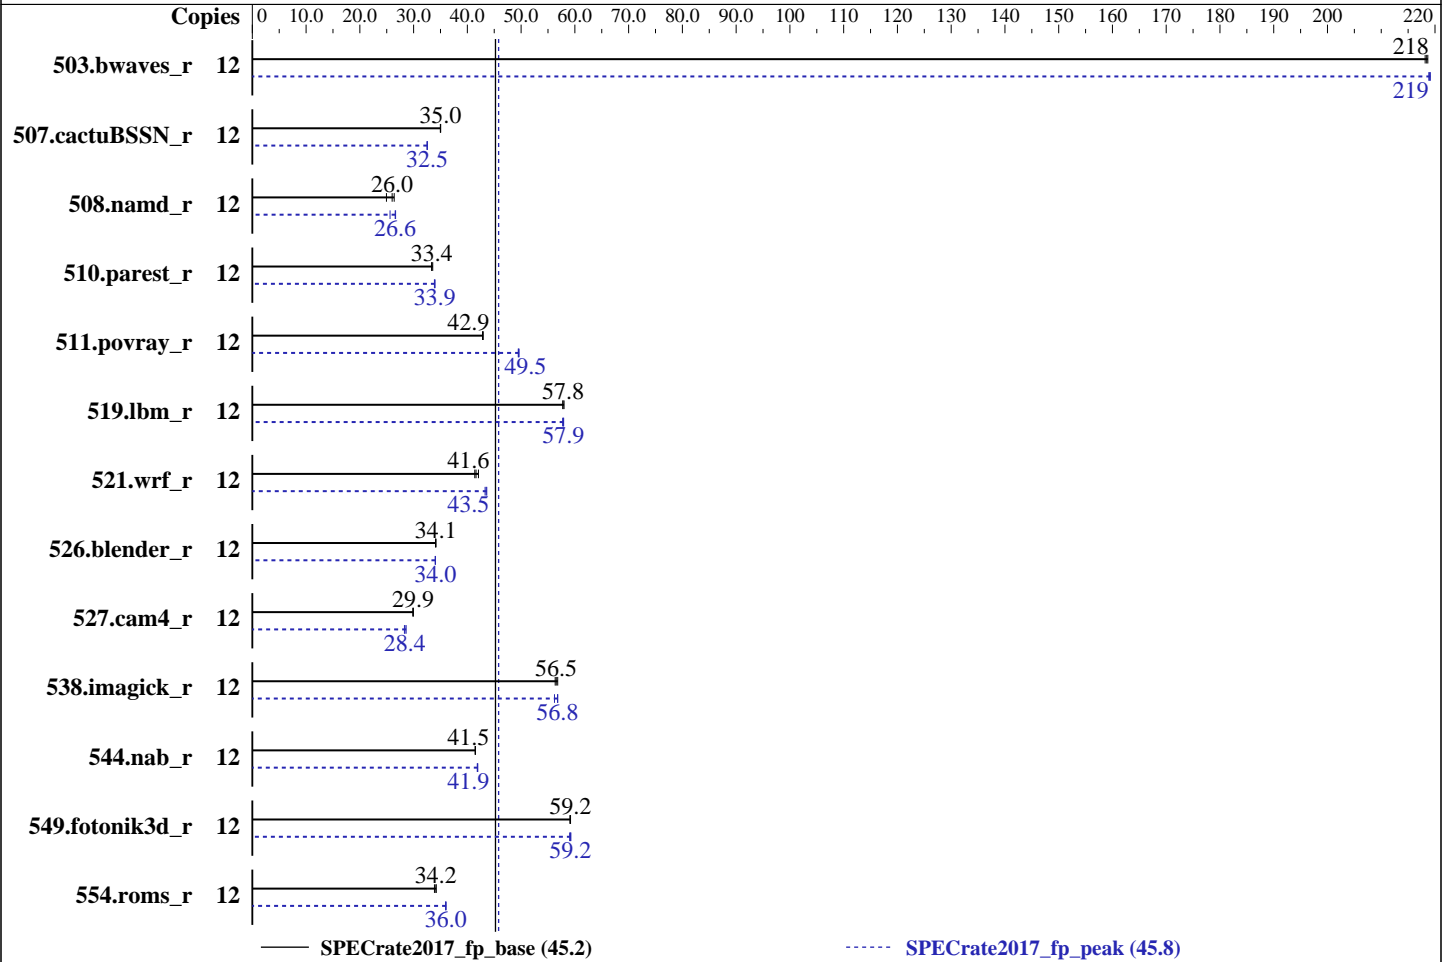

### Hardware

CPU Name: Intel Xeon Bronze 3104  
 Max MHz.: 1700  
 Nominal: 1700  
 Enabled: 12 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 8.25 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2133)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.114-92.64-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version TEE119R 1.22 released Feb-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_base = 45.2

SPECrate2017\_fp\_peak = 45.8

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jul-2018  
Hardware Availability: Aug-2017  
Software Availability: Feb-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	12	552	218	<b><u>551</u></b>	<b><u>218</u></b>	550	219	12	550	219	<b><u>549</u></b>	<b><u>219</u></b>	549	219
507.cactuBSSN_r	12	434	35.0	<b><u>434</u></b>	<b><u>35.0</u></b>	434	35.0	12	467	32.5	<b><u>467</u></b>	<b><u>32.5</u></b>	467	32.6
508.namd_r	12	<b><u>438</u></b>	<b><u>26.0</u></b>	432	26.4	457	24.9	12	445	25.6	<b><u>429</u></b>	<b><u>26.6</u></b>	428	26.7
510.parest_r	12	935	33.6	<b><u>940</u></b>	<b><u>33.4</u></b>	941	33.4	12	924	34.0	927	33.9	<b><u>925</u></b>	<b><u>33.9</u></b>
511.povray_r	12	654	42.8	653	42.9	<b><u>653</u></b>	<b><u>42.9</u></b>	12	<b><u>566</u></b>	<b><u>49.5</u></b>	565	49.6	566	49.5
519.lbm_r	12	219	57.8	<b><u>219</u></b>	<b><u>57.8</u></b>	218	58.0	12	219	57.7	<b><u>219</u></b>	<b><u>57.9</u></b>	218	57.9
521.wrf_r	12	<b><u>646</u></b>	<b><u>41.6</u></b>	639	42.1	650	41.4	12	<b><u>618</u></b>	<b><u>43.5</u></b>	616	43.6	621	43.3
526.blender_r	12	535	34.1	536	34.1	<b><u>535</u></b>	<b><u>34.1</u></b>	12	537	34.0	537	34.1	<b><u>537</u></b>	<b><u>34.0</u></b>
527.cam4_r	12	702	29.9	<b><u>702</u></b>	<b><u>29.9</u></b>	701	29.9	12	734	28.6	742	28.3	<b><u>739</u></b>	<b><u>28.4</u></b>
538.imagick_r	12	525	56.8	<b><u>528</u></b>	<b><u>56.5</u></b>	530	56.3	12	<b><u>526</u></b>	<b><u>56.8</u></b>	531	56.2	525	56.8
544.nab_r	12	487	41.5	487	41.5	<b><u>487</u></b>	<b><u>41.5</u></b>	12	<b><u>482</u></b>	<b><u>41.9</u></b>	482	41.9	483	41.8
549.fotonik3d_r	12	790	59.2	<b><u>790</u></b>	<b><u>59.2</u></b>	792	59.1	12	792	59.0	789	59.3	<b><u>790</u></b>	<b><u>59.2</u></b>
554.roms_r	12	563	33.9	<b><u>558</u></b>	<b><u>34.2</u></b>	558	34.2	12	529	36.0	530	36.0	<b><u>530</u></b>	<b><u>36.0</u></b>

SPECrate2017\_fp\_base = 45.2

SPECrate2017\_fp\_peak = 45.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 45.2

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_peak = 45.8

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Feb-2018

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Disable

Hardware Prefetcher set to Disable

MONITOR/MWAIT set to Enable

Execute Disable Bit set to Disable

Intel Virtualization Technology set to Disable

DCA set to Enable

    Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

    Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

    running on linux-6zlr Fri Jul 6 15:30:51 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

    model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz

        2 "physical id"s (chips)

        12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

    cpu cores : 6

    siblings : 6

    physical 0: cores 0 1 2 3 4 5

    physical 1: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 12

On-line CPU(s) list: 0-11

Thread(s) per core: 1

Core(s) per socket: 6

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 45.2

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_peak = 45.8

CPU2017 License: 9017

Test Date: Jul-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Feb-2018

### Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
Stepping: 4
CPU MHz: 1696.004
BogoMIPS: 3392.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 8448K
NUMA node0 CPU(s): 0-5
NUMA node1 CPU(s): 6-11
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 8448 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 193110 MB
node 0 free: 192677 MB
node 1 cpus: 6 7 8 9 10 11
node 1 size: 193504 MB
node 1 free: 193123 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

```

From /proc/meminfo
MemTotal: 395894048 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 45.2

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_peak = 45.8

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-6zlr 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 6 15:26
```

```
SPEC is set to: /home/cpu2017.1.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   744G   35G  709G   5% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[TEE119R-1.22]- 02/06/2018
Memory:
4x NO DIMM NO DIMM
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2133
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)  
=====
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====
```

```
CC 519.lbm_r(peak) 544.nab_r(peak)
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 45.2

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_peak = 45.8

**CPU2017 License:** 9017

**Test Date:** Jul-2018

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Feb-2018

## Compiler Version Notes (Continued)

-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 507.cactuBSSN\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_base = 45.2

SPECrate2017\_fp\_peak = 45.8

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Feb-2018

## Compiler Version Notes (Continued)

=====  
FC 507.cactuBSSN\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 554.roms\_r(peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_fp\_base = 45.2

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_peak = 45.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_fp\_base = 45.2

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_peak = 45.8

CPU2017 License: 9017

Test Date: Jul-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Feb-2018

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

`-qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

## Base Other Flags

C benchmarks:

`-m64 -std=c11`

C++ benchmarks:

`-m64`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using both C and C++:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_base = 45.2

SPECrate2017\_fp\_peak = 45.8

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Feb-2018

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_fp\_base = 45.2

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_peak = 45.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

## Peak Optimization Flags (Continued)

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 45.2

ThinkSystem SD530  
(1.70 GHz, Intel Xeon Bronze 3104)

SPECrate2017\_fp\_peak = 45.8

**CPU2017 License:** 9017

**Test Date:** Jul-2018

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Feb-2018

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-07-06 03:30:50-0400.

Report generated on 2018-10-31 18:32:44 by CPU2017 PDF formatter v6067.

Originally published on 2018-08-07.