



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 8.89

Huawei CH225 V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_peak = 9.22

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Aug-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

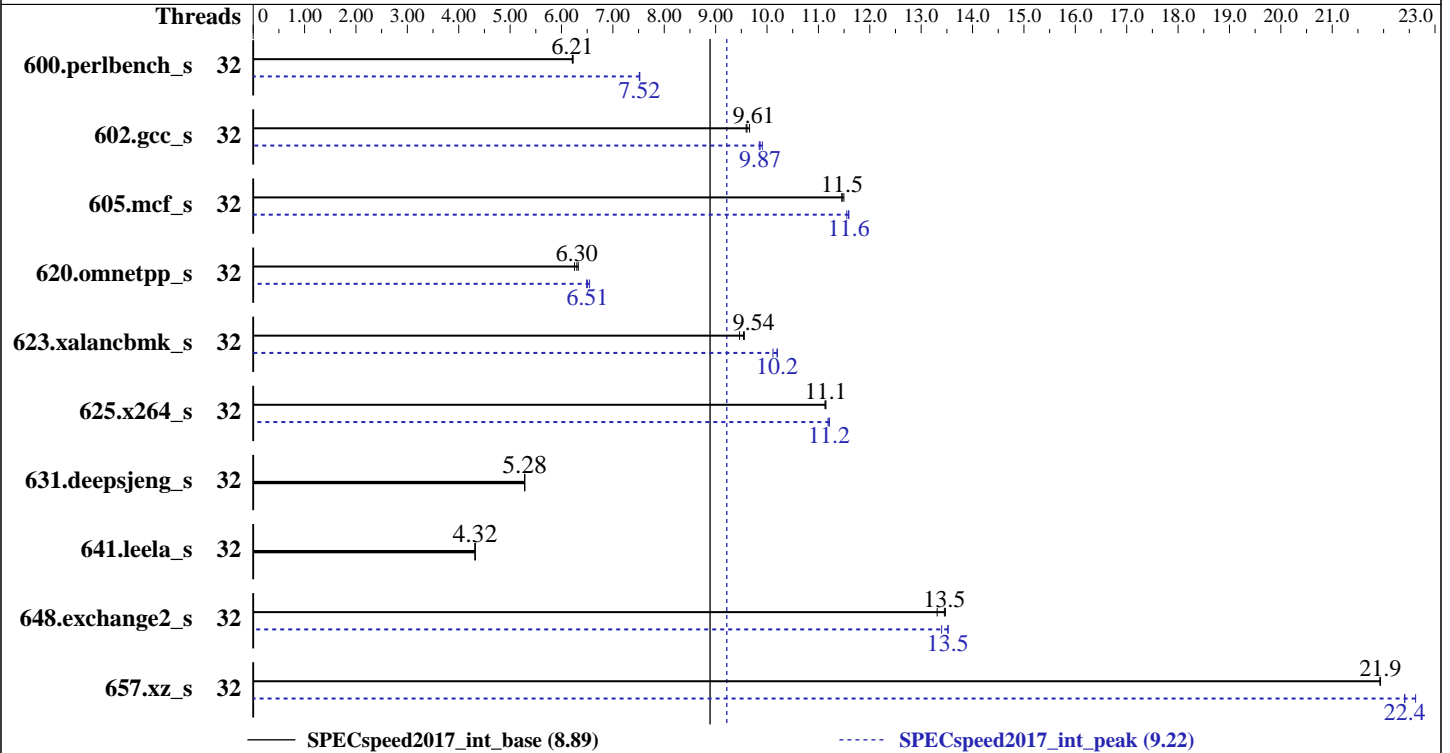

Hardware

CPU Name: Intel Xeon Gold 6130
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 32 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
 3.10.0-693.11.6.el7.x86_64
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 0.80 Released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 8.89

Huawei CH225 V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_peak = 9.22

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Aug-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	285	6.23	286	6.21	286	6.21	32	236	7.52	236	7.52	236	7.51
602.gcc_s	32	412	9.66	414	9.61	415	9.59	32	402	9.91	404	9.85	404	9.87
605.mcf_s	32	411	11.5	412	11.5	412	11.5	32	407	11.6	407	11.6	409	11.6
620.omnetpp_s	32	258	6.33	261	6.25	259	6.30	32	251	6.51	249	6.55	251	6.49
623.xalancbmk_s	32	148	9.56	150	9.47	149	9.54	32	139	10.2	139	10.2	140	10.1
625.x264_s	32	159	11.1	158	11.1	158	11.1	32	157	11.2	158	11.2	157	11.2
631.deepsjeng_s	32	271	5.28	271	5.29	271	5.28	32	271	5.28	271	5.29	271	5.28
641.leela_s	32	395	4.32	395	4.32	395	4.32	32	395	4.32	395	4.32	395	4.32
648.exchange2_s	32	219	13.5	221	13.3	218	13.5	32	217	13.5	217	13.5	219	13.4
657.xz_s	32	282	21.9	282	21.9	282	21.9	32	276	22.4	276	22.4	273	22.6

SPECspeed2017_int_base = **8.89**

SPECspeed2017_int_peak = **9.22**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 8.89

Huawei CH225 V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_peak = 9.22

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Aug-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Platform Notes

BIOS configuration:

Power Policy Set to Load Balance

Hyper-Threading Set to Disable

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Mon Aug 27 05:51:54 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

On-line CPU(s) list: 0-31

Thread(s) per core: 1

Core(s) per socket: 16

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz

Stepping: 4

CPU MHz: 2101.000

CPU max MHz: 2101.0000

CPU min MHz: 1000.0000

BogoMIPS: 4200.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 22528K

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 8.89

Huawei CH225 V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_peak = 9.22

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Aug-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```
NUMA node0 CPU(s):      0-15
NUMA node1 CPU(s):      16-31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 fma cx16 xtpr
pdcmm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single intel_pt
spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx
smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts
```

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 194741 MB
node 0 free: 189653 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 196608 MB
node 1 free: 192084 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

```
From /proc/meminfo
MemTotal:      394175288 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 8.89

Huawei CH225 V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_peak = 9.22

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Aug-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:

```
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST 2017 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 27 05:13

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-root	xfs	409G	19G	391G	5%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.80 06/27/2018

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base, peak) 657.xz_s(base)

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 8.89

Huawei CH225 V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_peak = 9.22

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Aug-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Compiler Version Notes (Continued)

=====
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
641.leela_s(peak)
=====

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

FC 648.exchange2_s(base, peak)
=====

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 8.89

Huawei CH225 V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_peak = 9.22

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Aug-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
623.xalancbmk_s: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64  
641.leela_s: -DSPEC_LP64  
648.exchange2_s: -DSPEC_LP64  
657.xz_s: -DSPEC_LP64
```



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 8.89

Huawei CH225 V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_peak = 9.22

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Aug-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX2 -qopt-prefetch -ipo -O3  
-qopt-mem-layout-trans=3 -no-prec-div  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
602.gcc_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX2 -qopt-prefetch -ipo -O3  
-qopt-mem-layout-trans=3 -no-prec-div  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

```
620.omnetpp_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
623.xalancbmk_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

```
-w1, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```




SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 8.89

Huawei CH225 V5 (Intel Xeon Gold 6130)

SPECspeed2017_int_peak = 9.22

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Aug-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-08-27 05:51:53-0400.

Report generated on 2018-10-31 18:39:56 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-18.