



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

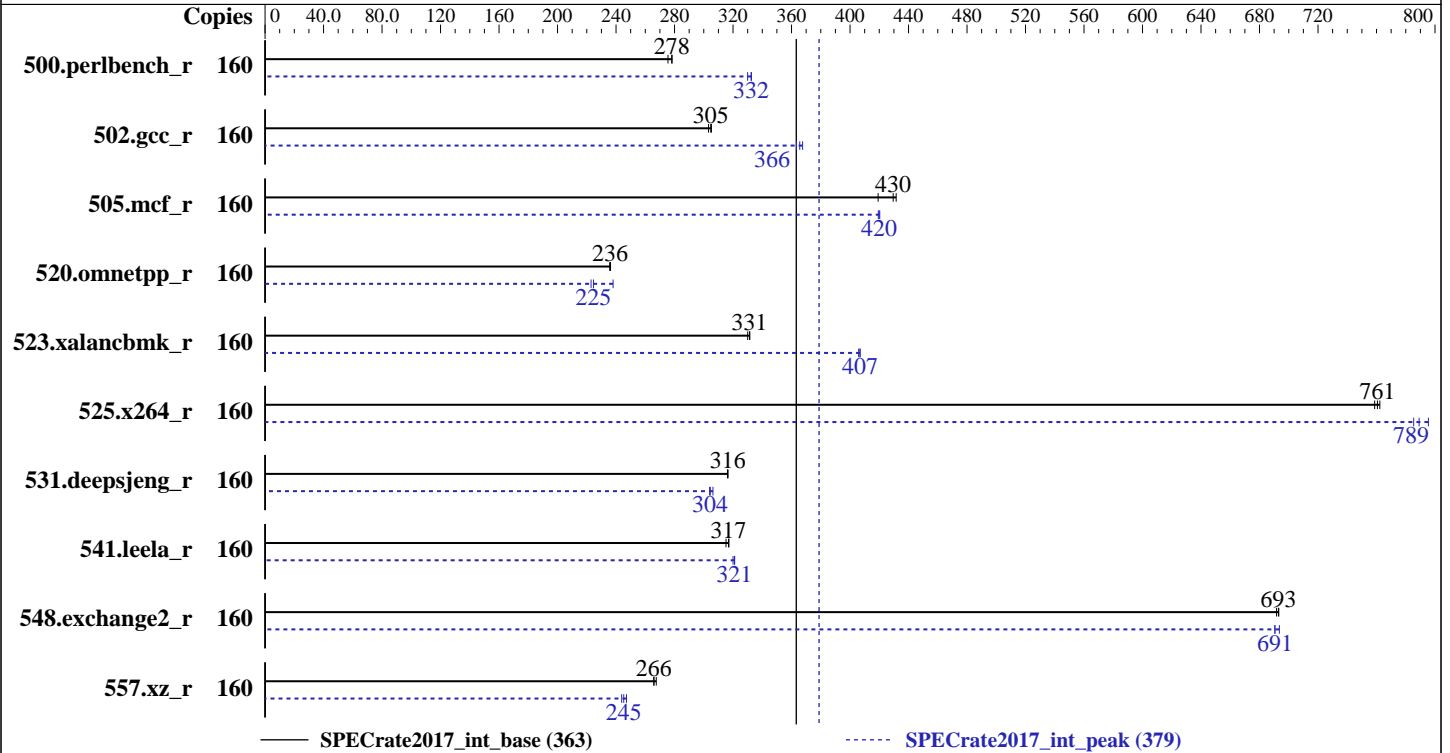

Hardware

CPU Name: Intel Xeon Gold 6138
 Max MHz.: 3700
 Nominal: 2000
 Enabled: 80 cores, 4 chips, 2 threads/core
 Orderable: 2,4 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 1 TB HDD, 7.2K RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.120-92.70-default
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 3.1.3e released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2019
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|------------|------------|------------|------------|------------|------------|--------|------------|------------|------------|------------|------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 160 | 916 | 278 | 924 | 276 | 915 | 278 | 160 | 766 | 332 | 766 | 333 | 772 | 330 |
| 502.gcc_r | 160 | 742 | 305 | 743 | 305 | 747 | 303 | 160 | 616 | 368 | 620 | 366 | 623 | 363 |
| 505.mcf_r | 160 | 599 | 432 | 602 | 430 | 617 | 419 | 160 | 617 | 419 | 615 | 420 | 616 | 420 |
| 520.omnetpp_r | 160 | 889 | 236 | 889 | 236 | 891 | 236 | 160 | 882 | 238 | 942 | 223 | 935 | 225 |
| 523.xalancbmk_r | 160 | 510 | 331 | 512 | 330 | 510 | 331 | 160 | 415 | 407 | 415 | 407 | 416 | 406 |
| 525.x264_r | 160 | 368 | 762 | 369 | 759 | 368 | 761 | 160 | 352 | 795 | 355 | 789 | 357 | 785 |
| 531.deepsjeng_r | 160 | 579 | 317 | 579 | 316 | 580 | 316 | 160 | 599 | 306 | 603 | 304 | 602 | 304 |
| 541.leela_r | 160 | 841 | 315 | 835 | 317 | 836 | 317 | 160 | 828 | 320 | 825 | 321 | 825 | 321 |
| 548.exchange2_r | 160 | 605 | 693 | 606 | 692 | 605 | 693 | 160 | 604 | 694 | 607 | 691 | 607 | 690 |
| 557.xz_r | 160 | 650 | 266 | 646 | 268 | 650 | 266 | 160 | 699 | 247 | 709 | 244 | 705 | 245 |

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

General Notes (Continued)

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Enabled

CPU performance set to Enterprise

Power Performance Tuning set to OS Controls

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-9r4j Tue Feb 5 01:32:13 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz

4 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 160

On-line CPU(s) list: 0-159

Thread(s) per core: 2

Core(s) per socket: 20

Socket(s): 4

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2019
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Platform Notes (Continued)

```

NUMA node(s):      8
Vendor ID:         GenuineIntel
CPU family:        6
Model:             85
Model name:        Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
Stepping:          4
CPU MHz:           2699.999
CPU max MHz:       3700.0000
CPU min MHz:       1000.0000
BogoMIPS:          3995.68
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          28160K
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119
NUMA node4 CPU(s): 40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136
NUMA node5 CPU(s): 43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139
NUMA node6 CPU(s): 60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156
NUMA node7 CPU(s): 63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle
avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96
node 0 size: 192093 MB
node 0 free: 191887 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99
node 1 size: 193528 MB
node 1 free: 193323 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Platform Notes (Continued)

```

node 2 size: 193528 MB
node 2 free: 193376 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119
node 3 size: 193528 MB
node 3 free: 193307 MB
node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136
node 4 size: 193528 MB
node 4 free: 193318 MB
node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139
node 5 size: 193528 MB
node 5 free: 193309 MB
node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156
node 6 size: 193528 MB
node 6 free: 193378 MB
node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159
node 7 size: 193525 MB
node 7 free: 193244 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
  4: 21 21 21 21 10 11 21 21
  5: 21 21 21 21 11 10 21 21
  6: 21 21 21 21 21 21 10 11
  7: 21 21 21 21 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      1583913048 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2019
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Platform Notes (Continued)

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

```
Linux linux-9r4j 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Dec 27 14:13

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       xfs   930G   35G  896G   4% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C480M5.3.1.3e.0.0613181101 06/13/2018

Memory:

48x 0xCE00 M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 502.gcc_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Compiler Version Notes (Continued)

=====
CC 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 523.xalancbmk_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 531.deepsjeng_r(peak) 541.leela_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138,
2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64 -std=c11

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138,
2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Peak Compiler Invocation (Continued)

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.0.117/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.0.117/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbenc_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbenc_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
502.gcc_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -w1, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 363

SPECrate2017_int_peak = 379

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Peak Optimization Flags (Continued)

525.x264_r: -w1, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-w1, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-02-05 01:32:12-0500.

Report generated on 2019-03-05 15:55:03 by CPU2017 PDF formatter v6067.

Originally published on 2019-03-05.