



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu


PRIMERGY CX2550 M5, Intel Xeon Gold 5222, 3.80 GHz

SPECrate®2017\_int\_base = 62.1

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: May-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

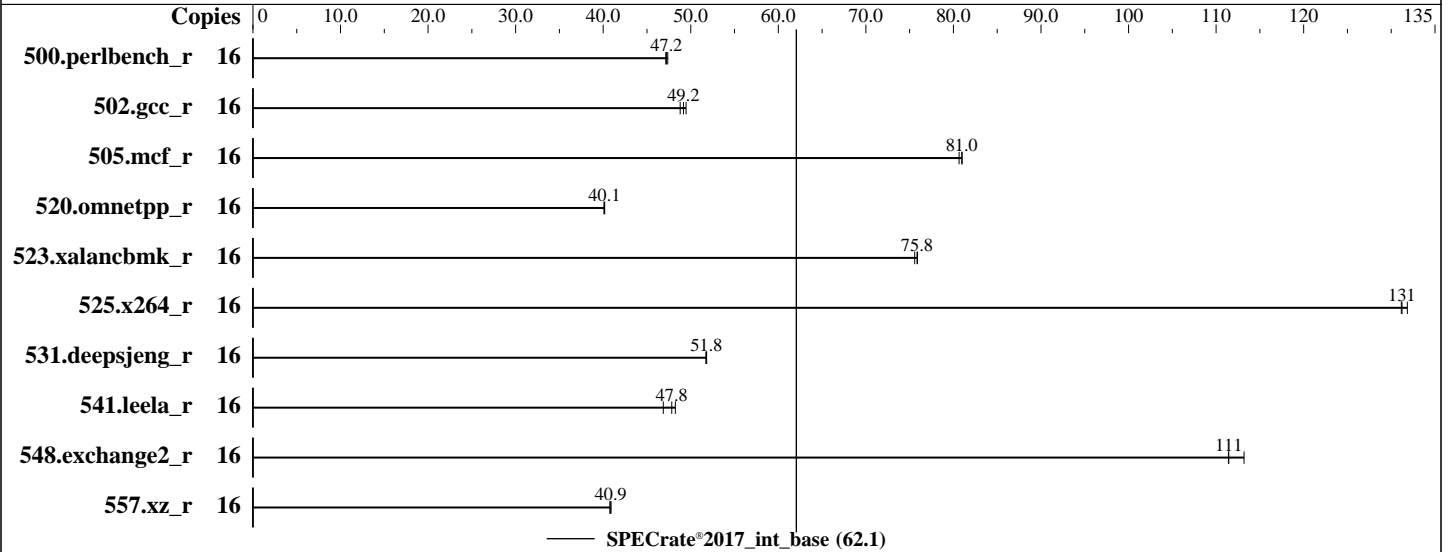

### Hardware

CPU Name: Intel Xeon Gold 5222  
Max MHz: 3900  
Nominal: 3800  
Enabled: 8 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 16.5 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x SATA M.2 SSD, 128 GB  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
4.12.14-25.28-default  
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
Compiler Build 20181018 for Linux;  
Fortran: Version 19.0.1.144 of Intel Fortran  
Compiler Build 20181018 for Linux  
Parallel: No  
Firmware: Fujitsu BIOS Version V1.0.0.0 R1.6.0 for D3853-B1x,  
released Jun-2019. Tested as V1.0.0.0 R1.3.3  
for D3853-B1x Mar-2019  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M5, Intel Xeon Gold 5222,  
3.80 GHz

SPECrate®2017\_int\_base = 62.1

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: May-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	<b>539</b>	<b>47.2</b>	538	47.4	540	47.1							
502.gcc_r	16	458	49.5	464	48.8	<b>461</b>	<b>49.2</b>							
505.mcf_r	16	319	81.0	<b>319</b>	<b>81.0</b>	321	80.6							
520.omnetpp_r	16	523	40.2	524	40.1	<b>523</b>	<b>40.1</b>							
523.xalancbmk_r	16	224	75.6	<b>223</b>	<b>75.8</b>	223	75.9							
525.x264_r	16	214	131	212	132	<b>213</b>	<b>131</b>							
531.deepsjeng_r	16	354	51.7	<b>354</b>	<b>51.8</b>	354	51.8							
541.leela_r	16	565	46.9	<b>554</b>	<b>47.8</b>	549	48.2							
548.exchange2_r	16	376	111	370	113	<b>376</b>	<b>111</b>							
557.xz_r	16	424	40.8	<b>423</b>	<b>40.9</b>	423	40.9							

SPECrate®2017\_int\_base = 62.1

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-15

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-1.0.5\_rate\_int/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M5, Intel Xeon Gold 5222,  
3.80 GHz

SPECrate®2017\_int\_base = 62.1

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Adjacent Cache Line Prefetch = Disabled

DCU Ip Prefetcher = Disabled

DCU Streamer Prefetcher = Disabled

Power Technology = Custom

Energy Performance = Balanced Performance

Uncore Frequency Scaling = Disabled

Sub NUMA Clustering = Enabled

Stale AtoS = Enable

LLC Prefetch = Enabled

Sysinfo program /home/Benchmark/speccpu2017-1.0.5\_rate\_int/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-5cpq Tue May 7 22:31:47 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 8

physical 0: cores 2 5 9 13

physical 1: cores 2 5 9 13

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 16

On-line CPU(s) list: 0-15

Thread(s) per core: 2

Core(s) per socket: 4

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M5, Intel Xeon Gold 5222,  
3.80 GHz

SPECrate®2017\_int\_base = 62.1

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### Platform Notes (Continued)

```

CPU family:      6
Model:          85
Model name:     Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz
Stepping:      7
CPU MHz:       3800.000
CPU max MHz:   3900.0000
CPU min MHz:   1200.0000
BogoMIPS:      7600.00
Virtualization: VT-x
L1d cache:     32K
L1i cache:     32K
L2 cache:      1024K
L3 cache:      16896K
NUMA node0 CPU(s): 0,1,8,10
NUMA node1 CPU(s): 2,3,9,11
NUMA node2 CPU(s): 4,6,12,14
NUMA node3 CPU(s): 5,7,13,15

```

```

Flags:          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 8 10
node 0 size: 95458 MB
node 0 free: 95253 MB
node 1 cpus: 2 3 9 11
node 1 size: 96732 MB
node 1 free: 96564 MB
node 2 cpus: 4 6 12 14
node 2 size: 96761 MB
node 2 free: 96594 MB
node 3 cpus: 5 7 13 15
node 3 size: 96760 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M5, Intel Xeon Gold 5222,  
3.80 GHz

SPECrate®2017\_int\_base = 62.1

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### Platform Notes (Continued)

```
node 3 free: 96597 MB
node distances:
node  0  1  2  3
  0:  10  11  19  19
  1:  11  10  19  19
  2:  19  19  10  11
  3:  19  19  11  10
```

```
From /proc/meminfo
MemTotal:          394970792 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux linux-5cpq 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

run-level 3 May 7 22:15

```
SPEC is set to: /home/Benchmark/speccpu2017-1.0.5_rate_int
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        btrfs    117G   48G   68G  42% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU V1.0.0.0 R1.3.3 for D3853-B1x          03/15/2019
Memory:
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY CX2550 M5, Intel Xeon Gold 5222,  
3.80 GHz

SPECrate®2017\_int\_base = 62.1

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Platform Notes (Continued)

12x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933  
4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
      | 525.x264_r(base) 557.xz_r(base)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++   | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
     | 541.leela_r(base)  
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

```
=====  
Fortran | 548.exchange2_r(base)  
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M5, Intel Xeon Gold 5222,  
3.80 GHz

SPECrate®2017\_int\_base = 62.1

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502 gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

### C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

### Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY CX2550 M5, Intel Xeon Gold 5222,  
3.80 GHz

SPECrate<sup>®</sup>2017\_int\_base = 62.1

SPECrate<sup>®</sup>2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.0.5 on 2019-05-07 09:31:46-0400.

Report generated on 2019-11-26 12:49:32 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.