



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6262V,  
1.90 GHz

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2019

Hardware Availability: May-2019

Software Availability: May-2019

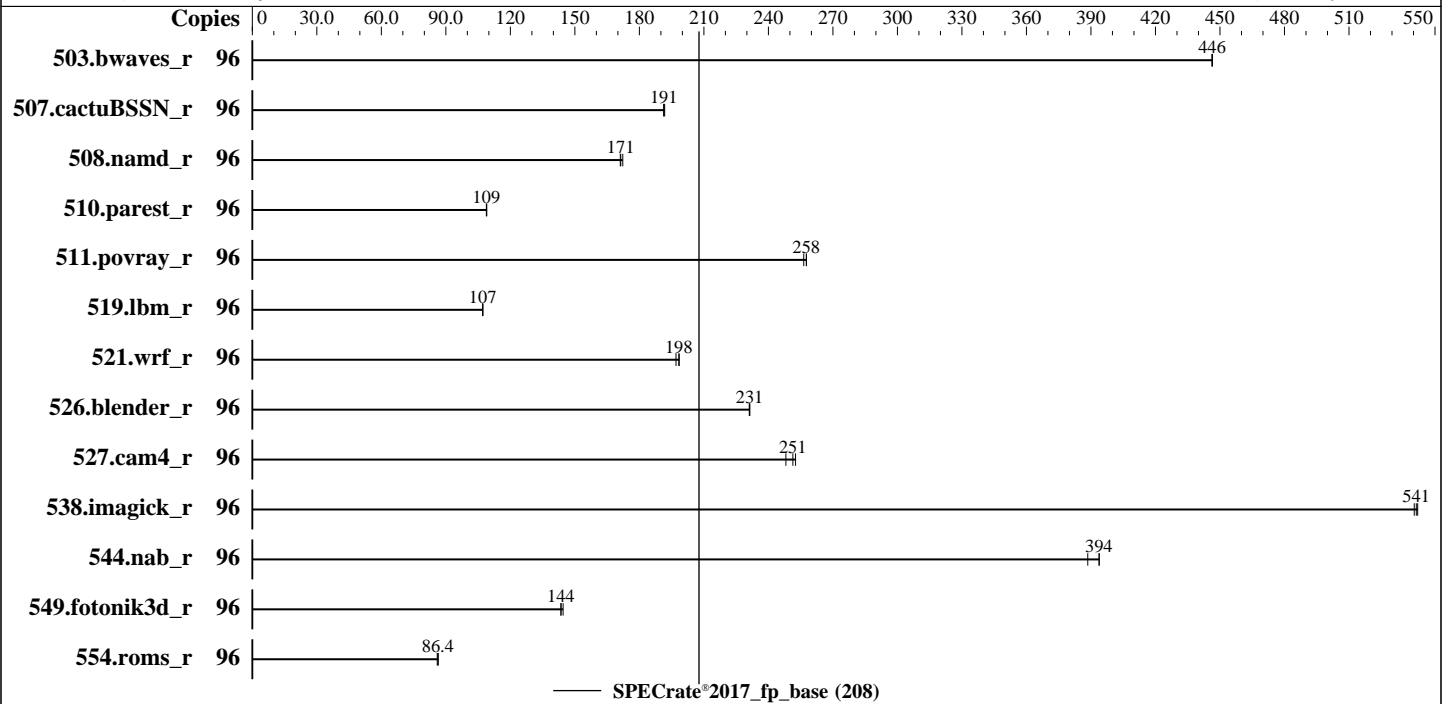

### Hardware

CPU Name: Intel Xeon Gold 6262V  
 Max MHz: 3600  
 Nominal: 1900  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R,  
 running at 2400)  
 Storage: 1 x SATA M.2 SSD, 150 GB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
 4.12.14-25.28-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.15.0 for D3384-B1x,  
 released Oct-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6262V,  
1.90 GHz

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2019  
Hardware Availability: May-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	2157	446	<u>2157</u>	<u>446</u>	2156	447							
507.cactuBSSN_r	96	635	191	634	192	<u>635</u>	<u>191</u>							
508.namd_r	96	533	171	529	172	<u>532</u>	<u>171</u>							
510.parest_r	96	<u>2307</u>	<u>109</u>	2307	109	2303	109							
511.povray_r	96	<u>870</u>	<u>258</u>	870	258	874	256							
519.lbm_r	96	944	107	<u>944</u>	<u>107</u>	945	107							
521.wrf_r	96	1091	197	<u>1084</u>	<u>198</u>	1083	199							
526.blender_r	96	<u>632</u>	<u>231</u>	633	231	632	231							
527.cam4_r	96	<u>668</u>	<u>251</u>	677	248	665	253							
538.imagick_r	96	441	542	442	540	<u>441</u>	<u>541</u>							
544.nab_r	96	<u>410</u>	<u>394</u>	410	394	416	389							
549.fotonik3d_r	96	2589	145	<u>2606</u>	<u>144</u>	2607	144							
554.roms_r	96	<u>1766</u>	<u>86.4</u>	1765	86.4	1774	86.0							

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-95  
Process tuning settings:  
echo 10000000 > /proc/sys/kernel/sched\_min\_granularity\_ns

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/SPECCPU2017-1.1.0/lib/intel64"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/SPECCPU2017-1.1.0/lib/intel64"

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6262V, 1.90 GHz

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

LLC Dead Line Alloc = Disabled

LLC prefetch = Enabled

Patrol Scrub = Disabled

WR CRC feature Control = Disabled

Fan Control = Full

Sysinfo program /home/Benchmark/SPEC CPU2017-1.1.0/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-871b Mon Dec 2 03:23:59 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6262V, 1.90 GHz

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

Byte Order:           Little Endian
CPU(s):               96
On-line CPU(s) list: 0-95
Thread(s) per core:  2
Core(s) per socket:  24
Socket(s):            2
NUMA node(s):        4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz
Stepping:             7
CPU MHz:              1900.000
CPU max MHz:          3600.0000
CPU min MHz:          800.0000
BogoMIPS:             3800.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             33792K
NUMA node0 CPU(s):   0-2,6-8,12-14,18-20,48-50,54-56,60-62,66-68
NUMA node1 CPU(s):   3-5,9-11,15-17,21-23,51-53,57-59,63-65,69-71
NUMA node2 CPU(s):   24-26,30-32,36-38,42-44,72-74,78-80,84-86,90-92
NUMA node3 CPU(s):   27-29,33-35,39-41,45-47,75-77,81-83,87-89,93-95
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 48 49 50 54 55 56 60 61 62 66 67 68
node 0 size: 192046 MB
node 0 free: 191659 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6262V,  
1.90 GHz

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 51 52 53 57 58 59 63 64 65 69 70 71
node 1 size: 193531 MB
node 1 free: 193211 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 72 73 74 78 79 80 84 85 86 90 91 92
node 2 size: 193502 MB
node 2 free: 193254 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 75 76 77 81 82 83 87 88 89 93 94 95
node 3 size: 193529 MB
node 3 free: 193280 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

```

From /proc/meminfo
MemTotal:      791152648 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

```

```

uname -a:
Linux linux-871b 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Vulnerable
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB: conditional,
                                           RSB filling

```

run-level 3 Dec 2 03:19

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6262V,  
1.90 GHz

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

SPEC is set to: /home/Benchmark/SPECCPU2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xf	140G	42G	98G	30%	/

From /sys/devices/virtual/dmi/id

BIOS: FUJITSU // American Megatrends Inc. V5.0.0.14 R1.15.0 for D3384-B1x  
10/17/2019

Vendor: FUJITSU  
Product: PRIMERGY RX2540 M5  
Product Family: SERVER  
Serial: YMSQXXXXXX

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2400

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6262V,  
1.90 GHz

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6262V,  
1.90 GHz

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M5, Intel Xeon Gold 6262V,  
1.90 GHz

SPECrate®2017\_fp\_base = 208

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Dec-2019

**Hardware Availability:** May-2019

**Software Availability:** May-2019

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-01 13:23:58-0500.

Report generated on 2020-01-08 12:07:56 by CPU2017 PDF formatter v6255.

Originally published on 2020-01-07.