



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2020

Hardware Availability: Jan-2020

Software Availability: May-2020

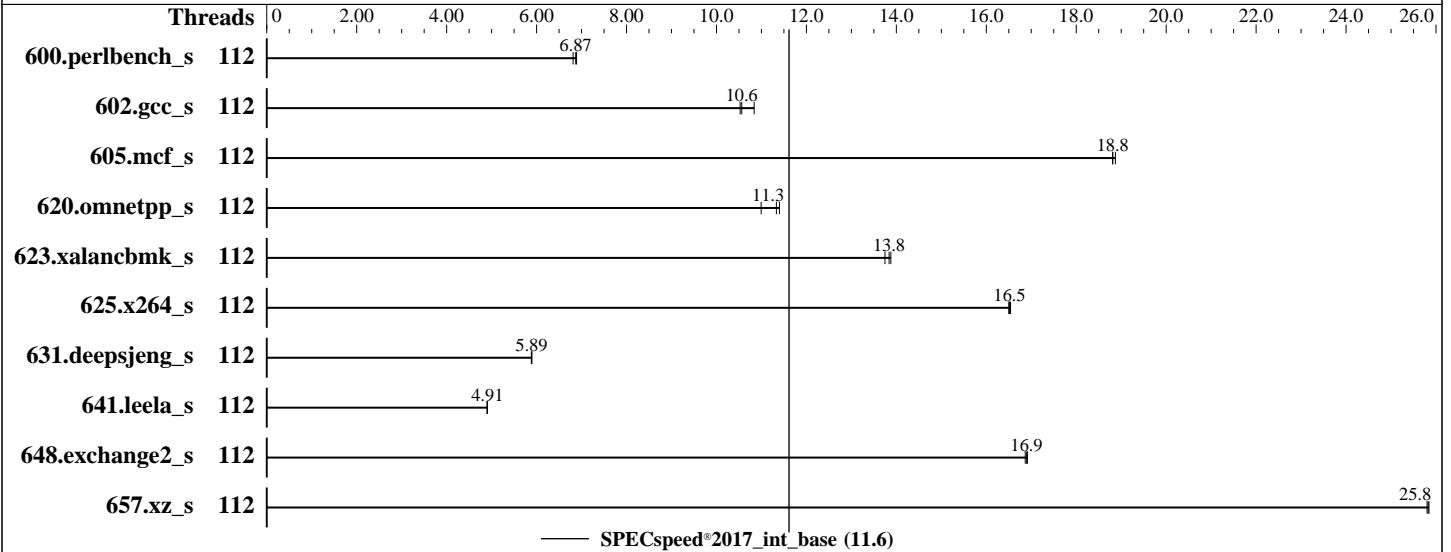

### Hardware

CPU Name: Intel Xeon Platinum 8276L  
 Max MHz: 4000  
 Nominal: 2200  
 Enabled: 112 cores, 4 chips  
 Orderable: 4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
 Kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version TEE156L 2.61 released May-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** May-2020

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	112	261	6.81	<b><u>258</u></b>	<b><u>6.87</u></b>	258	6.89									
602.gcc_s	112	<b><u>377</u></b>	<b><u>10.6</u></b>	378	10.5	367	10.8									
605.mcf_s	112	250	18.9	251	18.8	<b><u>251</u></b>	<b><u>18.8</u></b>									
620.omnetpp_s	112	143	11.4	<b><u>144</u></b>	<b><u>11.3</u></b>	148	11.0									
623.xalancbmk_s	112	102	13.9	<b><u>102</u></b>	<b><u>13.8</u></b>	103	13.7									
625.x264_s	112	<b><u>107</u></b>	<b><u>16.5</u></b>	107	16.5	107	16.5									
631.deepsjeng_s	112	244	5.88	<b><u>243</u></b>	<b><u>5.89</u></b>	243	5.90									
641.leela_s	112	<b><u>348</u></b>	<b><u>4.91</u></b>	348	4.90	348	4.91									
648.exchange2_s	112	<b><u>174</u></b>	<b><u>16.9</u></b>	174	16.9	174	16.9									
657.xz_s	112	<b><u>239</u></b>	<b><u>25.8</u></b>	239	25.8	240	25.8									

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.0-ic19.1.1/lib/intel64:/home/cpu2017-1.1.0-ic19.1.1/j  
e5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 11.6

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: May-2020

### General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
 Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
 MONITOR/MWAIT set to Enable  
 Hyper-Threading set to Disable  
 DCU Streamer Prefetcher set to Disable  
 Patrol Scrub set to Disable  
 LLC dead line alloc set to Disable

```
Sysinfo program /home/cpu2017-1.1.0-ic19.1.1/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-qjkl Sat Aug 22 14:16:27 2020
```

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHZ
 4 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 11.6

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** May-2020

### Platform Notes (Continued)

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:          46 bits physical, 48 bits virtual
CPU(s):                112
On-line CPU(s) list:   0-111
Thread(s) per core:    1
Core(s) per socket:    28
Socket(s):              4
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
Stepping:               6
CPU MHz:                2200.000
CPU max MHz:            4000.0000
CPU min MHz:            1000.0000
BogoMIPS:               4400.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0-27
NUMA node1 CPU(s):     28-55
NUMA node2 CPU(s):     56-83
NUMA node3 CPU(s):     84-111
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good noopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 11.6

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: May-2020

### Platform Notes (Continued)

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 386681 MB
node 0 free: 386339 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 387066 MB
node 1 free: 386667 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 387066 MB
node 2 free: 386224 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 387035 MB
node 3 free: 386527 MB
node distances:
node  0  1  2  3
0:  10  21  21  21
1:  21  10  21  21
2:  21  21  10  21
3:  21  21  21  10

```

```

From /proc/meminfo
MemTotal:      1584998092 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

```

uname -a:
Linux linux-qjkl 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 11.6

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: May-2020

### Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected  
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
 CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Aug 22 12:01

SPEC is set to: /home/cpu2017-1.1.0-ic19.1.1  

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	892G	32G	860G	4%	/

From /sys/devices/virtual/dmi/id  
 BIOS: Lenovo -[TEE156L-2.61]- 05/20/2020  
 Vendor: Lenovo  
 Product: ThinkSystem SR850P -[7D2HCTO1WW]-  
 Product Family: ThinkSystem  
 Serial: 1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
 48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
          | 625.x264_s(base) 657.xz_s(base)
=====

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
 NextGen Build 20200304  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
C++       | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
          | 641.leela_s(base)
=====

```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
 NextGen Build 20200304

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2020

**Hardware Availability:** Jan-2020

**Software Availability:** May-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
Fortran | 648.exchange2\_s(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_int\_base = 11.6

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Aug-2020

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jan-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2020

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fuse-ld=gold -qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse  
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -xCORE-AVX512  
-O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-08-22 02:16:27-0400.

Report generated on 2020-09-15 14:35:45 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-15.