



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358


Test Date: Jan-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

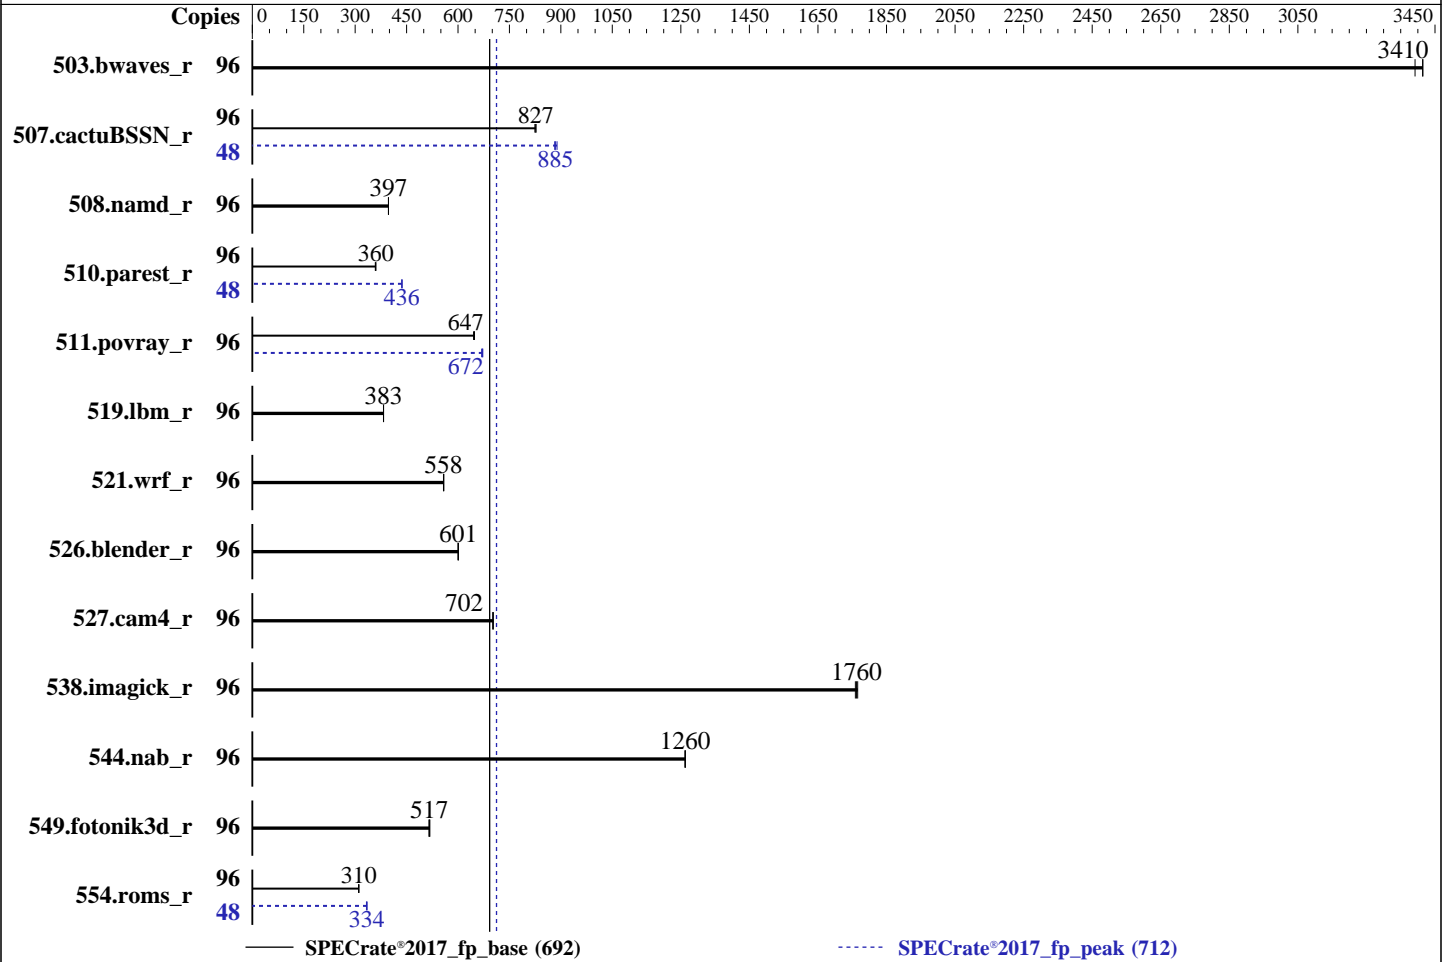

Hardware

CPU Name: Intel Xeon Gold 6542Y
 Max MHz: 4100
 Nominal: 2900
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC5-5600B-R, running at 5200)
 Storage: 1 x 1.92 TB NVME SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 05.13.00 released Nov-2023
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	284	3390	282	3410	<u>282</u>	<u>3410</u>	96	284	3390	282	3410	<u>282</u>	<u>3410</u>
507.cactuBSSN_r	96	<u>147</u>	<u>827</u>	147	827	147	824	48	68.9	882	<u>68.7</u>	<u>885</u>	68.4	889
508.namd_r	96	<u>230</u>	<u>397</u>	230	397	230	397	96	<u>230</u>	<u>397</u>	230	397	230	397
510.parest_r	96	697	360	700	359	<u>698</u>	<u>360</u>	48	288	436	<u>288</u>	<u>436</u>	288	436
511.povray_r	96	<u>346</u>	<u>647</u>	347	645	346	648	96	333	672	<u>334</u>	<u>672</u>	335	669
519.lbm_r	96	<u>264</u>	<u>383</u>	264	383	264	383	96	<u>264</u>	<u>383</u>	264	383	264	383
521.wrf_r	96	386	558	385	559	<u>386</u>	<u>558</u>	96	386	558	385	559	<u>386</u>	<u>558</u>
526.blender_r	96	<u>243</u>	<u>601</u>	244	600	243	601	96	<u>243</u>	<u>601</u>	244	600	243	601
527.cam4_r	96	239	703	239	702	<u>239</u>	<u>702</u>	96	239	703	239	702	<u>239</u>	<u>702</u>
538.imagick_r	96	135	1770	136	1760	<u>135</u>	<u>1760</u>	96	135	1770	136	1760	<u>135</u>	<u>1760</u>
544.nab_r	96	128	1260	128	1260	<u>128</u>	<u>1260</u>	96	128	1260	128	1260	<u>128</u>	<u>1260</u>
549.fotonik3d_r	96	<u>724</u>	<u>517</u>	726	515	722	518	96	<u>724</u>	<u>517</u>	726	515	722	518
554.roms_r	96	492	310	<u>491</u>	<u>310</u>	491	311	48	229	333	228	335	<u>228</u>	<u>334</u>

SPECrate®2017_fp_base = **692**

SPECrate®2017_fp_peak = **712**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Date: Jan-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to SNC2

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Jan 22 08:07:31 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
08:07:31 up 5:09, 1 user, load average: 54.68, 85.19, 91.51
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
root      tty1      -                02:58      5:08m  1.69s  0.04s  -bash
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062240
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 2062240
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.011/tempslogs/preenv.fprate.011.0.log --lognum 011.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) GOLD 6542Y
vendor_id      : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x21000161
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 24
siblings        : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0:  core ids 0-23
physical id 1:  core ids 0-23
physical id 0:  apicids 0-47
physical id 1:  apicids 128-175
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) GOLD 6542Y
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
Stepping:               2
CPU max MHz:           4100.0000
CPU min MHz:           800.0000
BogoMIPS:               5800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                        hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities

L1d cache:             2.3 MiB (48 instances)
L1i cache:             1.5 MiB (48 instances)
L2 cache:              96 MiB (48 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-11,48-59
NUMA node1 CPU(s):    12-23,60-71
NUMA node2 CPU(s):    24-35,72-83
NUMA node3 CPU(s):    36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 128584 MB
node 0 free: 115740 MB
node 1 cpus: 12-23,60-71
node 1 size: 129017 MB
node 1 free: 118630 MB
node 2 cpus: 24-35,72-83
node 2 size: 128983 MB
node 2 free: 117982 MB
node 3 cpus: 36-47,84-95
node 3 size: 128997 MB
node 3 free: 118549 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527957244 kB

10. who -r

run-level 3 Jan 22 02:58

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        apparmor auditd cron getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections
                postfix purge-kernels rollback systemd-pstore wickedd wickedd-auto4 wickedd-dhcp4
                wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                exchange-bmc-os-info grub2-once haveged haveged-switch-root ipmievd issue-add-ssh-keys
                kexec-load lunmask nvme-fc-autoconnect rpmconfigcheck serial-getty@
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd
indirect       wickedd

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=e0c623aa-ee95-4c1b-a983-a707e455061f
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

15. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

16. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

17. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5
```

18. Disk information

```
SPEC is set to: /home/CPU2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 btrfs 891G 93G 798G 11% /home
```

19. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

Vendor: IEIT
Product: NF5180-M7-A0-R0-00
Product Family: Not specified
Serial: 000000000

20. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R4GA3PB0-CWMCH 32 GB 2 rank 5600

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 05.13.00
BIOS Date: 11/30/2023

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Date: Jan-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Date: Jan-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapfirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.4.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 692

NF5180M7 (Intel Xeon Gold 6542Y)

SPECrate®2017_fp_peak = 712

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-22 08:07:31-0500.

Report generated on 2024-02-14 12:24:15 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-14.