



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 542

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

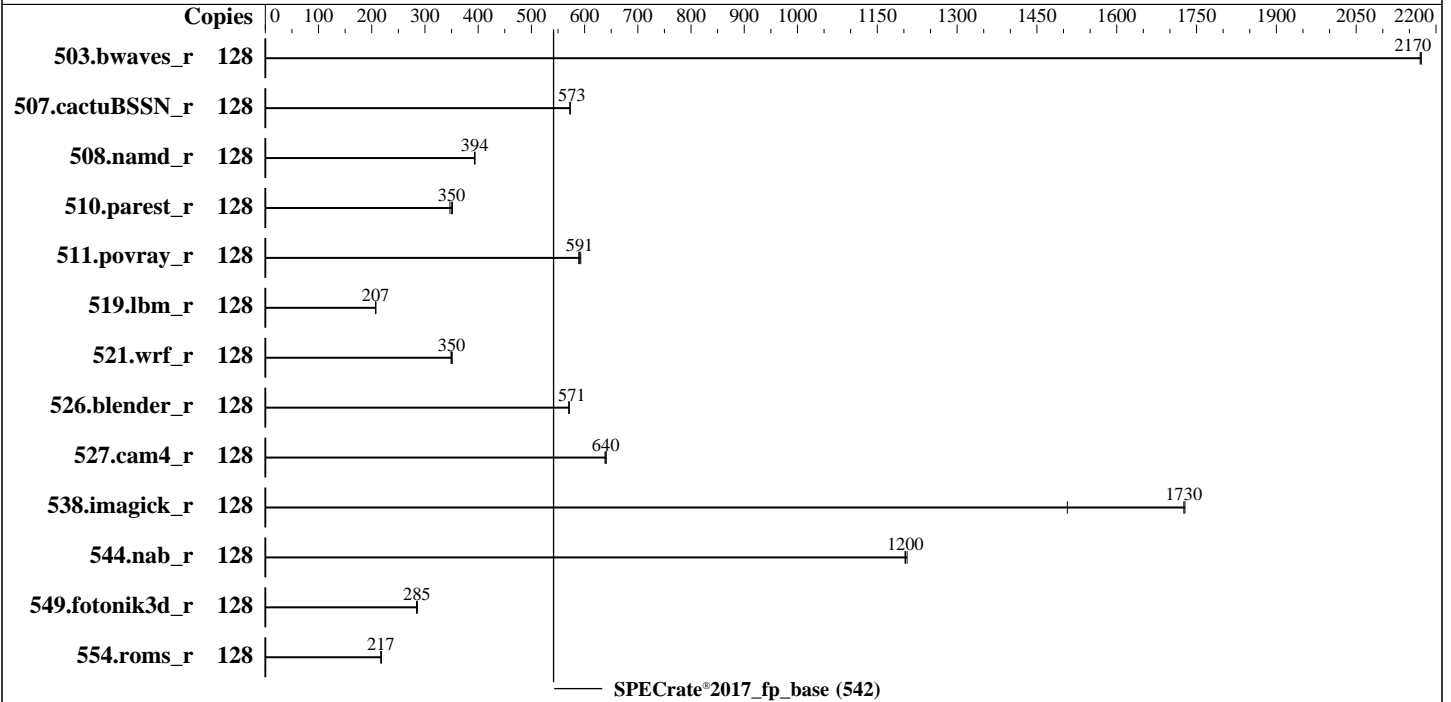

### Hardware

CPU Name: Intel Xeon Platinum 8592V  
 Max MHz: 3900  
 Nominal: 2000  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 320 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 1 x 960 GB M.2 NVME SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Lenovo BIOS Version FNE113F 2.20 released Jan-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 542

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Mar-2024  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	591	2170	591	2170	<u>591</u>	<u>2170</u>							
507.cactuBSSN_r	128	283	573	<u>283</u>	<u>573</u>	283	573							
508.namd_r	128	309	394	309	394	<u>309</u>	<u>394</u>							
510.parest_r	128	965	347	952	352	<u>956</u>	<u>350</u>							
511.povray_r	128	504	593	507	589	<u>506</u>	<u>591</u>							
519.lbm_r	128	651	207	650	208	<u>651</u>	<u>207</u>							
521.wrf_r	128	<u>819</u>	<u>350</u>	816	351	822	349							
526.blender_r	128	342	571	<u>342</u>	<u>571</u>	342	571							
527.cam4_r	128	351	638	350	641	<u>350</u>	<u>640</u>							
538.imagick_r	128	211	1510	184	1730	<u>184</u>	<u>1730</u>							
544.nab_r	128	179	1210	179	1200	<u>179</u>	<u>1200</u>							
549.fotonik3d_r	128	<u>1750</u>	<u>285</u>	1756	284	1747	285							
554.roms_r	128	936	217	933	218	<u>935</u>	<u>217</u>							

SPECrate®2017\_fp\_base = 542

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 542

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Jan-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2023

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
C-States set to Legacy  
SNC set to SNC2  
LLC Prefetch set to Disabled  
AMP Prefetch set to Enable

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Jan 31 08:51:40 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
08:51:40 up 2 min, 1 user, load average: 0.04, 0.04, 0.01  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 542

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

### Platform Notes (Continued)

```
root      tty1      -                08:51   12.00s  0.81s  0.01s -bash
```

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 2062498
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 2062498
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.530/templogs/preenv.fprate.530.0.log --lognum 530.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3
```

-----  
6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) PLATINUM 8592V
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x21000200
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 64
siblings        : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-127
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_base = 542

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Mar-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) PLATINUM 8592V
CPU family:            6
Model:                 207
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):             1
Stepping:              2
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512v1
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

```

```

Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              320 MiB (1 instance)
NUMA node(s):         2
NUMA node0 CPU(s):    0-31,64-95
NUMA node1 CPU(s):    32-63,96-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL   SETS PHY-LINE COHERENCY-SIZE

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_base = 542

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024

**Hardware Availability:** Mar-2024

**Software Availability:** Dec-2023

### Platform Notes (Continued)

L1d	48K	3M	12 Data	1	64	1	64
L1i	32K	2M	8 Instruction	1	64	1	64
L2	2M	128M	16 Unified	2	2048	1	64
L3	320M	320M	20 Unified	3	262144	1	64

#### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 257661 MB
node 0 free: 256669 MB
node 1 cpus: 32-63,96-127
node 1 size: 257993 MB
node 1 free: 257148 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10

```

#### 9. /proc/meminfo

MemTotal: 528030176 kB

#### 10. who -r

run-level 3 Jan 31 08:50

#### 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

#### 12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback
rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rpcbind
rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd
indirect wickedd

```

#### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=f243a704-c613-4a2e-b642-e5754787f2a2
splash=silent
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 542

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Mar-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

14. cpupower frequency-info
    analyzing CPU 0:
        Unable to determine current policy
        boost state support:
            Supported: yes
            Active: yes

-----

15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

-----

16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+advise [advise] never
enabled        [always] advise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

-----

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

-----

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs   893G  29G  864G  4% /

-----

20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_base = 542

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Mar-2024

Software Availability: Dec-2023

### Platform Notes (Continued)

Product: ThinkSystem SD530 V3  
Product Family: ThinkSystem  
Serial: PASDVMK006

#### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

##### Memory:

3x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4800  
5x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4800

#### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: FNE113F-2.20  
BIOS Date: 01/02/2024  
BIOS Revision: 2.20  
Firmware Revision: 1.10

### Compiler Version Notes

C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 508.namd\_r(base) 510.parest\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray\_r(base) 526.blender\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 542

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Jan-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

-----  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

-----  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 542

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Jan-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2023

## Base Portability Flags (Continued)

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 542

ThinkSystem SD530 V3  
(2.00 GHz, Intel Xeon Platinum 8592V)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Jan-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

`-L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-30 19:51:39-0500.

Report generated on 2024-02-28 19:03:58 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.