



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

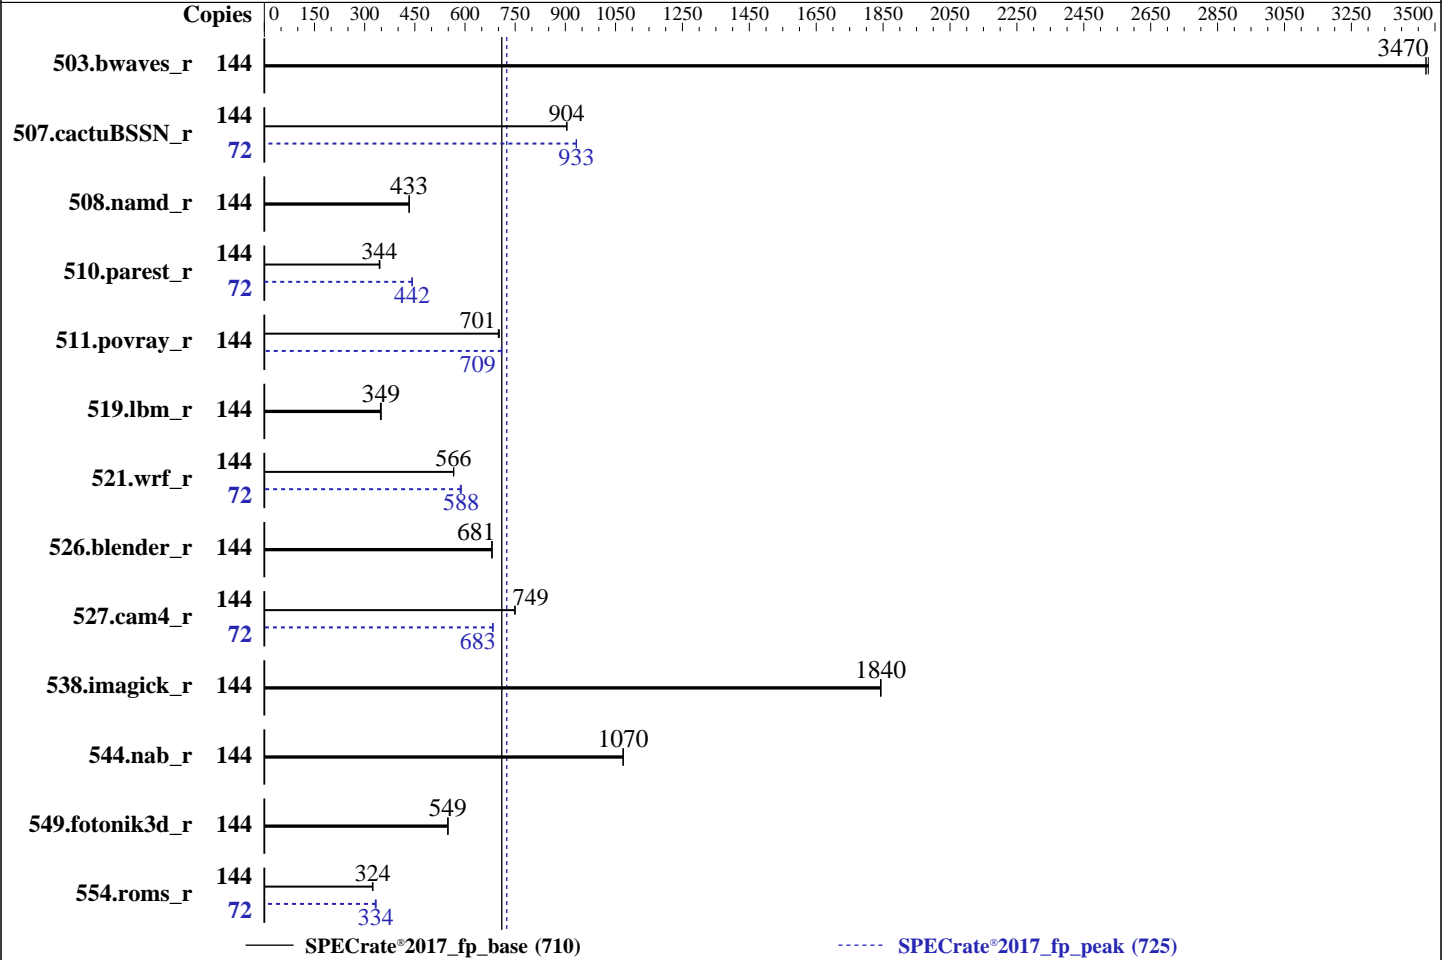

Hardware

CPU Name: Intel Xeon Platinum 8452Y
 Max MHz: 3200
 Nominal: 2000
 Enabled: 72 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 67.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 4.3.2d released Nov-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	415	3480	<u>416</u>	<u>3470</u>	416	3470	144	415	3480	<u>416</u>	<u>3470</u>	416	3470
507.cactuBSSN_r	144	<u>202</u>	<u>904</u>	202	904	202	905	72	<u>97.7</u>	<u>933</u>	97.7	933	97.7	933
508.namd_r	144	316	432	<u>316</u>	<u>433</u>	316	433	144	316	432	<u>316</u>	<u>433</u>	316	433
510.parest_r	144	1097	343	1090	346	<u>1094</u>	<u>344</u>	72	426	442	<u>426</u>	<u>442</u>	426	442
511.povray_r	144	479	702	<u>480</u>	<u>701</u>	481	700	144	474	709	474	710	<u>474</u>	<u>709</u>
519.lbm_r	144	437	347	<u>435</u>	<u>349</u>	435	349	144	437	347	<u>435</u>	<u>349</u>	435	349
521.wrf_r	144	570	566	<u>570</u>	<u>566</u>	570	566	72	274	588	275	586	<u>274</u>	<u>588</u>
526.blender_r	144	322	680	<u>322</u>	<u>681</u>	322	681	144	322	680	<u>322</u>	<u>681</u>	322	681
527.cam4_r	144	<u>336</u>	<u>749</u>	336	750	337	748	72	184	683	<u>184</u>	<u>683</u>	184	683
538.imagick_r	144	194	1840	194	1840	<u>194</u>	<u>1840</u>	144	194	1840	194	1840	<u>194</u>	<u>1840</u>
544.nab_r	144	226	1070	<u>226</u>	<u>1070</u>	226	1070	144	226	1070	<u>226</u>	<u>1070</u>	226	1070
549.fotonik3d_r	144	<u>1022</u>	<u>549</u>	1022	549	1023	549	144	<u>1022</u>	<u>549</u>	1022	549	1023	549
554.roms_r	144	708	323	<u>706</u>	<u>324</u>	705	325	72	<u>343</u>	<u>334</u>	343	334	345	332

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetcher set to Enabled
DCU streamer Prefetch set to Enabled
Enhanced CPU Performance set to Auto
LLC Dead Line set to Disabled
ADDDC Sparing set to Disabled
Processor C6 Report set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Feb 3 09:51:34 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
09:51:34 up 1 min, 1 user, load average: 1.02, 0.51, 0.19
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root      tty1     -             09:51      6.00s      1.47s      0.24s      -bash
```

3. Username
From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	4126769
max locked memory	(kbytes, -l)	64
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	4126769
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --action=build --action validate --define default-platform-flags --define numcopies=144 -c
ic2023.2.3-lin-core-avx512-rate-20231121.cfg --reportable --iterations 3 --define smt-on --define cores=72
--define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all fprate
runcpu --action build --action validate --define default-platform-flags --define numcopies=144 --configfile
ic2023.2.3-lin-core-avx512-rate-20231121.cfg --reportable --iterations 3 --define smt-on --define cores=72
--define physicalfirst --define invoke_with_interleave --define drop_caches --tune all --output_format all
--nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.065/templogs/preenv.fprate.065.0.log --lognum 065.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) Platinum 8452Y
vendor_id	: GenuineIntel
cpu family	: 6
model	: 143
stepping	: 8
microcode	: 0x2b0004b1
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores	: 36
siblings	: 72
2 physical ids (chips)	
144 processors (hardware threads)	
physical id 0:	core ids 0-35
physical id 1:	core ids 0-35
physical id 0:	apicids 0-71

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

physical id 1: apicids 128-199

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 144
On-line CPU(s) list:   0-143
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8452Y
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    36
Socket(s):              2
Stepping:               8
CPU max MHz:           3200.0000
CPU min MHz:           800.0000
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                        tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
                        avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                        sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsavec cqm_llc
                        cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                        hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache:             3.4 MiB (72 instances)
L1i cache:             2.3 MiB (72 instances)
L2 cache:              144 MiB (72 instances)
L3 cache:              135 MiB (2 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-8,72-80
NUMA node1 CPU(s):    9-17,81-89
NUMA node2 CPU(s):    18-26,90-98
NUMA node3 CPU(s):    27-35,99-107
NUMA node4 CPU(s):    36-44,108-116
NUMA node5 CPU(s):    45-53,117-125
NUMA node6 CPU(s):    54-62,126-134
NUMA node7 CPU(s):    63-71,135-143
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	67.5M	135M	15	Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-8,72-80
node 0 size: 128662 MB
node 0 free: 126770 MB
node 1 cpus: 9-17,81-89
node 1 size: 129019 MB
node 1 free: 128706 MB
node 2 cpus: 18-26,90-98
node 2 size: 129019 MB
node 2 free: 128800 MB
node 3 cpus: 27-35,99-107
node 3 size: 129019 MB
node 3 free: 128813 MB
node 4 cpus: 36-44,108-116
node 4 size: 129019 MB
node 4 free: 128768 MB
node 5 cpus: 45-53,117-125
node 5 size: 129019 MB
node 5 free: 128767 MB
node 6 cpus: 54-62,126-134
node 6 size: 129019 MB
node 6 free: 128801 MB
node 7 cpus: 63-71,135-143
node 7 size: 128938 MB
node 7 free: 128704 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. /proc/meminfo

MemTotal: 1056477508 kB

10. who -r

run-level 3 Feb 3 09:50

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi issue-generator kbdsettings klog libvirtd lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root ipmi ipmievld iscsi-init iscsid issue-add-ssh-keys kdump kdump-early kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server nfsserver nvmmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnservice systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtqemud virtsecretd virtstoraged
indirect	pcsd virtlockd virtlogd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=2b0c4aea-8b1a-49f8-af79-68404a8ed1d3
splash=silent
resume=/dev/disk/by-uuid/acc9eb67-bac8-42f3-9795-20ae507d267e
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.20 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.nr_overcommit_hugepages      0
vm.swappiness                    1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 741G 13G 728G 2% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Cisco Systems Inc
Product:     UCSC-C220-M7N
Serial:      WZP27010H2C

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
15x 0xCE00 M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
1x 0xCE00 M321R8GA0BB0-CQKMG 64 GB 2 rank 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Cisco Systems, Inc.
BIOS Version:     C220M7.4.3.2d.0.1101232037
BIOS Date:        11/01/2023
BIOS Revision:    5.31

```




SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
 507.cactuBSSN_r: -DSPEC_LP64
 508.namd_r: -DSPEC_LP64
 510.parest_r: -DSPEC_LP64
 511.povray_r: -DSPEC_LP64
 519.lbm_r: -DSPEC_LP64
 521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
 526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
 527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
 538.imagick_r: -DSPEC_LP64
 544.nab_r: -DSPEC_LP64
 549.fotonik3d_r: -DSPEC_LP64
 554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
 -Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
 -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8452Y, 2.00GHz)

SPECrate®2017_fp_base = 710

SPECrate®2017_fp_peak = 725

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

```
526.blender_r: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-03 09:51:34-0500.

Report generated on 2024-02-28 19:09:04 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.