



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2025

Hardware Availability: Nov-2023

Software Availability: Oct-2024

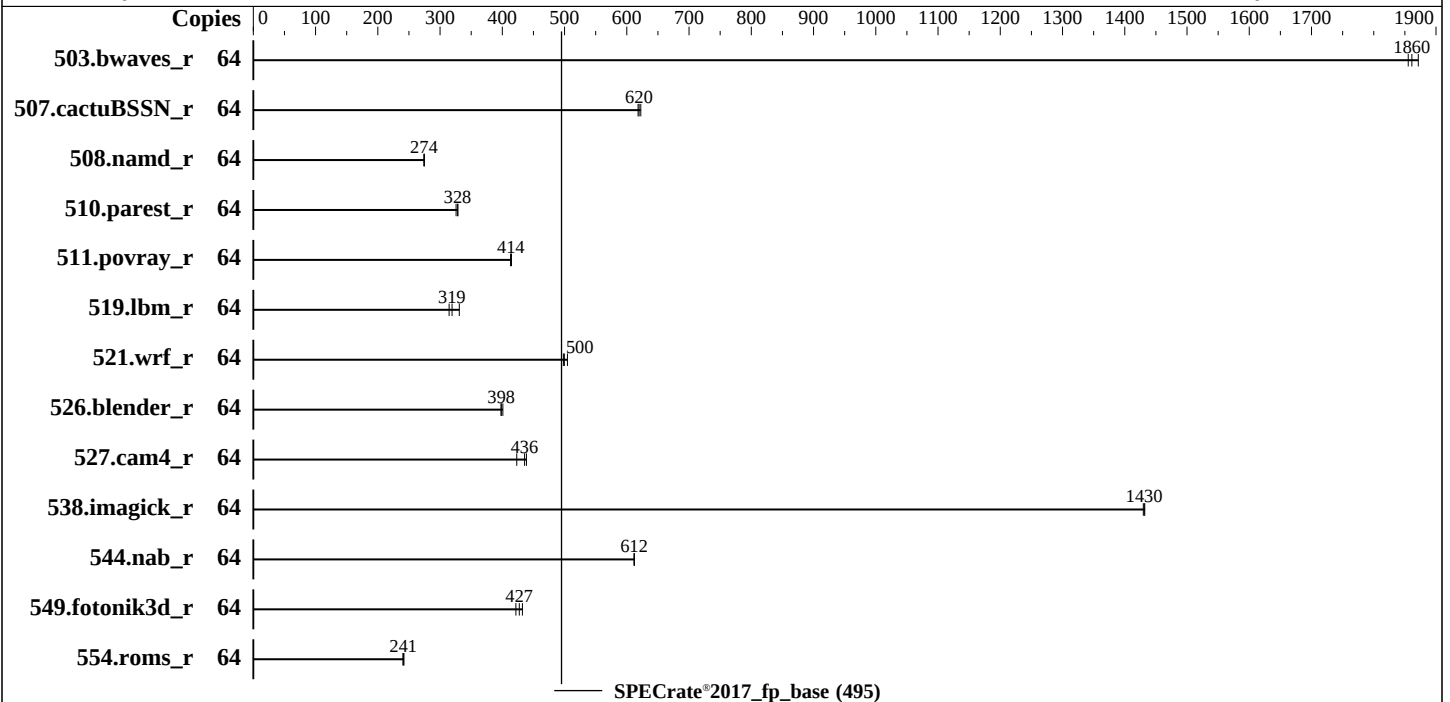

Hardware

CPU Name: AMD EPYC 9124
Max MHz: 3700
Nominal: 3000
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage: 1 x 240 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 2.11.17 released Aug-2025
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	346	1860	343	1870	<u>345</u>	<u>1860</u>							
507.cactuBSSN_r	64	<u>131</u>	<u>620</u>	130	622	131	618							
508.namd_r	64	222	274	<u>222</u>	<u>274</u>	221	275							
510.parest_r	64	514	326	<u>510</u>	<u>328</u>	510	329							
511.povray_r	64	<u>361</u>	<u>414</u>	360	415	362	413							
519.lbm_r	64	214	315	<u>211</u>	<u>319</u>	204	331							
521.wrf_r	64	<u>287</u>	<u>500</u>	284	505	288	498							
526.blender_r	64	243	401	<u>245</u>	<u>398</u>	245	398							
527.cam4_r	64	264	423	<u>257</u>	<u>436</u>	255	439							
538.imagick_r	64	111	1430	111	1430	<u>111</u>	<u>1430</u>							
544.nab_r	64	<u>176</u>	<u>612</u>	176	612	176	612							
549.fotonik3d_r	64	591	422	<u>584</u>	<u>427</u>	577	432							
554.roms_r	64	423	240	420	242	<u>422</u>	<u>241</u>							

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Operating System Notes (Continued)

'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:
TDP: 400
Determinism Enable set to Power
PPT: 400
NPS: 4

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Oct 30 08:26:40 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

```
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
08:26:40 up 2:24, 1 user, load average: 41.56, 58.40, 61.55
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -              06:02    1:40m  1.60s  0.14s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6189315
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6189315
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.026/temlogs/preenv.fprate.026.0.log --lognum 026.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

model name : AMD EPYC 9124 16-Core Processor
vendor_id : AuthenticAMD
cpu family : 25
model : 17
stepping : 1
microcode : 0xa101154
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size : 3584 4K pages
cpu cores : 16
siblings : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27
physical id 1: core ids 0-3,8-11,16-19,24-27
physical id 0: apicids 0-7,16-23,32-39,48-55
physical id 1: apicids 64-71,80-87,96-103,112-119

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: AuthenticAMD
BIOS Vendor ID: Advanced Micro Devices, Inc.
Model name: AMD EPYC 9124 16-Core Processor
BIOS Model name: AMD EPYC 9124 16-Core Processor Unknown CPU @ 3.0GHz
BIOS CPU family: 107
CPU family: 25
Model: 17
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 81%
CPU max MHz: 3711.9141
CPU min MHz: 1500.0000
BogoMIPS: 5990.86
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxt
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cппc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

Virtualization:

L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 32 MiB (32 instances)
L3 cache: 128 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 193082 MB
node 0 free: 191778 MB
node 1 cpus: 4-7,36-39
node 1 size: 193533 MB
node 1 free: 192469 MB
node 2 cpus: 8-11,40-43
node 2 size: 193533 MB
node 2 free: 192412 MB
node 3 cpus: 12-15,44-47
node 3 size: 193533 MB
node 3 free: 192393 MB
node 4 cpus: 16-19,48-51
node 4 size: 193495 MB
node 4 free: 192344 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

```
node 5 cpus: 20-23,52-55
node 5 size: 193533 MB
node 5 free: 192490 MB
node 6 cpus: 24-27,56-59
node 6 size: 193533 MB
node 6 free: 192500 MB
node 7 cpus: 28-31,60-63
node 7 size: 193109 MB
node 7 free: 192028 MB
node distances:
node  0  1  2  3  4  5  6  7
0: 10 12 12 12 32 32 32 32
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10
```

9. /proc/meminfo
MemTotal: 1584491120 kB

10. who -r
run-level 3 Oct 30 06:02

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd vncserver@
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=6a0e1725-852e-4de4-b169-0d120ff68381
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=364M,high
crashkernel=72M,low
nohz_full=1-63

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

14. cpupower frequency-info
analyzing CPU 38:
current policy: frequency should be within 1.50 GHz and 3.00 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 btrfs 219G 34G 182G 16% /home

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 2258 V7
Product Family: Genoa

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Micron Technology MTC40F2046S1RC56BD1 64 GB 2 rank 5600, configured at 4800
8x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 2.11.17
BIOS Date: 08/07/2025
BIOS Revision: 2.11

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 508.namd_r(base) 510.parest_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_fp_base = 495

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-30 08:26:40-0400.

Report generated on 2025-11-19 10:38:21 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-18.