



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint[®]2006 = 27.8

BL265
(Intel Xeon E5520, 2.27 GHz)

SPECint_base2006 = 24.6

CPU2006 license: 20


Test date: Jan-2010

Test sponsor: Bull SAS

Hardware Availability: May-2009

Tested by: Bull SAS

Software Availability: Feb-2009

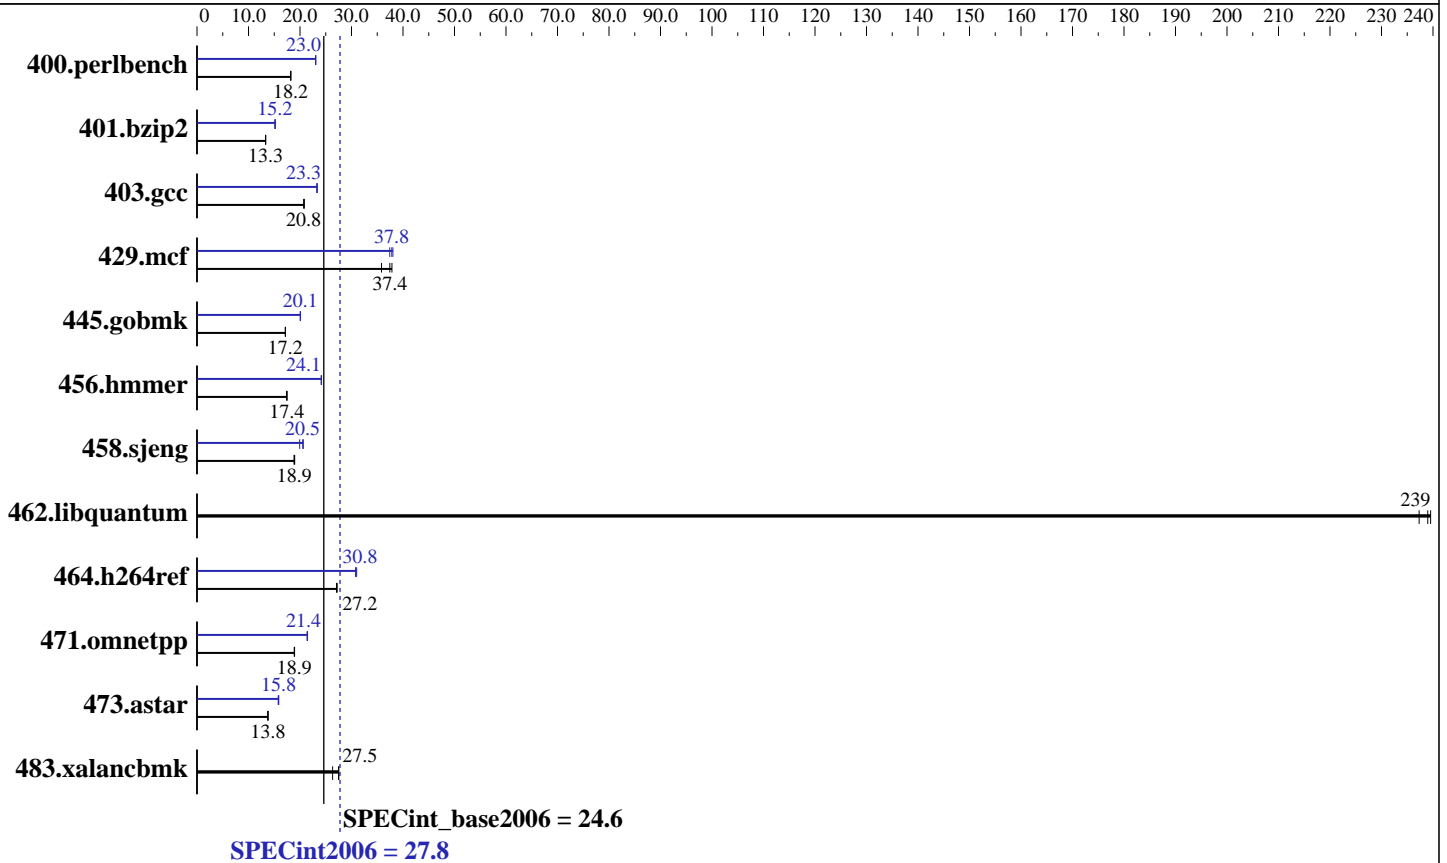

Hardware

CPU Name: Intel Xeon E5520
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5520, 2.27 GHz)

SPECint2006 = 27.8

SPECint_base2006 = 24.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	537	18.2	536	18.2	<u>537</u>	<u>18.2</u>	424	23.1	424	23.0	<u>424</u>	<u>23.0</u>
401.bzip2	724	13.3	<u>724</u>	<u>13.3</u>	725	13.3	<u>636</u>	<u>15.2</u>	637	15.1	635	15.2
403.gcc	<u>388</u>	<u>20.8</u>	387	20.8	388	20.7	<u>345</u>	<u>23.3</u>	345	23.3	346	23.3
429.mcf	255	35.8	241	37.9	<u>244</u>	<u>37.4</u>	<u>241</u>	<u>37.8</u>	244	37.4	240	38.0
445.gobmk	611	17.2	<u>611</u>	<u>17.2</u>	611	17.2	523	20.1	522	20.1	<u>523</u>	<u>20.1</u>
456.hammer	<u>535</u>	<u>17.4</u>	535	17.4	534	17.5	387	24.1	<u>387</u>	<u>24.1</u>	386	24.2
458.sjeng	642	18.8	<u>640</u>	<u>18.9</u>	638	19.0	<u>589</u>	<u>20.5</u>	607	19.9	586	20.6
462.libquantum	86.5	240	87.3	237	<u>86.7</u>	<u>239</u>	86.5	240	87.3	237	<u>86.7</u>	<u>239</u>
464.h264ref	<u>815</u>	<u>27.2</u>	817	27.1	814	27.2	714	31.0	719	30.8	<u>718</u>	<u>30.8</u>
471.omnetpp	331	18.9	<u>330</u>	<u>18.9</u>	330	18.9	291	21.5	292	21.4	<u>292</u>	<u>21.4</u>
473.astar	<u>510</u>	<u>13.8</u>	510	13.8	509	13.8	<u>443</u>	<u>15.8</u>	445	15.8	442	15.9
483.xalancbmk	262	26.3	<u>251</u>	<u>27.5</u>	250	27.5	262	26.3	<u>251</u>	<u>27.5</u>	250	27.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5520, 2.27 GHz)

SPECint2006 = 27.8

SPECint_base2006 = 24.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5520, 2.27 GHz)

SPECint2006 = 27.8

SPECint_base2006 = 24.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5520, 2.27 GHz)

SPECint2006 = 27.8

SPECint_base2006 = 24.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20100202.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20100202.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:44:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2010.