



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon L5520, 2.27 GHz)

SPECint®2006 = 27.7

SPECint_base2006 = 24.6

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2010

Hardware Availability: May-2009

Software Availability: Feb-2009

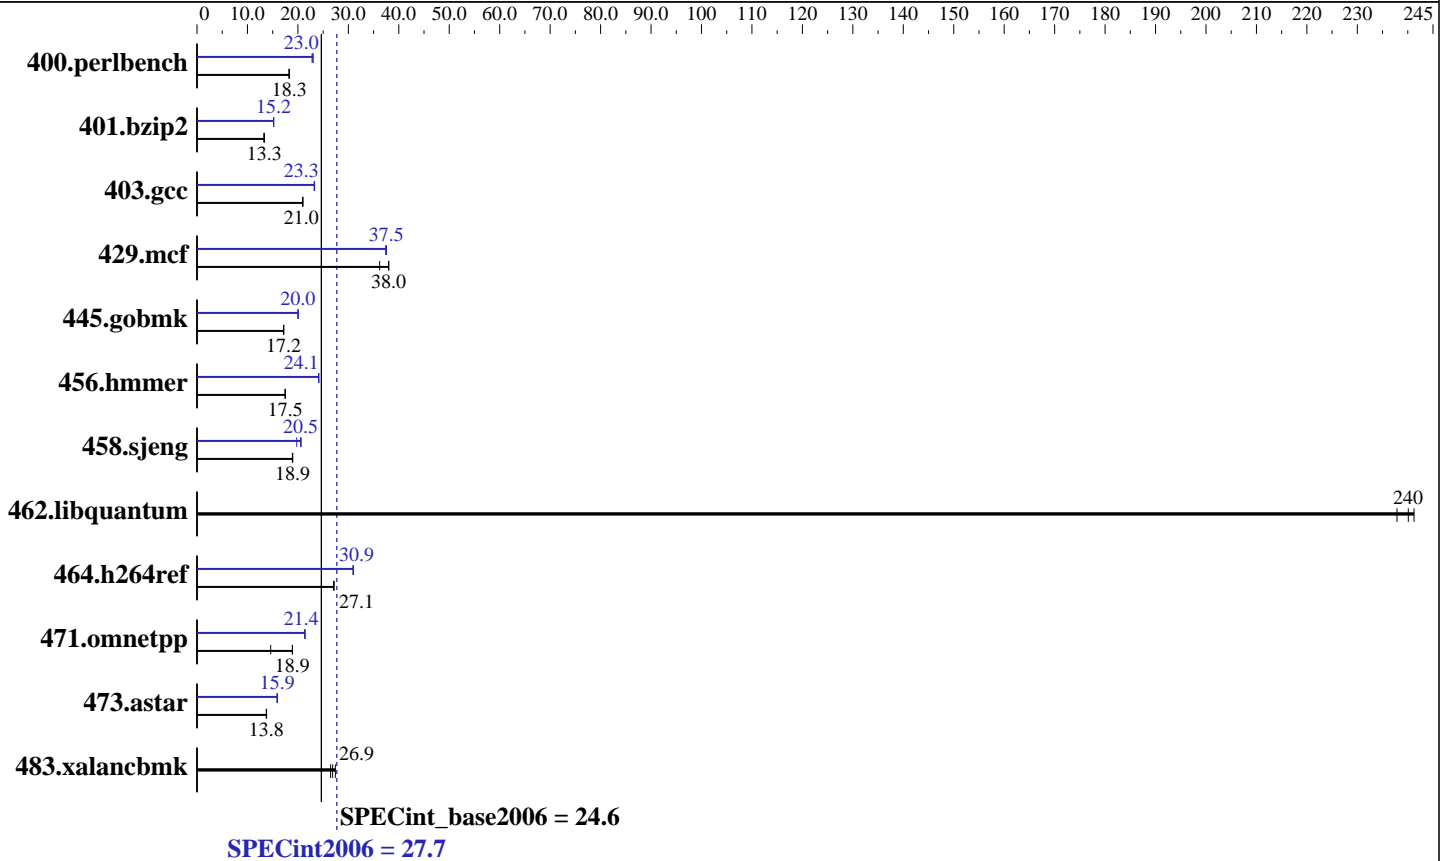

Hardware

CPU Name: Intel Xeon L5520
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon L5520, 2.27 GHz)

SPECint2006 = 27.7

SPECint_base2006 = 24.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	534	18.3	535	18.3	<u>535</u>	<u>18.3</u>	425	23.0	428	22.8	<u>425</u>	<u>23.0</u>
401.bzip2	727	13.3	723	13.3	<u>724</u>	<u>13.3</u>	635	15.2	635	15.2	<u>635</u>	<u>15.2</u>
403.gcc	383	21.0	<u>384</u>	<u>21.0</u>	385	20.9	345	23.3	<u>346</u>	<u>23.3</u>	347	23.2
429.mcf	252	36.2	240	38.0	<u>240</u>	<u>38.0</u>	243	37.5	<u>243</u>	<u>37.5</u>	244	37.4
445.gobmk	610	17.2	<u>611</u>	<u>17.2</u>	611	17.2	524	20.0	<u>524</u>	<u>20.0</u>	523	20.1
456.hammer	534	17.5	533	17.5	<u>533</u>	<u>17.5</u>	<u>387</u>	<u>24.1</u>	387	24.1	386	24.2
458.sjeng	640	18.9	638	19.0	<u>639</u>	<u>18.9</u>	<u>590</u>	<u>20.5</u>	612	19.8	586	20.7
462.libquantum	85.9	241	87.1	238	<u>86.3</u>	<u>240</u>	85.9	241	87.1	238	<u>86.3</u>	<u>240</u>
464.h264ref	814	27.2	<u>817</u>	<u>27.1</u>	817	27.1	<u>715</u>	<u>30.9</u>	715	30.9	714	31.0
471.omnetpp	<u>331</u>	<u>18.9</u>	428	14.6	330	18.9	292	21.4	293	21.3	<u>292</u>	<u>21.4</u>
473.astar	509	13.8	511	13.7	<u>510</u>	<u>13.8</u>	<u>442</u>	<u>15.9</u>	441	15.9	442	15.9
483.xalancbmk	252	27.4	<u>257</u>	<u>26.9</u>	261	26.5	252	27.4	<u>257</u>	<u>26.9</u>	261	26.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon L5520, 2.27 GHz)

SPECint2006 = 27.7

SPECint_base2006 = 24.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

icpc

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon L5520, 2.27 GHz)

SPECint2006 = 27.7

SPECint_base2006 = 24.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon L5520, 2.27 GHz)

SPECint2006 = 27.7

SPECint_base2006 = 24.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20100202.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20100202.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:48:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2010.