



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS


NovaScale R440 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint®2006 = 31.2

SPECint\_base2006 = 28.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: May-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

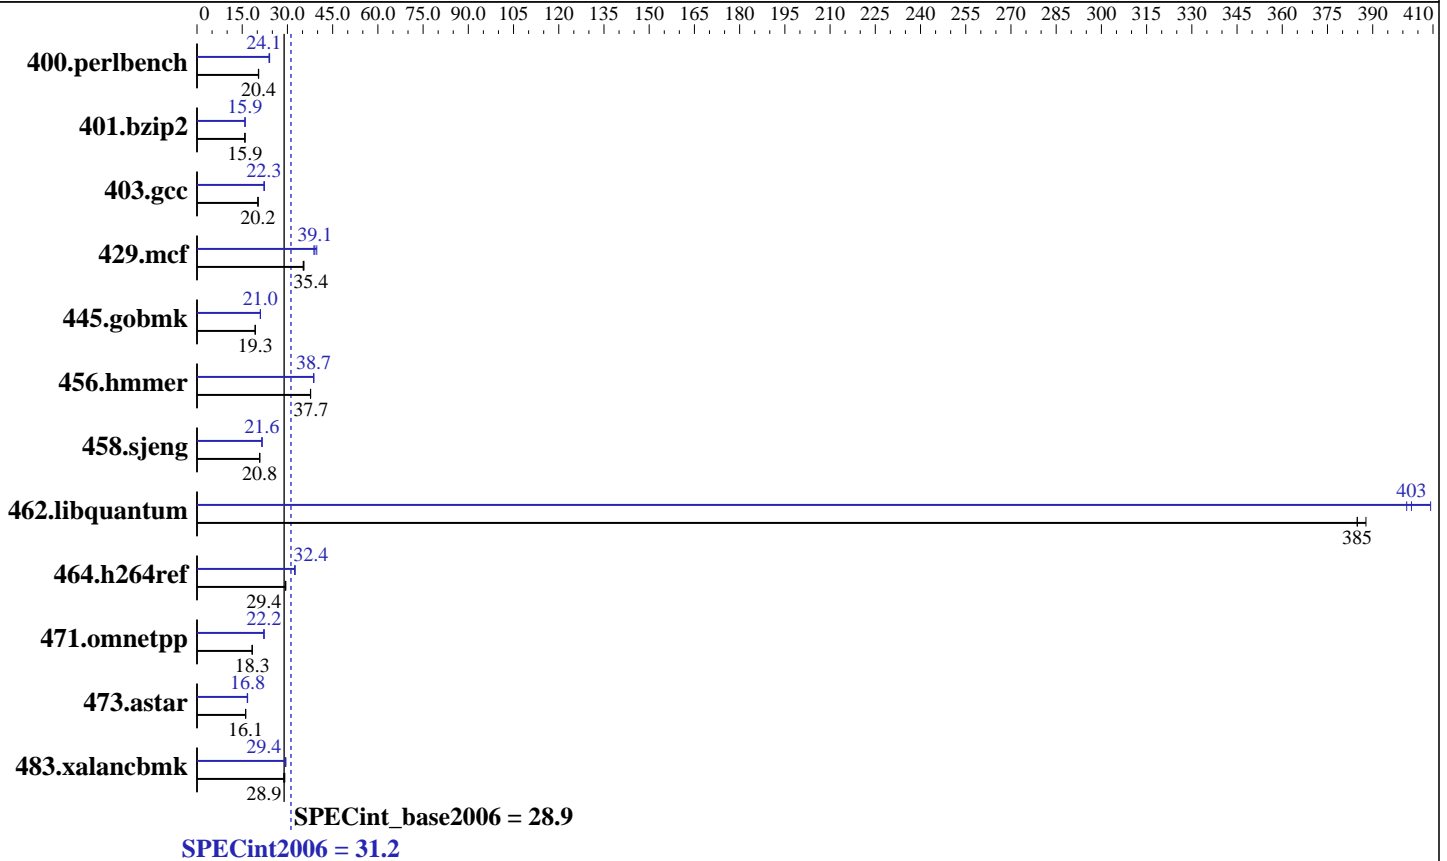

### Hardware

CPU Name: Intel Xeon E5530  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)  
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint2006 = 31.2

SPECint\_base2006 = 28.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: May-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	478	20.4	480	20.4	<b>478</b>	<b>20.4</b>	409	23.9	406	24.1	<b>406</b>	<b>24.1</b>
401.bzip2	606	15.9	<b>607</b>	<b>15.9</b>	608	15.9	<b>606</b>	<b>15.9</b>	605	16.0	606	15.9
403.gcc	397	20.3	398	20.2	<b>398</b>	<b>20.2</b>	<b>361</b>	<b>22.3</b>	361	22.3	362	22.2
429.mcf	257	35.5	259	35.2	<b>258</b>	<b>35.4</b>	235	38.8	230	39.7	<b>233</b>	<b>39.1</b>
445.gobmk	541	19.4	<b>543</b>	<b>19.3</b>	544	19.3	498	21.1	499	21.0	<b>499</b>	<b>21.0</b>
456.hammer	247	37.7	<b>248</b>	<b>37.7</b>	248	37.6	241	38.7	241	38.7	<b>241</b>	<b>38.7</b>
458.sjeng	581	20.8	<b>582</b>	<b>20.8</b>	583	20.8	<b>561</b>	<b>21.6</b>	562	21.5	561	21.6
462.libquantum	53.4	388	<b>53.8</b>	<b>385</b>	53.8	385	<b>51.4</b>	<b>403</b>	50.6	409	51.6	401
464.h264ref	<b>753</b>	<b>29.4</b>	752	29.4	754	29.3	681	32.5	<b>682</b>	<b>32.4</b>	682	32.4
471.omnetpp	340	18.4	<b>341</b>	<b>18.3</b>	342	18.3	<b>281</b>	<b>22.2</b>	281	22.2	282	22.2
473.astar	436	16.1	435	16.1	<b>435</b>	<b>16.1</b>	418	16.8	<b>419</b>	<b>16.8</b>	421	16.7
483.xalancbmk	239	28.8	<b>239</b>	<b>28.9</b>	237	29.1	234	29.4	<b>234</b>	<b>29.4</b>	235	29.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
The Dell PowerEdge R610 and  
the Bull NovaScale R440 F2 models are electronically equivalent.  
The results have been measured on a Bull NovaScale R440 F2 model.

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint2006 = 31.2

SPECint\_base2006 = 28.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: May-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Base Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
400.perlbench: icc -m32  
429.mcf: icc -m32  
445.gobmk: icc -m32  
464.h264ref: icc -m32  
C++ benchmarks (except as noted below):  
icpc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint2006 = 31.2

SPECint\_base2006 = 28.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: May-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Peak Compiler Invocation (Continued)

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)  
-auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint2006 = 31.2

SPECint\_base2006 = 28.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: May-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
              -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 08:15:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 June 2010.