



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6328

SPECint®2006 = 37.8

SPECint_base2006 = 30.7

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

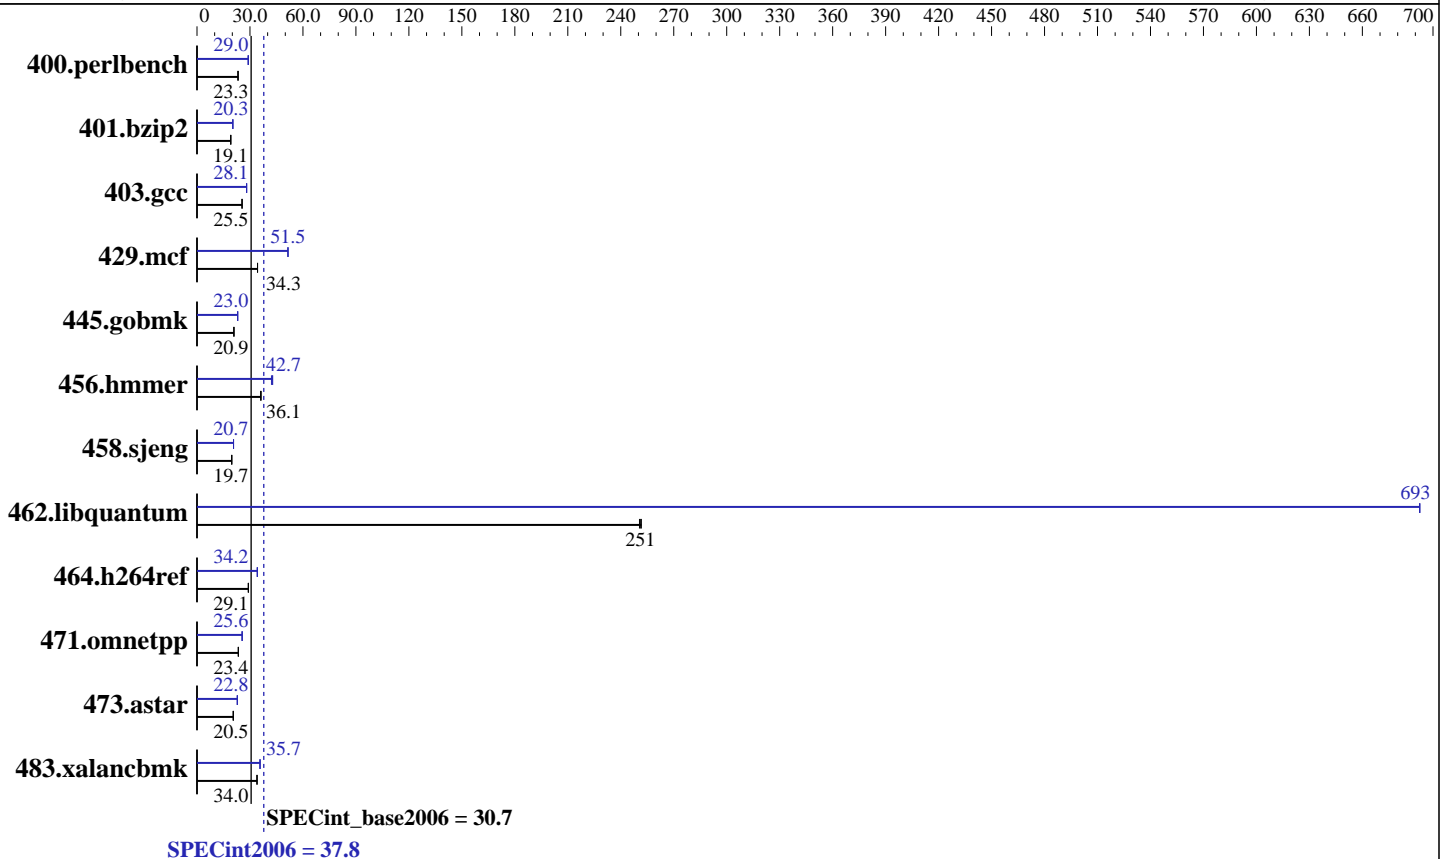

Hardware

CPU Name: AMD Opteron 6328
 CPU Characteristics: AMD Turbo CORE technology up to 3.80 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 256 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 4 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 256 GB SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.3,
Kernel 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6328

SPECint2006 = 37.8

SPECint_base2006 = 30.7

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>420</u>	<u>23.3</u>	419	23.3	422	23.1	336	29.1	337	29.0	<u>337</u>	<u>29.0</u>
401.bzip2	<u>505</u>	<u>19.1</u>	505	19.1	504	19.1	475	20.3	<u>475</u>	<u>20.3</u>	476	20.3
403.gcc	<u>315</u>	<u>25.5</u>	315	25.5	315	25.5	286	28.1	<u>286</u>	<u>28.1</u>	287	28.1
429.mcf	266	34.3	<u>266</u>	<u>34.3</u>	266	34.3	177	51.5	<u>177</u>	<u>51.5</u>	177	51.5
445.gobmk	<u>502</u>	<u>20.9</u>	502	20.9	502	20.9	455	23.0	<u>455</u>	<u>23.0</u>	455	23.1
456.hammer	<u>258</u>	<u>36.1</u>	257	36.3	259	36.1	<u>219</u>	<u>42.7</u>	218	42.9	221	42.2
458.sjeng	615	19.7	<u>615</u>	<u>19.7</u>	615	19.7	585	20.7	585	20.7	<u>585</u>	<u>20.7</u>
462.libquantum	82.3	252	<u>82.5</u>	<u>251</u>	82.7	251	<u>29.9</u>	<u>693</u>	29.9	693	29.9	692
464.h264ref	760	29.1	761	29.1	<u>761</u>	<u>29.1</u>	648	34.1	<u>648</u>	<u>34.2</u>	647	34.2
471.omnetpp	267	23.4	266	23.5	<u>267</u>	<u>23.4</u>	244	25.6	<u>244</u>	<u>25.6</u>	245	25.5
473.astar	341	20.6	342	20.5	<u>342</u>	<u>20.5</u>	307	22.8	<u>307</u>	<u>22.8</u>	307	22.8
483.xalancbmk	203	34.0	<u>203</u>	<u>34.0</u>	203	33.9	194	35.7	193	35.7	<u>193</u>	<u>35.7</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
cpuspeed stop was used to set the CPU frequency to its maximum.

Set vm/nr_hugepages=8000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "8000"
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-speed-libs-revA/32:/root/work/cpu2006v1.2/amd1104-speed-libs-revA/64"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31"
O64_OMP_SPIN_COUNT = "800000"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6328

SPECint2006 = 37.8

SPECint_base2006 = 30.7

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

General Notes (Continued)

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -CG:local_sched_alg=1 -CG:p2align=0
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bd=2m:heap=2m -LNO:prefetch=2

C++ benchmarks:

-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peek=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6328

SPECint2006 = 37.8

SPECint_base2006 = 30.7

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
 -IPA:plimit=20000 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
 -CG:load_exe=0 -CG:unroll_fb_req=on -CG:movext_icmp=off
 -HP:bdt=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
 -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
 -HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
 -INLINE:aggressive=on -CG:gcm=off
 -GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
 -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1
 -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bdt=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
 -OPT:alias=disjoint -OPT:unroll_times_max=16
 -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6328

SPECint2006 = 37.8

SPECint_base2006 = 30.7

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-CG:p2align=1 -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:bdt=2m:heap=2m -WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -OPT:unroll_size=512
-OPT:unroll_times_max=8 -LNO:prefetch=2 -LNO:pf2=0
-CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m,limit=450 -apo

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -CG:gcm=off
-INLINE:aggressive=on -WOPT:if_conv=0 -WOPT:sib=on -m32
-HP:bdt=2m:heap=2m

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=0 -GRA:optimize_boundary=on -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=0 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6328

SPECint2006 = 37.8

SPECint_base2006 = 30.7

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:59:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 January 2013.