



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M915
AMD Opteron 6386 SE

SPECfp[®]_rate2006 = 874

SPECfp_rate_base2006 = 781

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

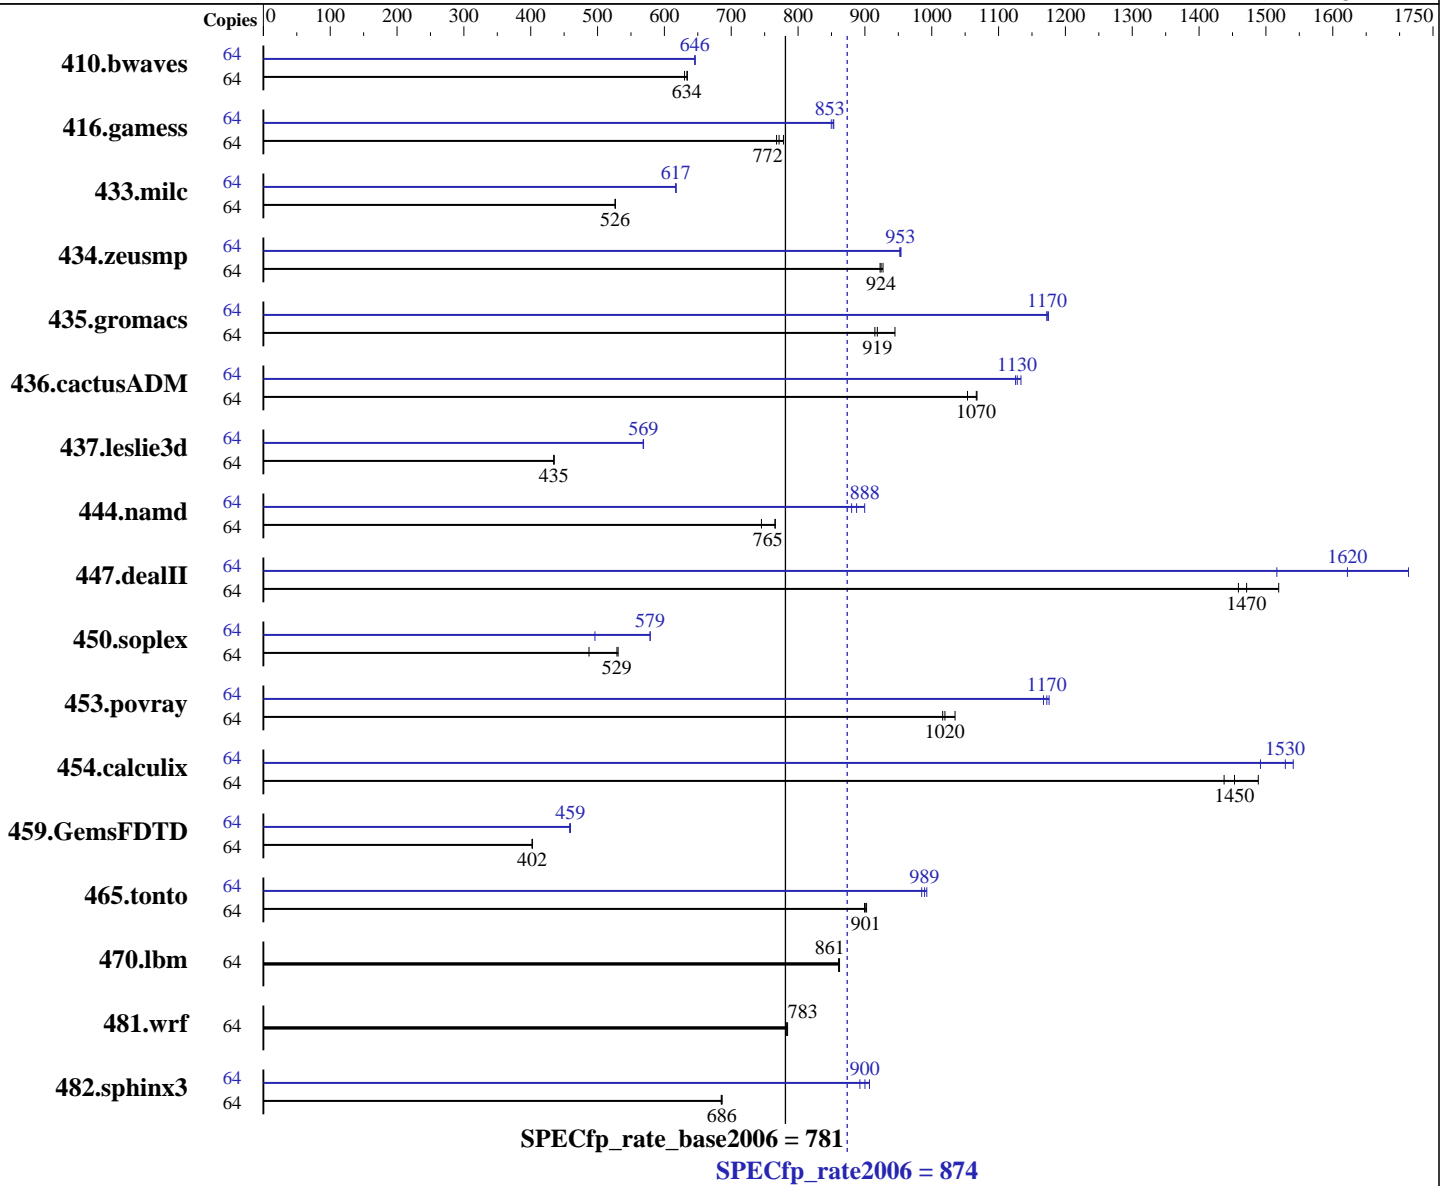

Hardware

CPU Name: AMD Opteron 6386 SE
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.3, Kernel 2.6.32-279.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M915
AMD Opteron 6386 SE

SPECfp_rate2006 = 874

SPECfp_rate_base2006 = 781

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 300 GB 15000 RPM SAS

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1380	630	<u>1372</u>	<u>634</u>	1371	634	64	1346	646	1347	646	<u>1347</u>	<u>646</u>
416.gamess	64	1610	778	1632	768	<u>1624</u>	<u>772</u>	64	1468	853	1475	850	<u>1470</u>	<u>853</u>
433.milc	64	1116	526	1115	527	<u>1116</u>	<u>526</u>	64	952	617	<u>952</u>	<u>617</u>	952	617
434.zeusmp	64	628	927	631	923	<u>630</u>	<u>924</u>	64	611	954	<u>611</u>	<u>953</u>	612	952
435.gromacs	64	484	945	<u>497</u>	<u>919</u>	499	915	64	389	1170	<u>390</u>	<u>1170</u>	390	1170
436.cactusADM	64	<u>717</u>	<u>1070</u>	716	1070	726	1050	64	675	1130	680	1130	<u>678</u>	<u>1130</u>
437.leslie3d	64	1383	435	1384	435	<u>1384</u>	<u>435</u>	64	1058	569	<u>1058</u>	<u>569</u>	1059	568
444.namd	64	<u>671</u>	<u>765</u>	689	745	670	766	64	571	900	583	880	<u>578</u>	<u>888</u>
447.dealII	64	<u>498</u>	<u>1470</u>	482	1520	502	1460	64	483	1520	<u>451</u>	<u>1620</u>	427	1710
450.soplex	64	1096	487	1006	531	<u>1009</u>	<u>529</u>	64	1076	496	<u>922</u>	<u>579</u>	922	579
453.povray	64	329	1030	<u>334</u>	<u>1020</u>	335	1020	64	292	1170	290	1180	<u>290</u>	<u>1170</u>
454.calculix	64	367	1440	355	1490	<u>363</u>	<u>1450</u>	64	354	1490	343	1540	<u>345</u>	<u>1530</u>
459.GemsFDTD	64	1689	402	1686	403	<u>1688</u>	<u>402</u>	64	1478	459	<u>1478</u>	<u>459</u>	1482	458
465.tonto	64	698	903	<u>699</u>	<u>901</u>	700	899	64	639	985	634	993	<u>637</u>	<u>989</u>
470.lbm	64	<u>1021</u>	<u>861</u>	1020	862	1022	861	64	<u>1021</u>	<u>861</u>	1020	862	1022	861
481.wrf	64	911	784	913	783	<u>913</u>	<u>783</u>	64	911	784	913	783	<u>913</u>	<u>783</u>
482.sphinx3	64	<u>1819</u>	<u>686</u>	1817	686	1821	685	64	1375	907	1398	892	<u>1386</u>	<u>900</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M915
AMD Opteron 6386 SE

SPECfp_rate2006 = 874

SPECfp_rate_base2006 = 781

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Operating System Notes (Continued)

```
Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/root/cpu2006-1.2/amd1206-rate-libs-revA/32:/root/cpu2006-1.2/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M915
AMD Opteron 6386 SE

SPECfp_rate2006 = 874

SPECfp_rate_base2006 = 781

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:
-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:
-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M915
AMD Opteron 6386 SE

SPECfp_rate2006 = 874

SPECfp_rate_base2006 = 781

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

Peak Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2
```

C++ benchmarks:

```
444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1
```

```
447.deallI: -Ofast -D_OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1
```

```
450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M915
AMD Opteron 6386 SE

SPECfp_rate2006 = 874

SPECfp_rate_base2006 = 781

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

Peak Optimization Flags (Continued)

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m
-march=bdver1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M915
AMD Opteron 6386 SE

SPECfp_rate2006 = 874

SPECfp_rate_base2006 = 781

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:22:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.