



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 408

Huawei RH2288E v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 399

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

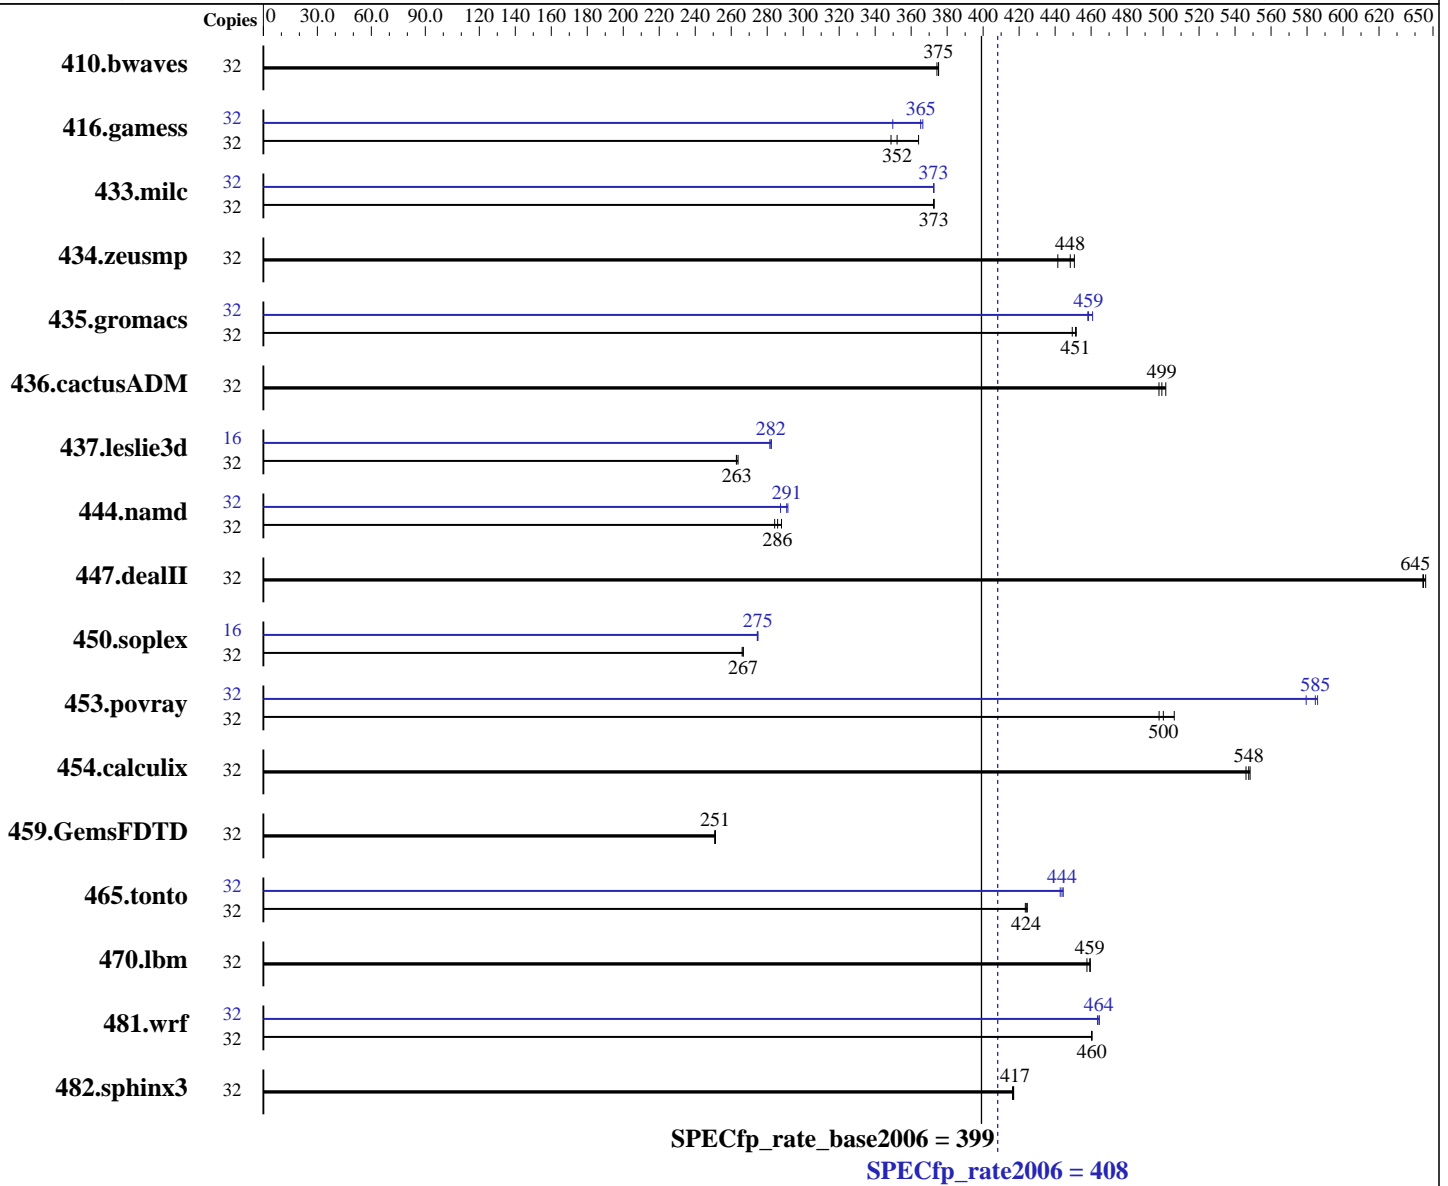

Hardware

CPU Name: Intel Xeon E5-2658
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH2288E v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 399

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx8 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10000RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1162	374	1159	375	<u>1159</u>	<u>375</u>	32	1162	374	1159	375	<u>1159</u>	<u>375</u>
416.gamess	32	1721	364	1796	349	<u>1779</u>	<u>352</u>	32	1791	350	<u>1715</u>	<u>365</u>	1710	366
433.milc	32	<u>788</u>	<u>373</u>	789	372	788	373	32	<u>789</u>	<u>373</u>	789	372	788	373
434.zeusmp	32	646	451	<u>649</u>	<u>448</u>	660	442	32	646	451	<u>649</u>	<u>448</u>	660	442
435.gromacs	32	508	450	506	452	<u>506</u>	<u>451</u>	32	496	461	499	458	<u>498</u>	<u>459</u>
436.cactusADM	32	768	498	763	502	<u>766</u>	<u>499</u>	32	768	498	763	502	<u>766</u>	<u>499</u>
437.leslie3d	32	<u>1144</u>	<u>263</u>	1140	264	1144	263	16	533	282	534	281	<u>533</u>	<u>282</u>
444.namd	32	<u>898</u>	<u>286</u>	891	288	903	284	32	<u>882</u>	<u>291</u>	880	292	893	287
447.dealII	32	568	644	<u>568</u>	<u>645</u>	567	646	32	568	644	<u>568</u>	<u>645</u>	567	646
450.soplex	32	1003	266	<u>1001</u>	<u>267</u>	1001	267	16	<u>486</u>	<u>275</u>	486	275	486	274
453.povray	32	<u>340</u>	<u>500</u>	342	498	336	506	32	294	580	291	586	<u>291</u>	<u>585</u>
454.calculix	32	481	548	<u>482</u>	<u>548</u>	483	546	32	481	548	<u>482</u>	<u>548</u>	483	546
459.GemsFDTD	32	<u>1353</u>	<u>251</u>	1353	251	1351	251	32	<u>1353</u>	<u>251</u>	1353	251	1351	251
465.tonto	32	<u>743</u>	<u>424</u>	742	425	744	423	32	<u>709</u>	<u>444</u>	708	445	711	443
470.lbm	32	957	460	961	458	<u>957</u>	<u>459</u>	32	957	460	961	458	<u>957</u>	<u>459</u>
481.wrf	32	776	460	<u>776</u>	<u>460</u>	777	460	32	771	464	769	465	<u>770</u>	<u>464</u>
482.sphinx3	32	1498	416	<u>1496</u>	<u>417</u>	1496	417	32	1498	416	<u>1496</u>	<u>417</u>	1496	417

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Custom
Baseboard Management Controller used to adjust the fan speed to 100%

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH2288E v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 399

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Platform Notes (Continued)

```
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on wbspeccpu Thu Jul 10 09:00:27 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2658 0 @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132103760 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux wbspeccpu 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 9 17:06
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  270G   37G  220G  15% /
```

```
Additional information from dmidecode:
BIOS Insyde Corp. RMIBV372 12/21/2013
Memory:
 16x Micron 18JSF1G72PDZ-1G6E 8 GB 1600 MHz 2 rank
 8x NO DIMM NO DIMM
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH2288E v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 399

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH2288E v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 399

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH2288E v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 399

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH2288E v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 399

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Aug 4 15:10:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 August 2014.