



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint®2006 = 48.2

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_base2006 = 46.9

CPU2006 license: 13


Test date: Apr-2016

Test sponsor: Intel Corporation

Hardware Availability: Sep-2015

Tested by: Intel Corporation

Software Availability: Aug-2015

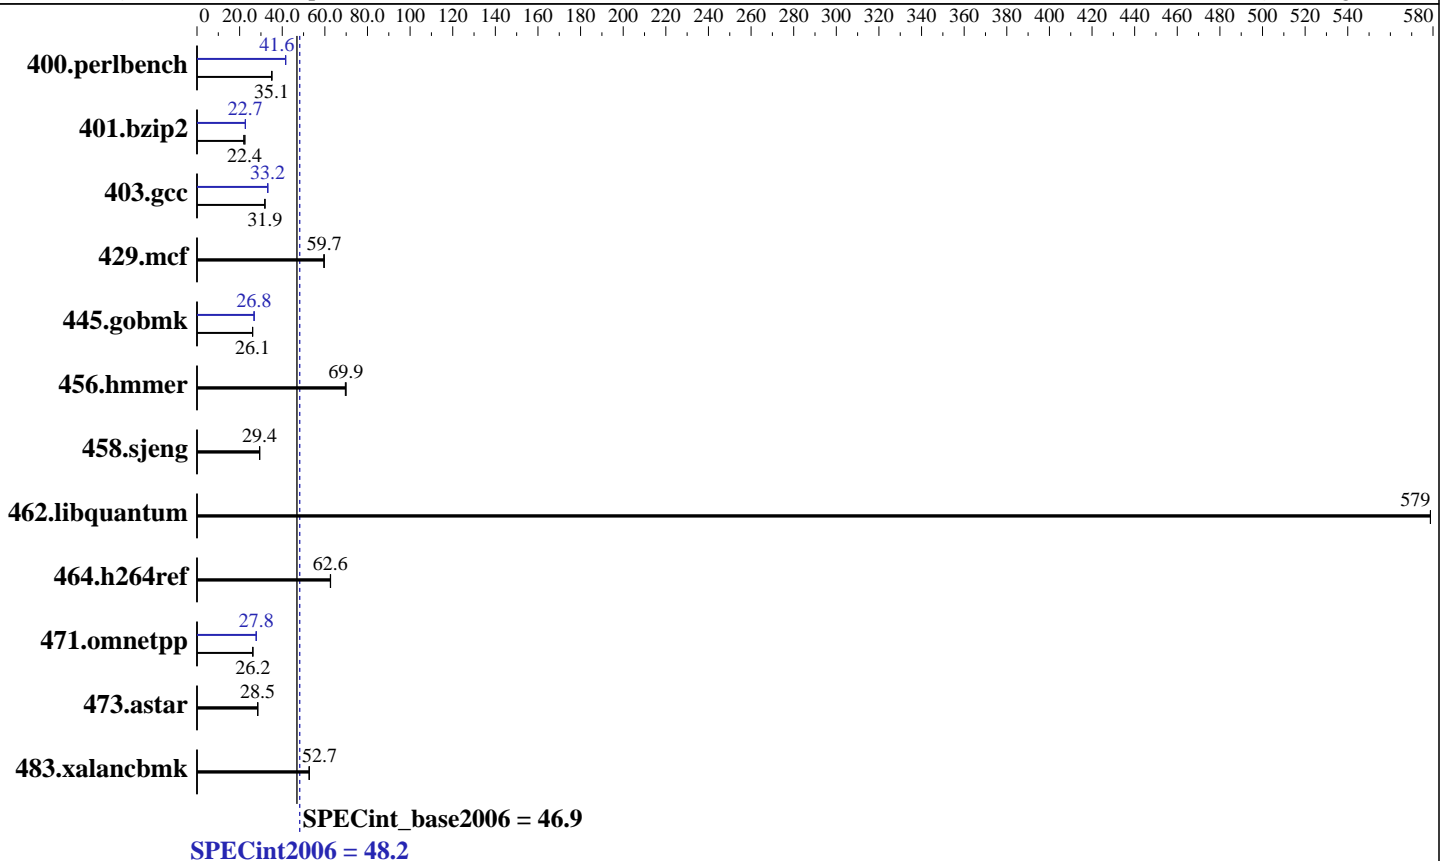

Hardware

CPU Name: Intel Pentium G4500T
 CPU Characteristics:
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC4-2133P-U)
 Disk Subsystem: 1 TB Seagate Barracuda HDD, 7200 RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows 7 Professional 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows;
 Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 11.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 48.2

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_base2006 = 46.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|------------|-------------|-------------|-------------|------------|-------------|-------------|-------------|-------------|-------------|------------|-------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 279 | 35.0 | 278 | 35.2 | <u>278</u> | <u>35.1</u> | <u>235</u> | <u>41.6</u> | 235 | 41.6 | 235 | 41.6 |
| 401.bzip2 | 440 | 21.9 | 430 | 22.5 | <u>431</u> | <u>22.4</u> | <u>426</u> | <u>22.7</u> | 426 | 22.7 | 426 | 22.7 |
| 403.gcc | 253 | 31.8 | 252 | 31.9 | <u>252</u> | <u>31.9</u> | <u>243</u> | <u>33.2</u> | 243 | 33.2 | 243 | 33.2 |
| 429.mcf | 153 | 59.5 | 153 | 59.7 | <u>153</u> | <u>59.7</u> | 153 | 59.5 | 153 | 59.7 | <u>153</u> | <u>59.7</u> |
| 445.gobmk | <u>402</u> | <u>26.1</u> | 402 | 26.1 | 402 | 26.1 | 391 | 26.8 | <u>391</u> | <u>26.8</u> | 391 | 26.8 |
| 456.hmmer | 134 | 69.6 | 133 | 69.9 | <u>133</u> | <u>69.9</u> | 134 | 69.6 | 133 | 69.9 | <u>133</u> | <u>69.9</u> |
| 458.sjeng | 412 | 29.4 | <u>412</u> | <u>29.4</u> | 412 | 29.4 | 412 | 29.4 | <u>412</u> | <u>29.4</u> | 412 | 29.4 |
| 462.libquantum | 35.8 | 579 | <u>35.8</u> | <u>579</u> | 35.8 | 579 | <u>35.8</u> | <u>579</u> | <u>35.8</u> | <u>579</u> | 35.8 | 579 |
| 464.h264ref | 353 | 62.7 | <u>353</u> | <u>62.6</u> | 354 | 62.6 | 353 | 62.7 | <u>353</u> | <u>62.6</u> | 354 | 62.6 |
| 471.omnetpp | 238 | 26.2 | 239 | 26.2 | <u>239</u> | <u>26.2</u> | 225 | 27.8 | <u>225</u> | <u>27.8</u> | 225 | 27.8 |
| 473.astar | 246 | 28.5 | <u>247</u> | <u>28.5</u> | 247 | 28.5 | 246 | 28.5 | <u>247</u> | <u>28.5</u> | 247 | 28.5 |
| 483.xalancbmk | 131 | 52.7 | <u>131</u> | <u>52.7</u> | 131 | 52.6 | 131 | 52.7 | <u>131</u> | <u>52.7</u> | 131 | 52.6 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 16.0 was set up to generate 64-bit binaries with the command:
"psxevars.bat intel64" (shortcut provided in the Intel(r) Parallel Studio XE 2016 program folder)

Platform Notes

Sysinfo program C:\SPEC16.0/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on CltF832E4885A95 Mon Apr 25 12:37:31 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Professional
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)  : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 94 Stepping 3 GenuineIntel ~3001 Mhz
BIOS Version  : American Megatrends Inc. 0704, 1/12/2016
Total Physical Memory: 8,070 MB
```

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 48.2

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_base2006 = 46.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

Platform Notes (Continued)

L2CacheSize : 512
L3CacheSize : 3072
MaxClockSpeed : 3001
Name : Intel(R) Pentium(R) CPU G4500T @ 3.00GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 2

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
+ 64GB memory using Windows 8.1 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Base Portability Flags

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32
471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword -DWIN64



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 48.2

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_base2006 = 46.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F64000000

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F64000000 shlw64M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:

icl -Qvc12 -Qstd=c99

C++ benchmarks:

icl -Qvc12

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F64000000 shlw64M.lib
/F256000000 -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
-Qauto-ilp32 /F64000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F64000000

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 48.2

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_base2006 = 46.9

CPU2006 license: 13

Test date: Apr-2016

Test sponsor: Intel Corporation

Hardware Availability: Sep-2015

Tested by: Intel Corporation

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F64000000

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block -Qauto-ilp32 /F64000000
shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 48.2

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_base2006 = 46.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 12 11:02:44 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.