



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 1860

PowerEdge R940 (Intel Xeon Gold 6134, 3.20 GHz)

SPECfp_rate_base2006 = 1800

CPU2006 license: 55


Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

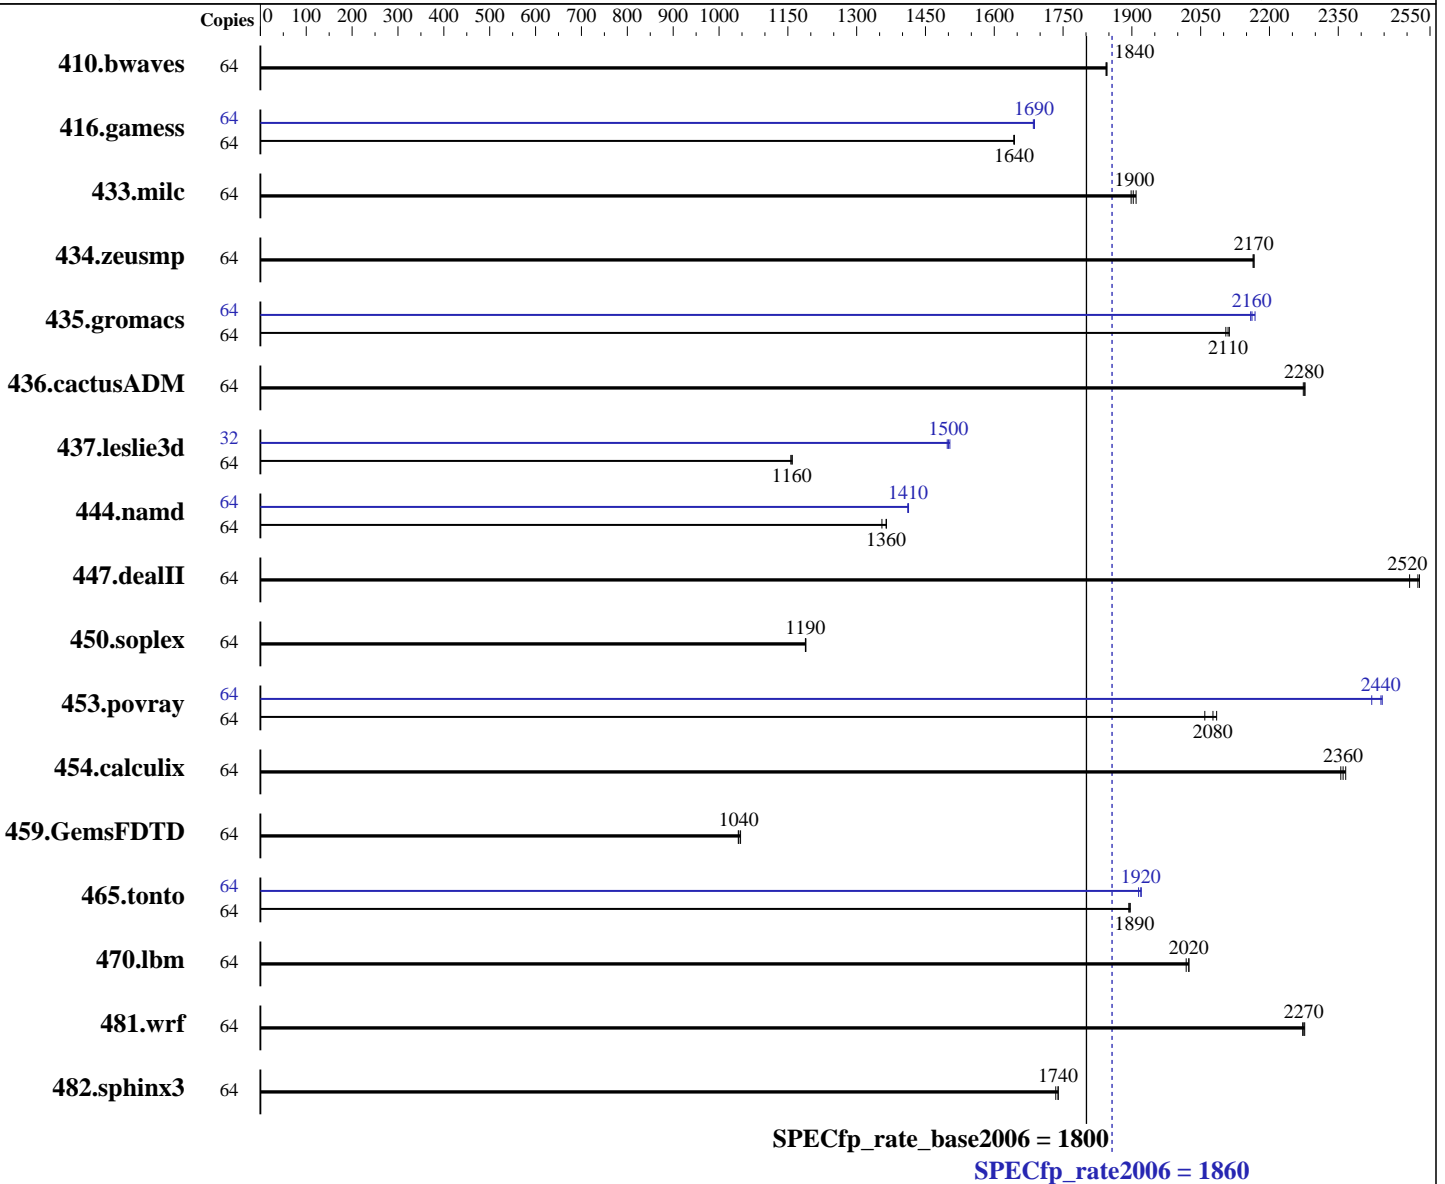

Hardware

CPU Name: Intel Xeon Gold 6134
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2
 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran
 Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1860

PowerEdge R940 (Intel Xeon Gold 6134, 3.20 GHz)

SPECfp_rate_base2006 = 1800

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

L3 Cache: 24.75 MB I+D on chip per chip
Other Cache: None
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 960 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	471	1850	472	1840	<u>472</u>	<u>1840</u>	64	471	1850	472	1840	<u>472</u>	<u>1840</u>
416.gamess	64	763	1640	<u>762</u>	<u>1640</u>	762	1640	64	744	1690	743	1690	<u>743</u>	<u>1690</u>
433.milc	64	309	1900	308	1910	<u>309</u>	<u>1900</u>	64	309	1900	308	1910	<u>309</u>	<u>1900</u>
434.zeusmp	64	<u>269</u>	<u>2170</u>	269	2160	269	2170	64	<u>269</u>	<u>2170</u>	269	2160	269	2170
435.gromacs	64	216	2110	217	2100	<u>217</u>	<u>2110</u>	64	<u>211</u>	<u>2160</u>	211	2170	212	2160
436.cactusADM	64	336	2280	<u>336</u>	<u>2280</u>	336	2270	64	336	2280	<u>336</u>	<u>2280</u>	336	2270
437.leslie3d	64	520	1160	519	1160	<u>519</u>	<u>1160</u>	32	201	1500	<u>201</u>	<u>1500</u>	200	1500
444.namd	64	376	1360	379	1360	<u>376</u>	<u>1360</u>	64	364	1410	363	1410	<u>363</u>	<u>1410</u>
447.dealII	64	290	2530	292	2510	<u>290</u>	<u>2520</u>	64	290	2530	292	2510	<u>290</u>	<u>2520</u>
450.soplex	64	<u>449</u>	<u>1190</u>	449	1190	449	1190	64	<u>449</u>	<u>1190</u>	449	1190	449	1190
453.povray	64	163	2080	<u>164</u>	<u>2080</u>	165	2060	64	139	2450	<u>139</u>	<u>2440</u>	141	2420
454.calculix	64	223	2370	224	2360	<u>224</u>	<u>2360</u>	64	223	2370	224	2360	<u>224</u>	<u>2360</u>
459.GemsFDTD	64	649	1050	652	1040	<u>651</u>	<u>1040</u>	64	649	1050	652	1040	<u>651</u>	<u>1040</u>
465.tonto	64	332	1900	333	1890	<u>332</u>	<u>1890</u>	64	328	1920	<u>328</u>	<u>1920</u>	329	1910
470.lbm	64	436	2020	<u>434</u>	<u>2020</u>	434	2020	64	436	2020	<u>434</u>	<u>2020</u>	434	2020
481.wrf	64	315	2270	314	2280	<u>314</u>	<u>2270</u>	64	315	2270	314	2280	<u>314</u>	<u>2270</u>
482.sphinx3	64	719	1730	<u>717</u>	<u>1740</u>	717	1740	64	719	1730	<u>717</u>	<u>1740</u>	717	1740

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Sub NUMA Cluster enabled
Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1860

PowerEdge R940 (Intel Xeon Gold 6134, 3.20 GHz)

SPECfp_rate_base2006 = 1800

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Platform Notes (Continued)

System Profile set to Custom
 CPU Performance set to Maximum Performance
 C States set to autonomous
 C1E disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance
 Memory Patrol Scrub disabled
 Logical Processor enabled
 CPU Interconnect Bus Link Power Management disabled
 PCI ASPM L1 Link Power Management disabled
 Sysinfo program /home/cpu2006-1.2_icl17u3/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-kj6v Tue May 23 16:01:48 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6134 CPU @ 3.20GHz
 4 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 2 3 9 16 19 26 27
  physical 1: cores 1 2 4 9 18 19 24 27
  physical 2: cores 0 2 3 9 16 19 26 27
  physical 3: cores 0 2 4 5 6 16 20 21
cache size : 25344 KB
```

```
From /proc/meminfo
MemTotal:      791001148 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1860

PowerEdge R940 (Intel Xeon Gold 6134, 3.20 GHz)

SPECfp_rate_base2006 = 1800

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Platform Notes (Continued)

```

VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

```

uname -a:
Linux linux-kj6v 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 23 07:59

```

SPEC is set to: /home/cpu2006-1.2_ic17u3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   796G  6.4G  789G   1% /home
Additional information from dmidecode:

```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS Dell Inc. 1.0.0 05/16/2017
Memory:
48x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2_ic17u3/lib/ia32:/home/cpu2006-1.2_ic17u3/lib/intel64:/home/cpu2006-1.2_ic17u3/sh10.2"

```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1860

PowerEdge R940 (Intel Xeon Gold 6134, 3.20 GHz)

SPECfp_rate_base2006 = 1800

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1860

PowerEdge R940 (Intel Xeon Gold 6134, 3.20 GHz)

SPECfp_rate_base2006 = 1800

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1860

PowerEdge R940 (Intel Xeon Gold 6134, 3.20 GHz)

SPECfp_rate_base2006 = 1800

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 12 12:12:44 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 July 2017.