SPECweb96 Result

©Copyright 1996, Standards Performance Evaluation Corporation

IBM
RS/6000 43P-260

SPECweb96= 4597

Test Date : Aug-99
Tested by : IBM Austin

Hardware Avail:	Oct-98	OS Avail:	Sep-99	HTTP Software Avail:	Aug-99	SPEC license #:	11

Throughput ops/sec	Response msec
460	1.5
920	1.5
1380	1.5
1840	1.6
2300	1.6
2760	1.7
3220	1.8
3680	1.9
4140	2.1
4597	2.5

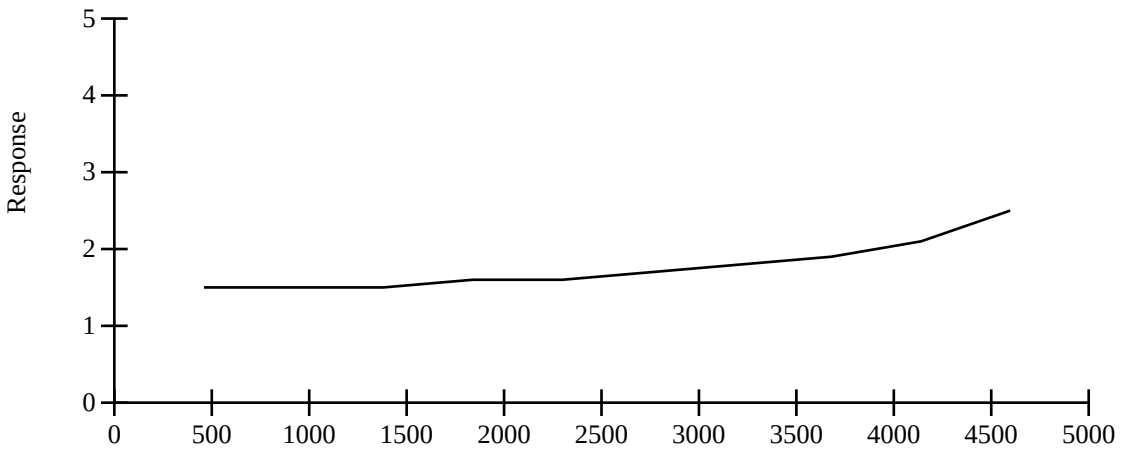

Hardware

Model Name:	RS/6000 43P-260
Processor:	200 MHz POWER3
# of Processors:	2
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	4MB(I+D) off chip
Other Cache:	None
Memory:	4096 MB
Disk Subsystem:	3 9.1GB 16 Bits SCSI Disk Drive
Disk Controllers:	Wide/Fast-20 SCSI I/O Controller
Other Hardware:	Alteon ACEswitch 180 Ethernet switch

Software

Operating System:	AIX 4.3.3
File System:	JFS
Other Software:	None

HTTP Software

Vendor:	IBM
HTTP Software:	IBM HTTP Server 1.3.6
# of "threads":	2
Server Cache:	FRCA(Integrated)
Log Mode:	Common Log Format

Network

# of Controllers:	2
Network Controllers:	Gigabit Ethernet-SX PCI Adapter
# of Nets:	2
Type of Nets:	Jumbo Frame Gigabit
Network Speed:	1 Gigabit/sec
Time Wait (secs):	60 (Non RFC1122)

Load Generators

# of Load Generators:	6
# of Processes Each:	12
Model:	6 RS/6000 43P-260
Processor:	200 MHz POWER3
# of CPUs:	2
Memory:	1024 MB
OS:	AIX 4.3.2
Compiler:	IBM Cset++ Version 3.1.3

Benchmark Configuration

Max Requested Load:	4600
Max Fileset Size (MB):	1484

Notes/Tuning Information

A line in your notes/tuning section is too long or you have too many lines.
Please fix the problem and try again

For More Information contact

SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110

(703) 331-0180
info@spec.org
http://www.spec.org/