



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 14.8

ProLiant DL365 G5
(2.3 GHz AMD Opteron 2356)

SPECint_base2006 = 13.2

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

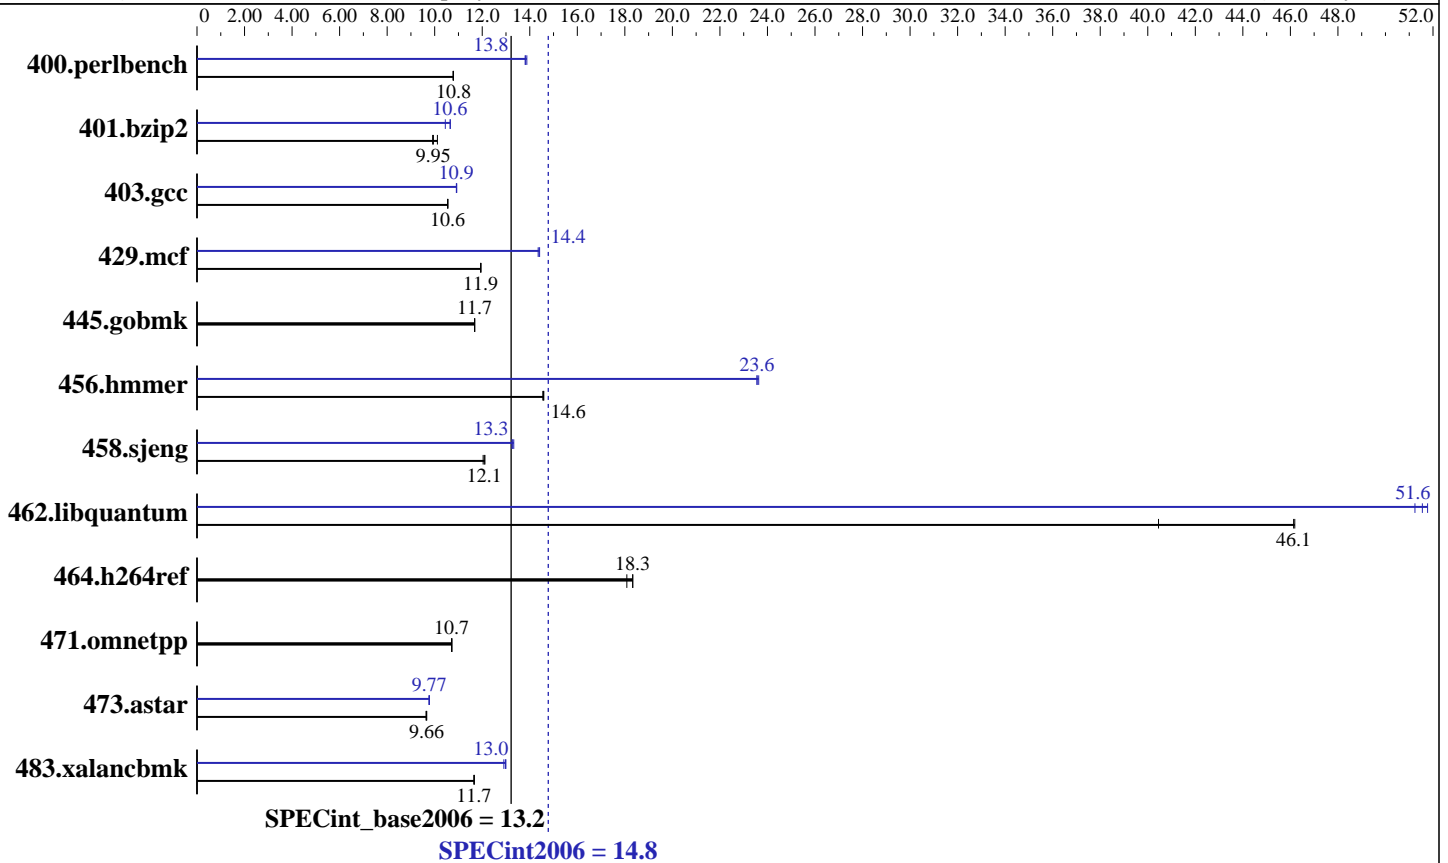

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8x4 GB, PC2-5300P CL5)
 Disk Subsystem: 1x72 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils-2.18.50, SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL365 G5
(2.3 GHz AMD Opteron 2356)

SPECint2006 = 14.8

SPECint_base2006 = 13.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2008
Hardware Availability: Mar-2008
Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>905</u>	<u>10.8</u>	905	10.8	907	10.8	<u>704</u>	13.9	708	13.8	<u>707</u>	<u>13.8</u>
401.bzip2	<u>970</u>	<u>9.95</u>	973	9.91	954	10.1	924	10.4	905	10.7	<u>906</u>	<u>10.6</u>
403.gcc	763	10.6	763	10.5	<u>763</u>	<u>10.6</u>	<u>738</u>	<u>10.9</u>	737	10.9	738	10.9
429.mcf	<u>764</u>	<u>11.9</u>	763	11.9	764	11.9	633	14.4	<u>634</u>	<u>14.4</u>	635	14.4
445.gobmk	898	11.7	898	11.7	<u>898</u>	<u>11.7</u>	898	11.7	898	11.7	<u>898</u>	<u>11.7</u>
456.hammer	<u>640</u>	<u>14.6</u>	641	14.5	639	14.6	<u>396</u>	<u>23.6</u>	395	23.6	396	23.6
458.sjeng	1005	12.0	999	12.1	<u>1001</u>	<u>12.1</u>	913	13.3	908	13.3	<u>911</u>	<u>13.3</u>
462.libquantum	<u>449</u>	<u>46.1</u>	449	46.2	512	40.5	<u>402</u>	<u>51.6</u>	404	51.2	400	51.8
464.h264ref	1224	18.1	<u>1207</u>	<u>18.3</u>	1207	18.3	1224	18.1	<u>1207</u>	<u>18.3</u>	1207	18.3
471.omnetpp	583	10.7	<u>583</u>	<u>10.7</u>	583	10.7	<u>583</u>	<u>10.7</u>	<u>583</u>	<u>10.7</u>	583	10.7
473.astar	729	9.63	<u>727</u>	<u>9.66</u>	726	9.67	719	9.76	<u>718</u>	<u>9.77</u>	718	9.78
483.xalancbmk	<u>592</u>	<u>11.7</u>	592	11.7	591	11.7	534	12.9	531	13.0	<u>532</u>	<u>13.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
PGI_HUGE_PAGES set to 896
Total number of huge pages available is 7168
NCPUS set to number of cores
numactl used to bind processes to CPUs

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 14.8

ProLiant DL365 G5
(2.3 GHz AMD Opteron 2356)

SPECint_base2006 = 13.2

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:
 -fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mloop32
 -Mconcur=innermost -Msmartalloc=huge:896 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
 -fastsse -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mloop32
 -Msmartalloc=huge:896 --zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:
 -w

C++ benchmarks:
 -w

Peak Compiler Invocation

C benchmarks:
 pgcc

C++ benchmarks:
 pgcpp

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 14.8

ProLiant DL365 G5
(2.3 GHz AMD Opteron 2356)

SPECint_base2006 = 13.2

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Portability Flags (Continued)

445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:8(pass 2)
-Mipa=inline(pass 2) -fast -O4 -Mfprelaxed
-Msmartalloc=huge:896 -Mnounroll -Mno vect -tp barcelona-64
-Bstatic_pgi

401.bzip2: -Mpfi(pass 1) -Mconcur=innermost(pass 2) -Mpfo(pass 2)
-fast -O4 -Msmartalloc=huge:896 -Mnounroll
-tp barcelona-64 -Bstatic_pgi

403.gcc: -Mpfi(pass 1) -Mpfo(pass 2) -Mconcur(pass 2)
-Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Mfprelaxed
-Msmartalloc=huge:896 -tp barcelona -Bstatic_pgi

429.mcf: -fastsse -Mconcur -Mipa=jobs:8 -Mipa=fast -Mipa=inline:1
-Msmartalloc=huge:896 -Mloop32 -tp barcelona -Bstatic_pgi

445.gobmk: basepeak = yes

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:896 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=jobs:8 -Mipa=const
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
-Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mconcur(pass 2)
-Mpfo(pass 2) -fastsse -Msmartalloc=huge:896 -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc -Mvect=nosse
-Munroll=m:8 -Mconcur=innermost -Mconcur=noaltcode
-Mipa=jobs:8 -Mipa=fast -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 14.8

ProLiant DL365 G5
(2.3 GHz AMD Opteron 2356)

SPECint_base2006 = 13.2

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mphi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -O4
-Msmartalloc=huge:896 -Mfprelaxed -Mloop32 --zc_eh
-tp barcelona -Bstatic_pgi

483.xalancbmk: -fastsse -O4 -Mipa=jobs:8 -Mipa=fast -Mipa=inline
-Mfprelaxed -Msmartalloc -Mloop32 --zc_eh -tp barcelona
-Bstatic_pgi
-L/proj/qa/smartheap/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:50:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 April 2008.