



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]_rate2006 = 119

PowerEdge M805 (AMD Opteron 2376, 2.30 GHz)

SPECint_rate_base2006 = 99.7

CPU2006 license: 55


Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

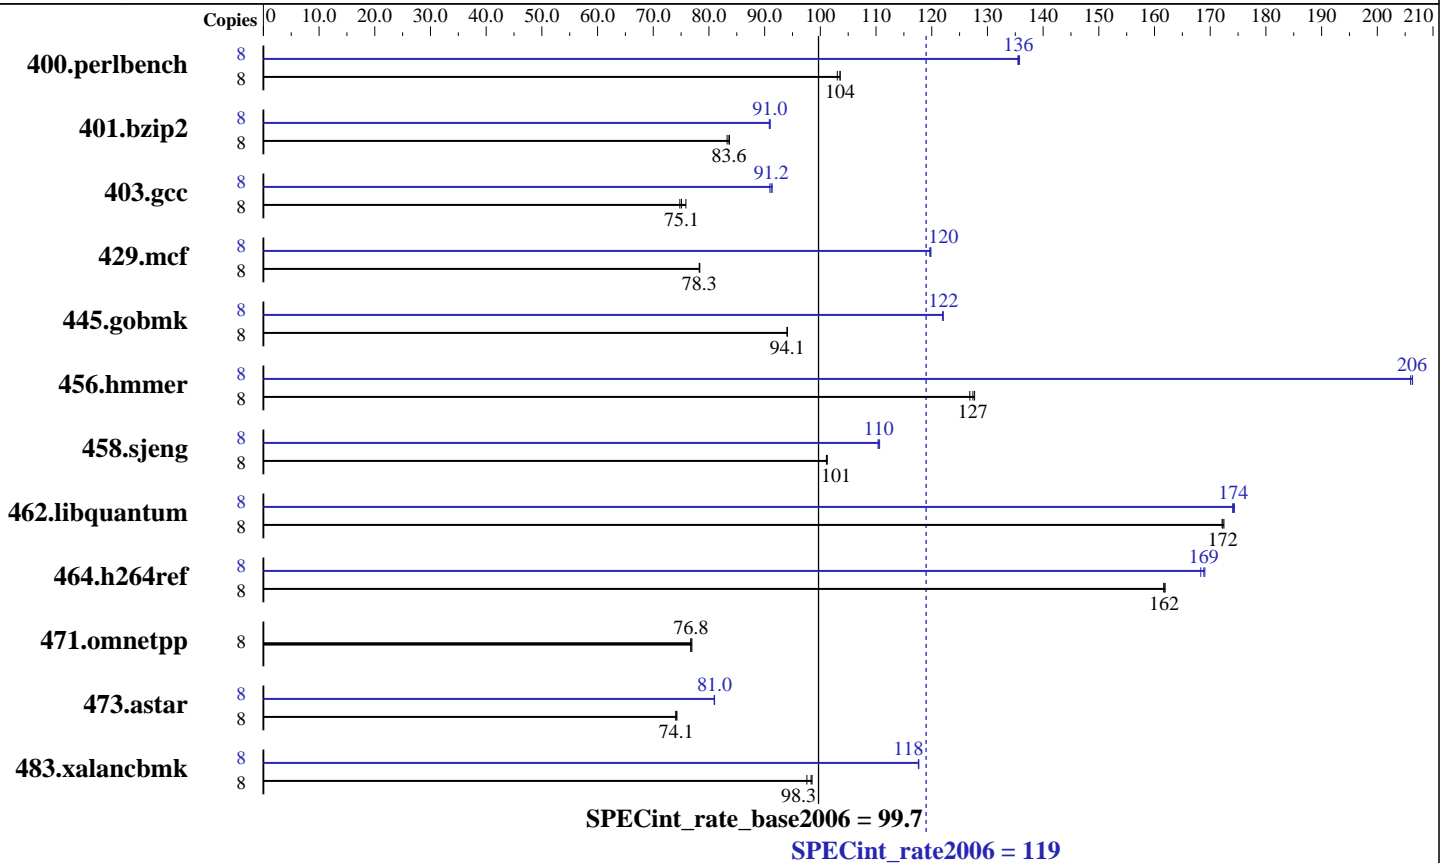

Hardware

CPU Name: AMD Opteron 2376
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB DDR2-800)
 Disk Subsystem: 1 x 36 GB 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18 32-bit and 64-bit libhugetlbfs libraries SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 119

PowerEdge M805 (AMD Opteron 2376, 2.30 GHz)

SPECint_rate_base2006 = 99.7

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	758	103	<u>755</u>	<u>104</u>	755	104	8	<u>576</u>	<u>136</u>	576	136	577	135
401.bzip2	8	<u>924</u>	<u>83.6</u>	927	83.3	923	83.7	8	850	90.8	848	91.0	<u>849</u>	<u>91.0</u>
403.gcc	8	861	74.8	849	75.9	<u>858</u>	<u>75.1</u>	8	<u>706</u>	<u>91.2</u>	705	91.4	708	90.9
429.mcf	8	932	78.3	931	78.4	<u>932</u>	<u>78.3</u>	8	<u>609</u>	<u>120</u>	609	120	610	120
445.gobmk	8	<u>892</u>	<u>94.1</u>	893	94.0	892	94.1	8	<u>688</u>	<u>122</u>	688	122	688	122
456.hammer	8	588	127	584	128	<u>586</u>	<u>127</u>	8	362	206	362	206	<u>362</u>	<u>206</u>
458.sjeng	8	956	101	<u>957</u>	<u>101</u>	958	101	8	877	110	875	111	<u>876</u>	<u>110</u>
462.libquantum	8	<u>962</u>	<u>172</u>	963	172	961	172	8	951	174	953	174	<u>952</u>	<u>174</u>
464.h264ref	8	1093	162	<u>1095</u>	<u>162</u>	1095	162	8	1052	168	1047	169	<u>1049</u>	<u>169</u>
471.omnetpp	8	650	76.9	651	76.7	<u>651</u>	<u>76.8</u>	8	650	76.9	651	76.7	<u>651</u>	<u>76.8</u>
473.astar	8	759	74.0	<u>758</u>	<u>74.1</u>	756	74.3	8	<u>693</u>	<u>81.0</u>	693	81.0	694	80.9
483.xalancbmk	8	560	98.5	566	97.6	<u>561</u>	<u>98.3</u>	8	469	118	<u>469</u>	<u>118</u>	469	118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 119

PowerEdge M805 (AMD Opteron 2376, 2.30 GHz)

SPECint_rate_base2006 = 99.7

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 119

PowerEdge M805 (AMD Opteron 2376, 2.30 GHz)

SPECint_rate_base2006 = 99.7

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmcr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
 -IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
 -CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
 -OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
 -m3dnow
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
 -LNO:trip_count=256 -LNO:prefetch_ahead=10
 -CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -L/usr/lib -lhugetlbfs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 119

PowerEdge M805 (AMD Opteron 2376, 2.30 GHz)

SPECint_rate_base2006 = 99.7

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
 -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
 -LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
 -LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
 -OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
 -Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
 -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
 -Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
 -O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
 --zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
 -L/root/work/libraries/SmartHeap_8.1/lib -lsmarheap

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 119

PowerEdge M805 (AMD Opteron 2376, 2.30 GHz)

SPECint_rate_base2006 = 99.7

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Other Flags (Continued)

456.hmmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:33:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 December 2008.